


CD0354

MOTOR

IN BASE

115V LINE PLUG

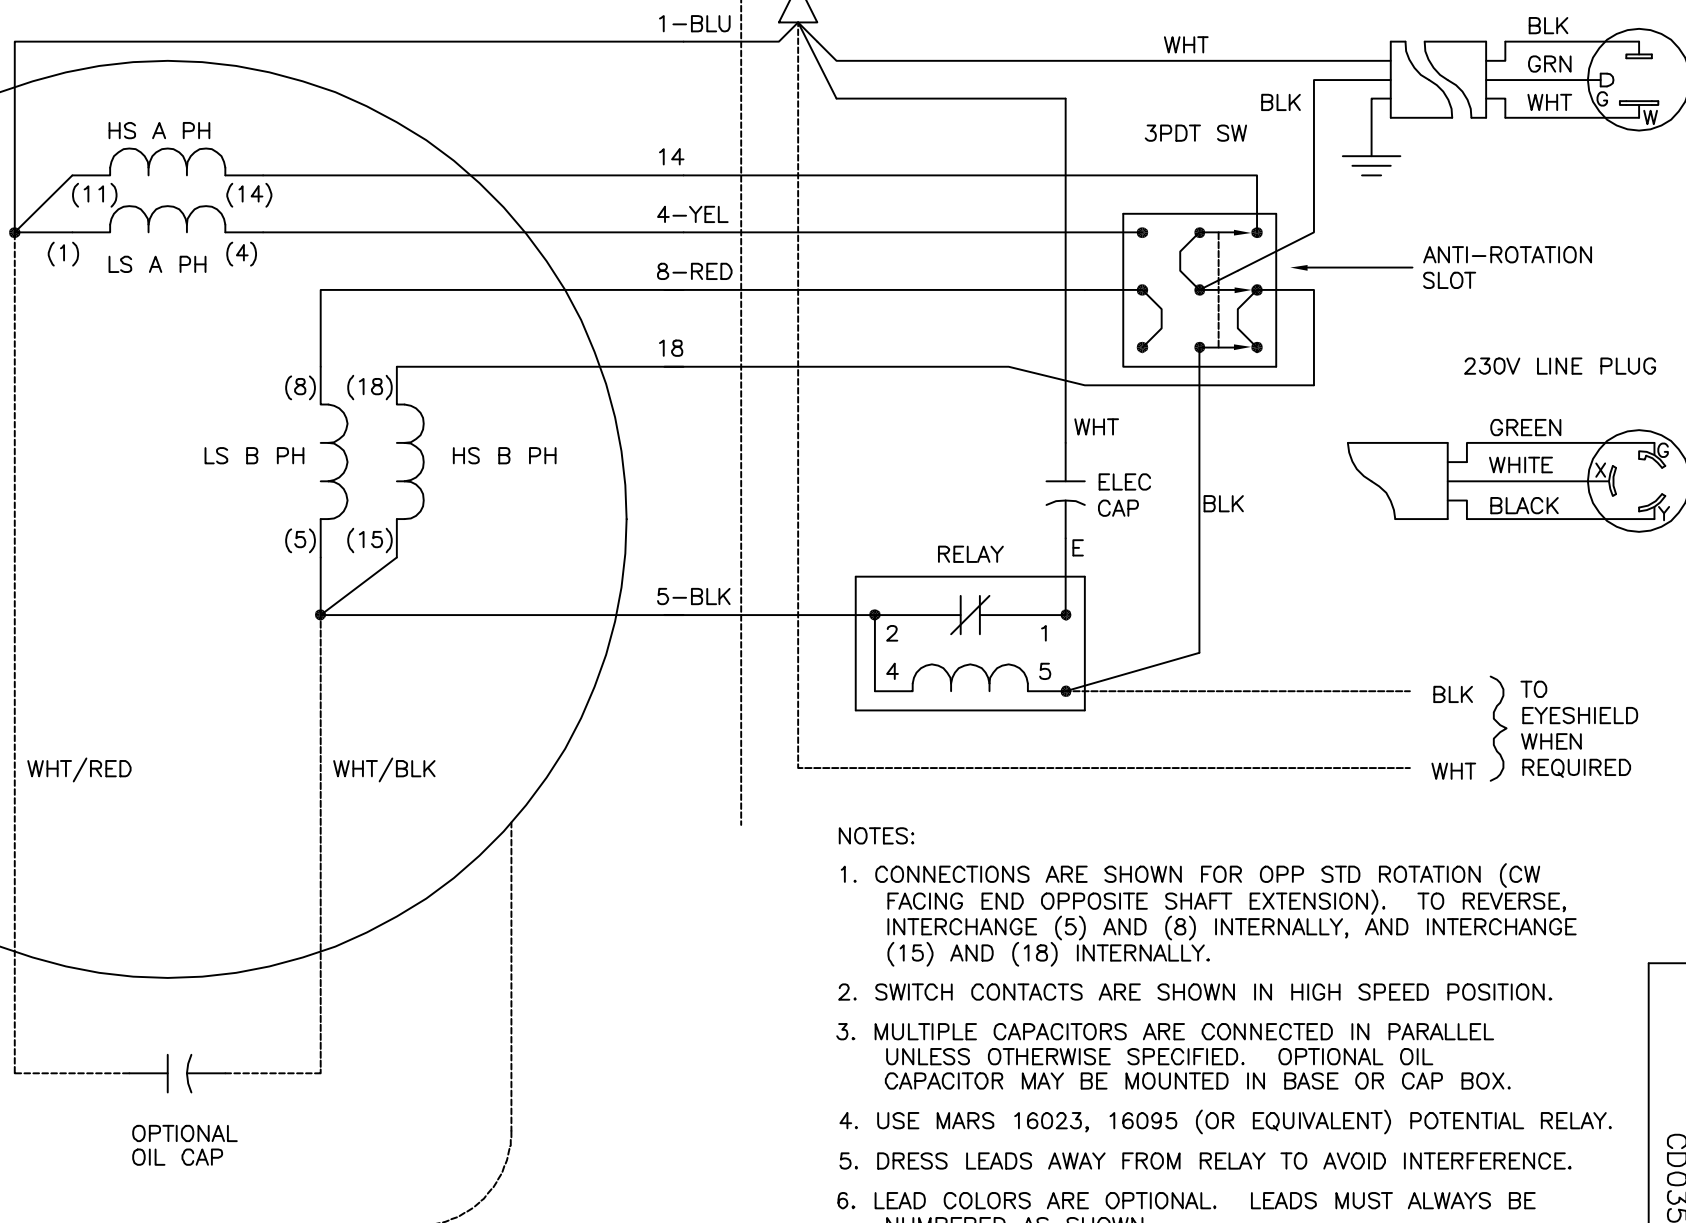

NOTES:

1. CONNECTIONS ARE SHOWN FOR OPP STD ROTATION (CW FACING END OPPOSITE SHAFT EXTENSION). TO REVERSE, INTERCHANGE (5) AND (8) INTERNALLY, AND INTERCHANGE (15) AND (18) INTERNALLY.
2. SWITCH CONTACTS ARE SHOWN IN HIGH SPEED POSITION.
3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED. OPTIONAL OIL CAPACITOR MAY BE MOUNTED IN BASE OR CAP BOX.
4. USE MARS 16023, 16095 (OR EQUIVALENT) POTENTIAL RELAY.
5. DRESS LEADS AWAY FROM RELAY TO AVOID INTERFERENCE.
6. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: DESCRIPTION WAS REV

REV. LTR: H

VERSION: 02

TDR: 000000519206

FILE: \AAA\00013\558

REVISED: 10:47:22 11/17/2009

MTL: -

BY: ENJOEPO

BALDOR • DODGE • RELIANCE

TYPE L OR LC, SV, FIX, 2S-4W, RELAY, SPD CHG SW, CD & PLUG, GRINDER

SH 1 of 1

CD0354