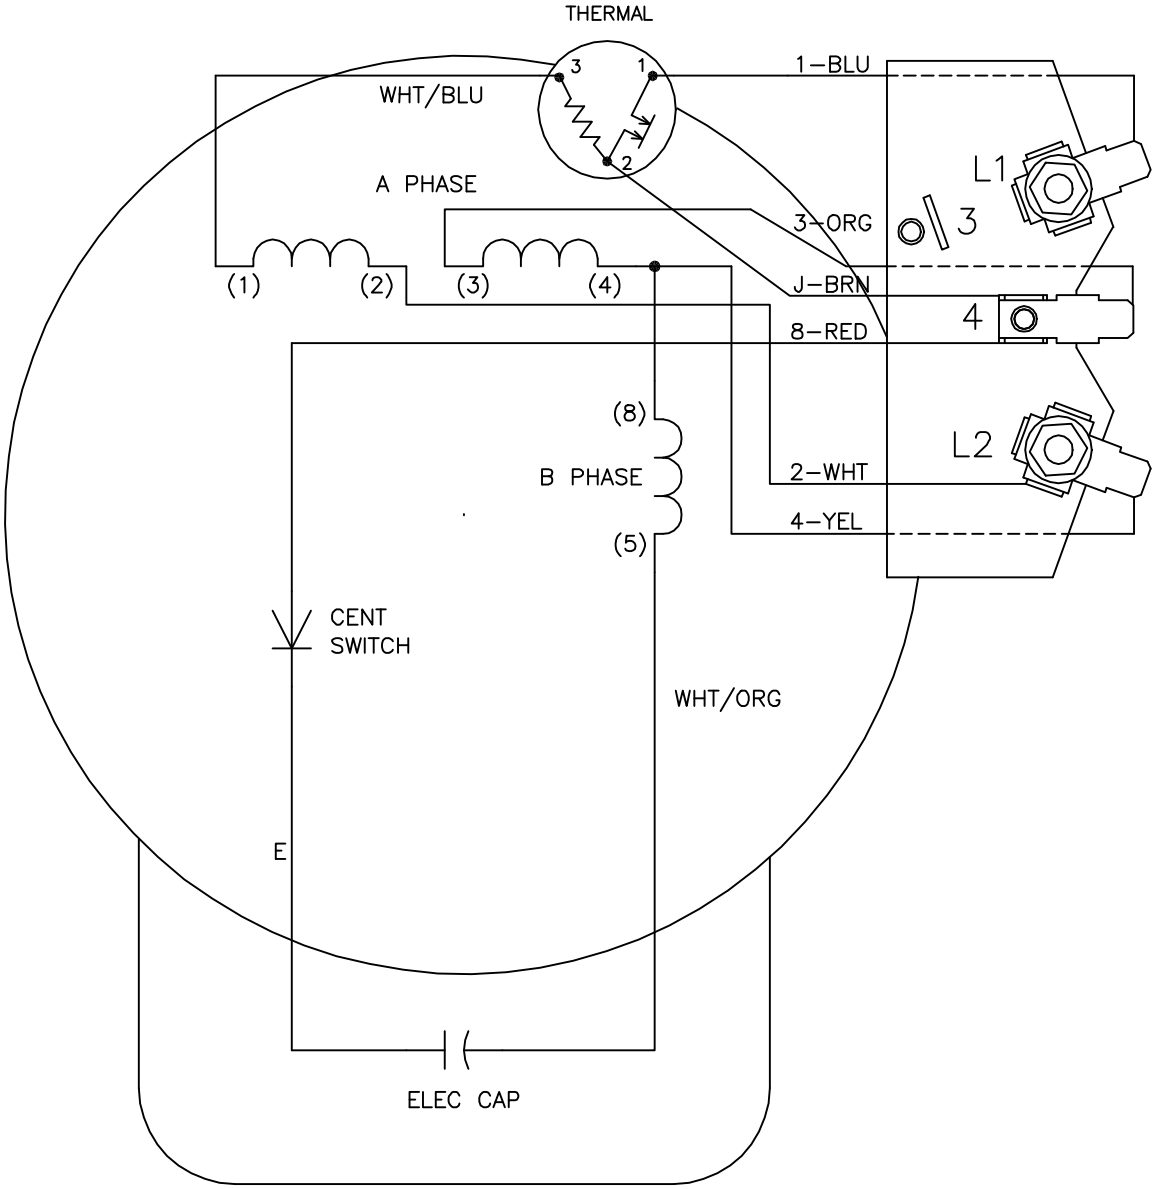

NOTES:

1. CONNECT LINE LEADS TO L1 AND L2.
   LOW VOLTAGE: CONNECT AS SHOWN.
   HIGH VOLTAGE: MOVE LEAD J TO TERM. 3.
   MOVE LEAD 2 TO TERM. 4.
2. CONNECTIONS ARE SHOWN FOR OPPOSITE STANDARD ROTATION (CW FACING END OPPOSITE SHAFT EXTENSION). INTERCHANGE 5 AND 8 INTERNALLY FOR STANDARD ROTATION.
3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REMOVE OPTIONAL THERMAL CONNECTION			BALDOR ELECTRIC Co.
REV. LTR: F	VERSION: 01	TDR: 000000373039	
CD0307	FILE: \AAA\00007\308	REVISED: 11:45:00 08/11/2005	TYPE L, DV, FIX ROT, THERMAL, TERMINAL PLATE (OPP STD)
	MTL: –	BY: ENJOEPO	

CD0307