


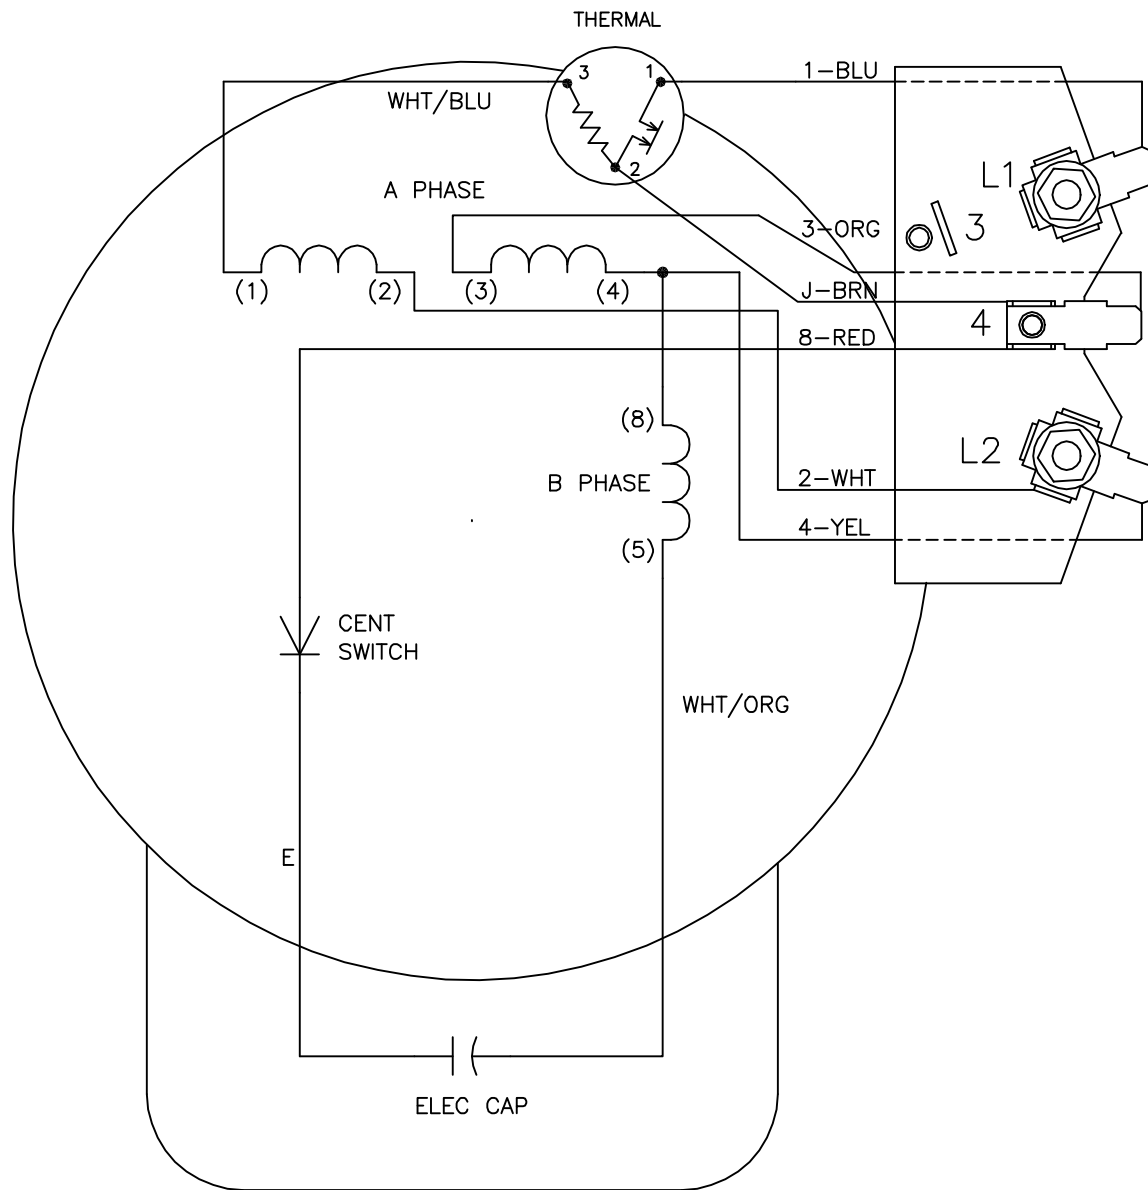

## NOTES:

1. CONNECT LINE LEADS TO L1 AND L2.  
LOW VOLTAGE: CONNECT AS SHOWN.  
HIGH VOLTAGE: MOVE LEAD J TO TERM. 3.  
MOVE LEAD 2 TO TERM. 4.
2. CONNECTIONS ARE SHOWN FOR OPPOSITE STANDARD  
ROTATION (CW FACING END OPPOSITE SHAFT EXTENSION).  
INTERCHANGE 5 AND 8 INTERNALLY FOR STANDARD  
ROTATION.
3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL  
UNLESS OTHERWISE SPECIFIED.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE  
NUMBERED AS SHOWN.

REV. DESC: REMOVE OPTIONAL THERMAL CONNECTION

REV. LTR: F

VERSION: 01

TDR: 000000373039

LOQODD

FILE: \AAA\00007\308

REVISED: 11:45:00 08/11/2005

MTL: -

BY: ENJOEPO

BALDOR ELECTRIC Co.

TYPE L, DV, FIX ROT, THERMAL, TERMINAL PLATE (OPP STD)