



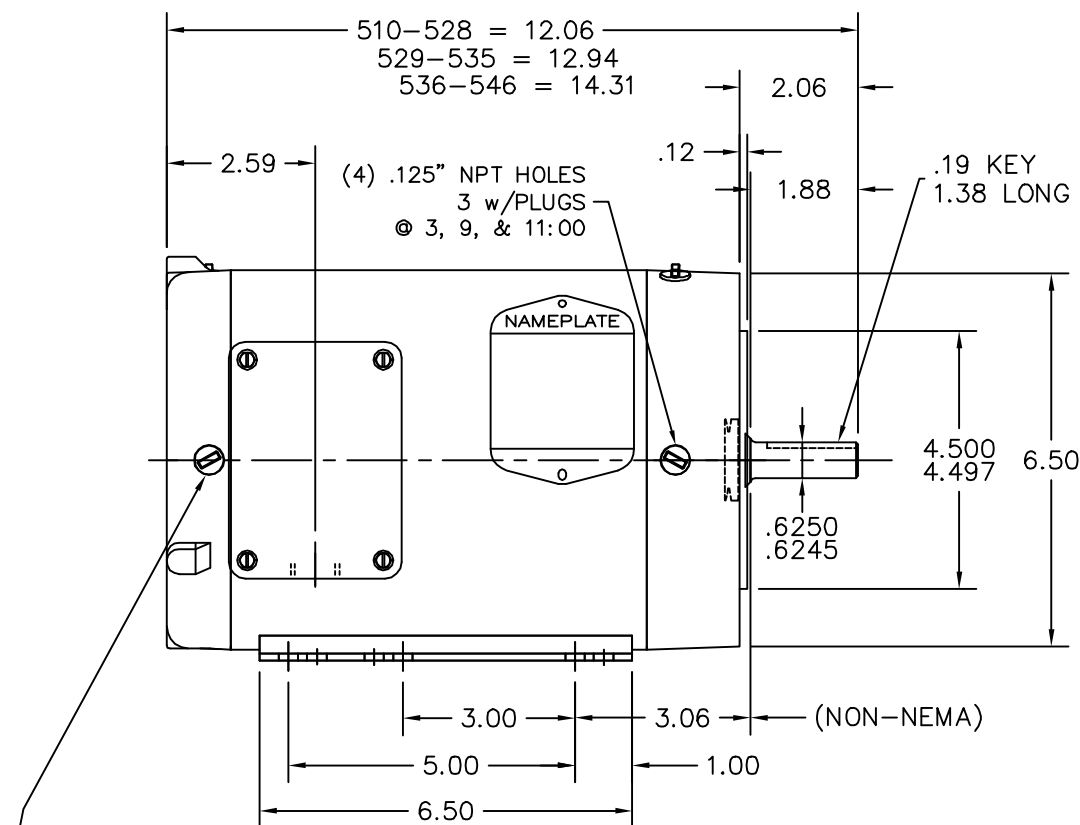


(4) .125 NPT HOLES
3 w/PLUGS
@ 3, 9, & 11:00



PULLEY END DETAIL

APPLY COAT OF
RED SEALER TO
HOUSING BEFORE
PRESSING SEAL IN

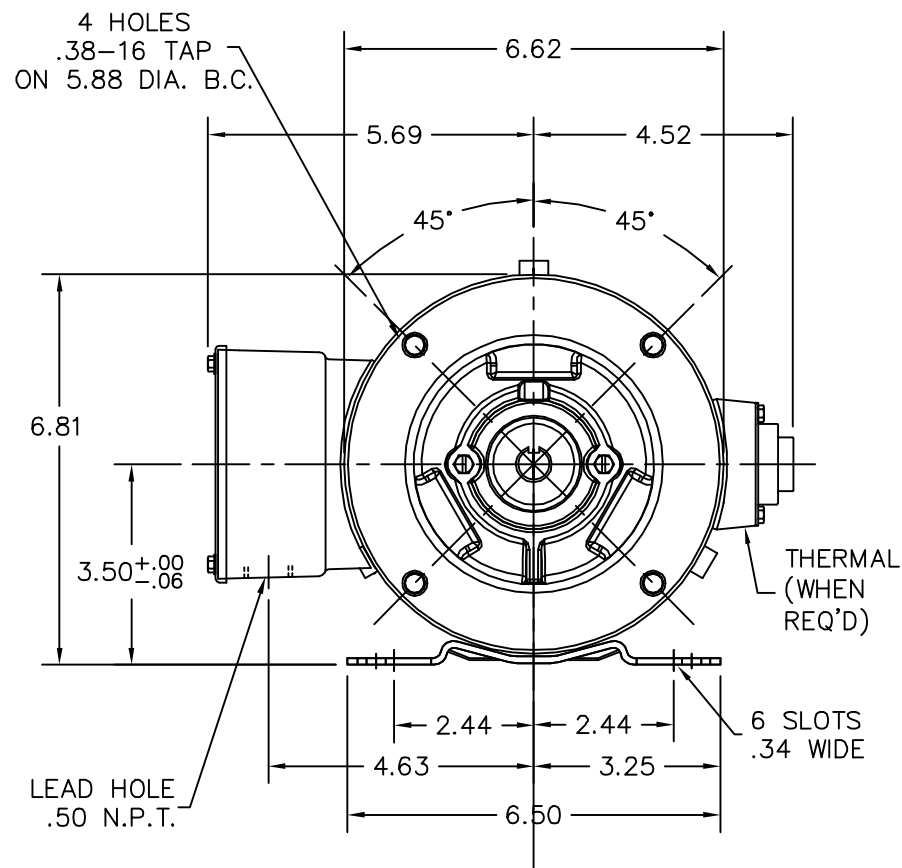

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: UPDATE ENDPLATES AND NOTES

REV. LTR: A

VERSION: 01

TDR: 000001076108

FILE: \AAA\00189\330

REVISED: 06:19:51 06/26/2018

BY: FGCHAH1

MTL: -



BALDOR - RELIANCE®

HORZ 56HC TENV 35M WD

SH 1 of 1