

DUTY MASTER ALTERNATING CURRENT MOTORS

SQUIRREL-CAGE INDUCTION
CAST IRON CONSTRUCTION

FRAMES 444TS-445TS

COOLING: SELF-VENTILATED

ENCLOSURE: PROTECTED
MOUNTING: FOOT



617428-041

D

C

B

A

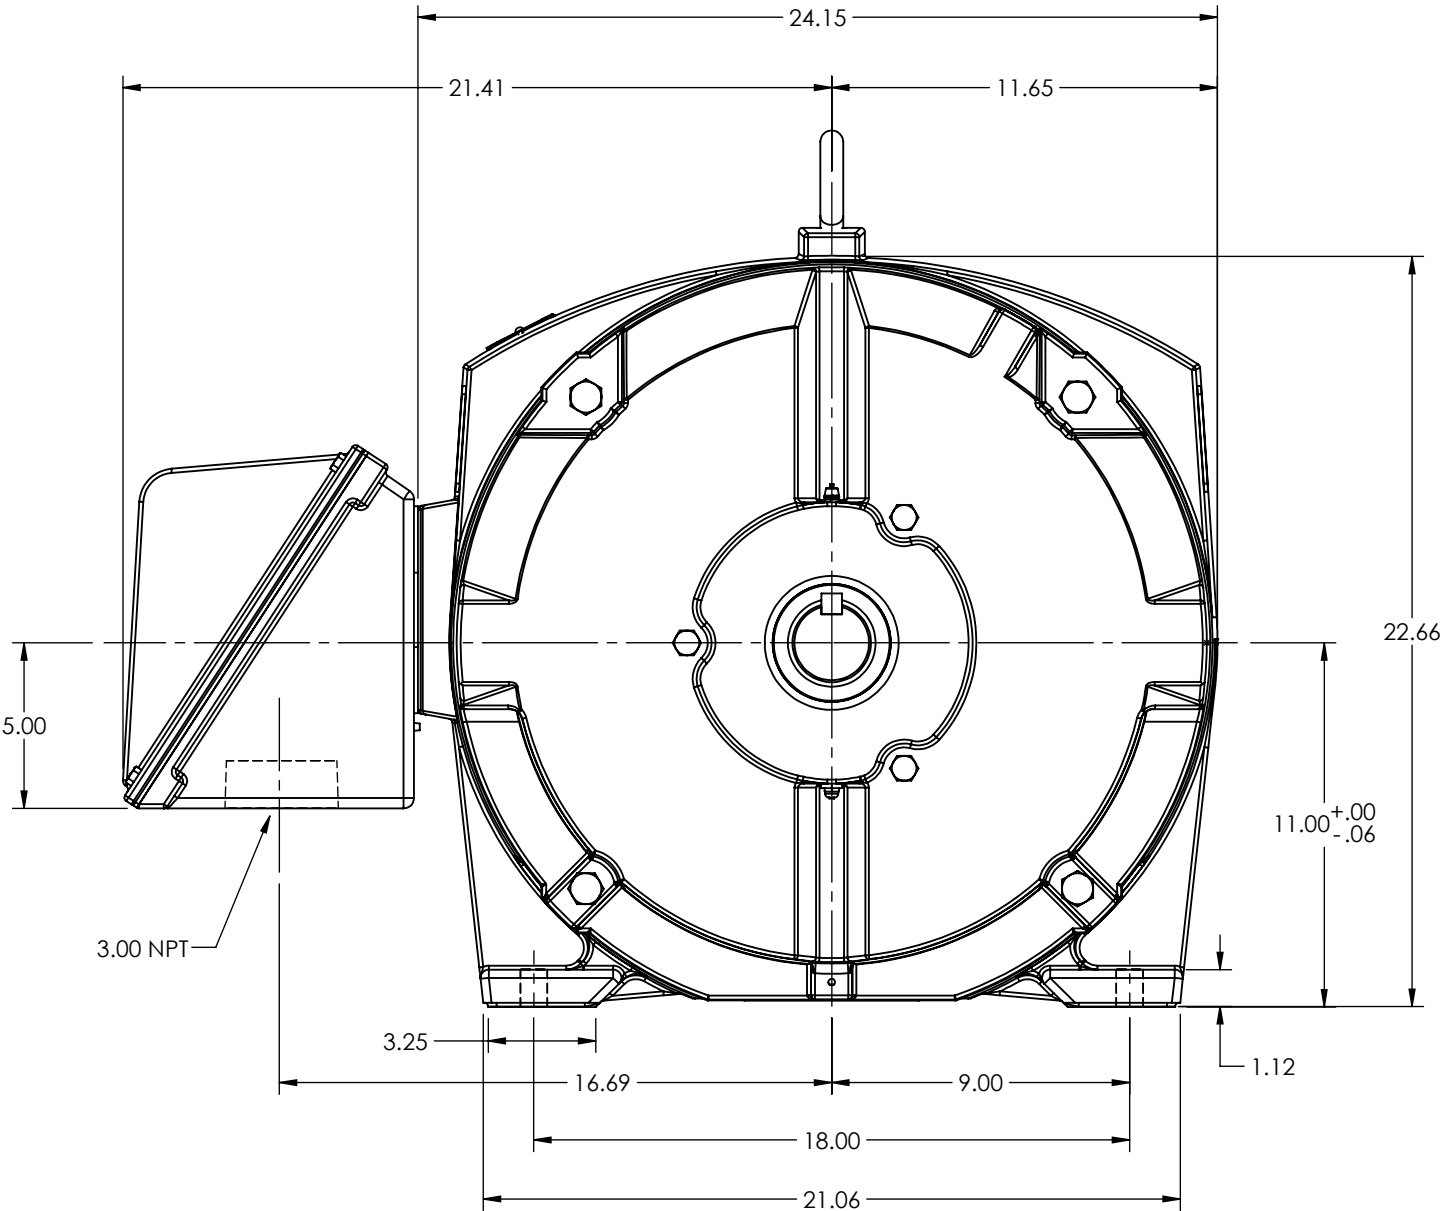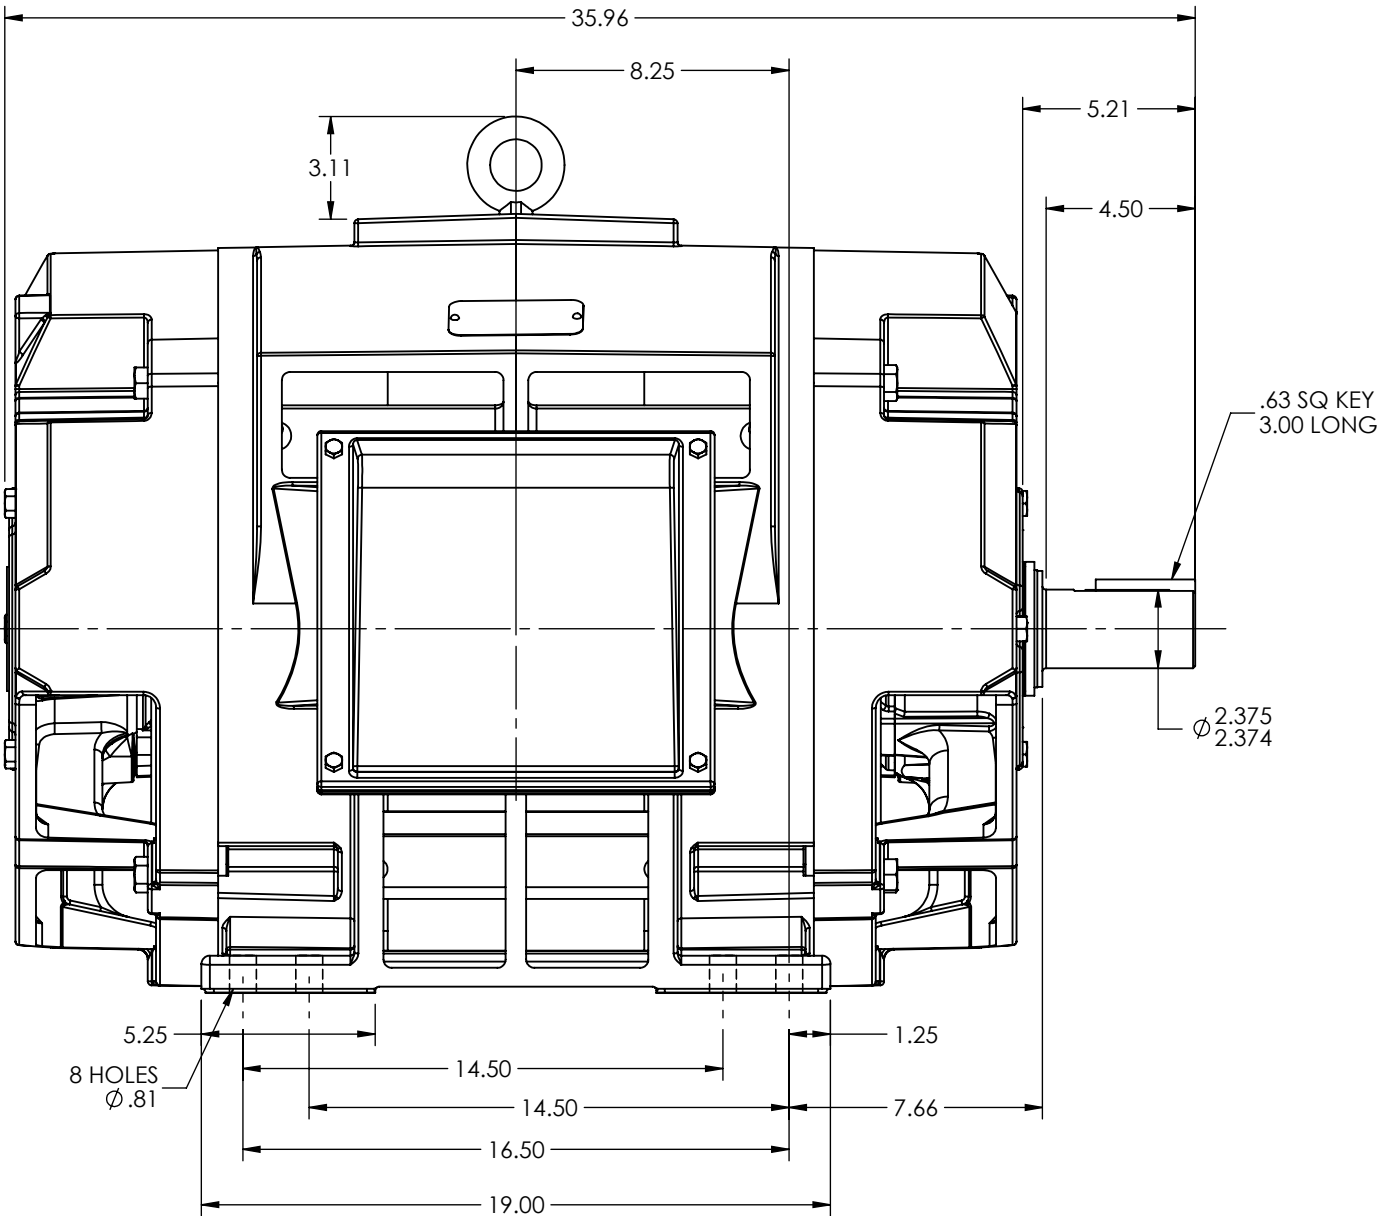

MAXIMUM PERMISSIBLE SHAFT RUNOUT WHEN
MEASURED AT END OF STD. SHAFT EXTENSION IS .002
T.I.R. UP TO AND INCLUDING 1.625 DIA. AND .003 T.I.R.
1.625 DIA. TO 5 INCH DIA.

WEIGHT (LBS): 444TS = 1730
445TS = 1770

MOTOR WEIGHTS MAY VARY BY 15% DEPENDING UPON RATING.

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: UPDATE MODEL TO ADD EXTERNAL HARDWARE PER PROD MGM			
REV: A	VERSION: 01	REVISED: 08:56:13 10/04/2022	TDR: 000001196512
MODEL NO. 617428-041			REF:
BY: ENFRAJ0			B

BALDOR

DIM SHEET HOR 444-445T OPEN

617428-041

D

C

B

A