421948-079

TOLERANCE UNLESS OTHERWISE SHOWN
ONE PLACE DECIMAL ±.1
TWO PLACE DECIMAL ±.02
THREE PLACE DECIMAL ±.003
ANGLE ±0°-30'

SURFACE FINISH 250

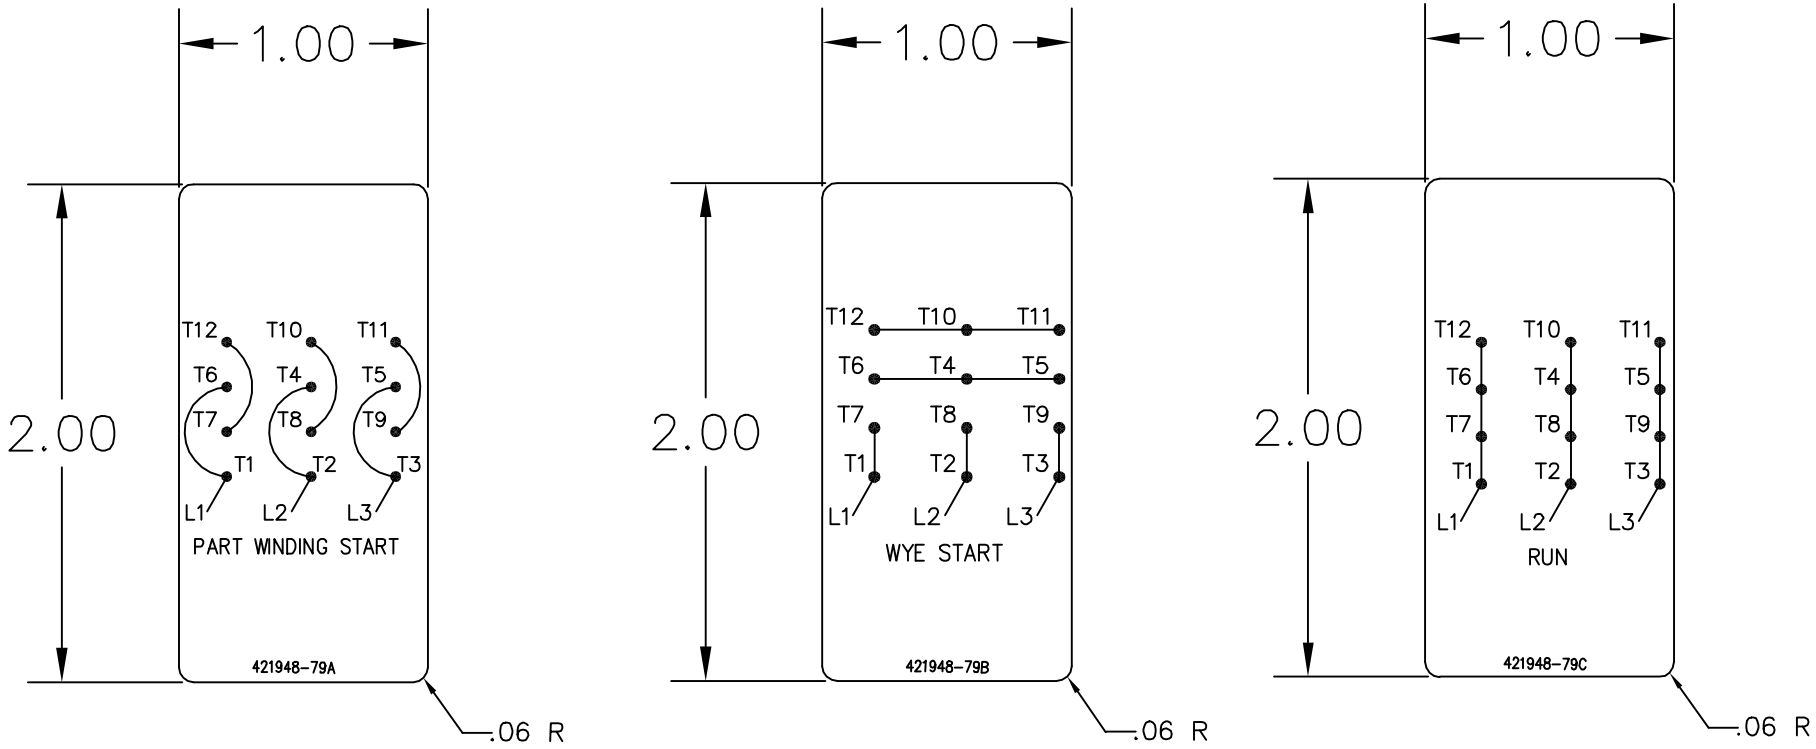


MATERIAL SPECIFICATION: .005 THICK DULL SILVER MYLAR, TOPCOAT-ARMORCOTE, PS ADHESIVE, LABEL MUST MEET THE REQUIREMENTS AS SPECIFIED IN CANADIAN STANDARDS ASSOCIATION: "CSA TESTING LABORATORIES TEST PROGRAM FOR ADHESIVE TYPE NAMEPLATES".

LETTERING: UNIVERSAL TYPE UNLESS OTHERWISE SPECIFIED.

COLORS: 1) BLACK ON NATURAL BACKGROUND

REF: 410961-66A

| | | | |
|---|---|---|---|
| – | 1 | 421948-79C | RUN CONNECTION |
| – | 1 | 421948-79B | WYE START |
| – | 1 | 421948-79A | PART WINDING START |
| – | R | PART | DESCRIPTION |
| GROUP | GROUP | | |

421948-079

| | | |
|---|---|---|
| REV. DESC: UPDATE DRAWING TO REFLECT CORRECT REVISION LETTER | | |
| REV. LTR: C | VERSION: 03 | TDR: 000001225403 |
| FILE: \RAG\00013\521 | REVISED: 09:01:40 02/07/2024 | BY: USBRSPI |
| MTL: – | | |

# BALDOR - RELIANCE®

MYLAR 12 LEAD PWS OR WYE-DELTA WIRING DIAGRAM

SH 1 of 1