


TOLERANCE UNLESS OTHERWISE SHOWN  
 ONE PLACE DECIMAL  $\pm .1$   
 TWO PLACE DECIMAL  $\pm .02$   
 THREE PLACE DECIMAL  $\pm .003$   
 ANGLE  $\pm 0^{\circ}-30'$


SURFACE FINISH

250

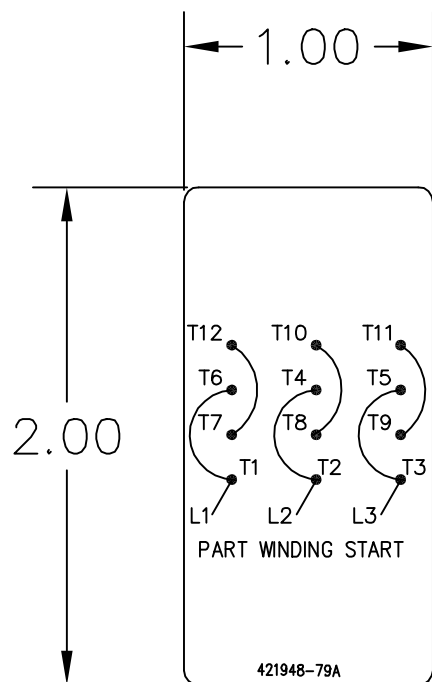


421948-79A

.06 R

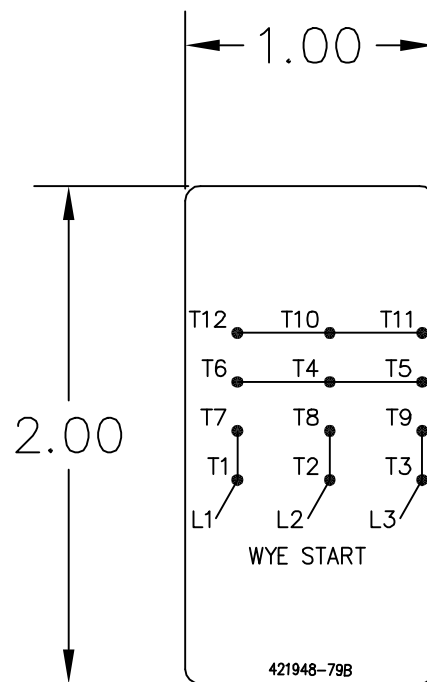

421948-79B

.06 R

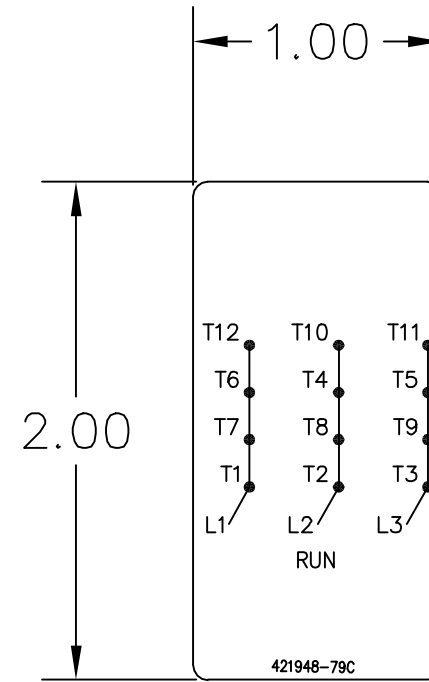

421948-79C

.06 R

MATERIAL SPECIFICATION: .005 THICK DULL SILVER MYLAR,  
 TOPCOAT-ARMORCOTE, PS ADHESIVE, LABEL MUST MEET THE  
 REQUIREMENTS AS SPECIFIED IN CANADIAN STANDARDS  
 ASSOCIATION: "CSA TESTING LABORATORIES TEST PROGRAM  
 FOR ADHESIVE TYPE NAMEPLATES".

LETTERING: UNIVERSAL TYPE UNLESS OTHERWISE SPECIFIED.

COLORS: 1) BLACK ON NATURAL BACKGROUND

REF: 410961-66A

|     |            |                    |
|-----|------------|--------------------|
| - 1 | 421948-79C | RUN CONNECTION     |
| - 1 | 421948-79B | WYE START          |
| - 1 | 421948-79A | PART WINDING START |
| - R | PART       | DESCRIPTION        |

GROUP  
GROUP

421948-079

REV. DESC: UPDATE DRAWING TO REFLECT CORRECT REVISION LETTER

REV. LTR: C

VERSION: 03

TDR: 000001225403

FILE: \RAG\00013\521

REVISED: 09:01:40 02/07/2024

BY: USBRSPI

MTL: -



**BALDOR - RELIANCE®**

MYLAR 12 LEAD PWS OR WYE-DELTA WIRING DIAGRAM

SH 1 of 1