

RPM-AC FINNED FRAME VARIABLE SPEED ALTERNATING CURRENT MOTOR
FL3203Z



COOLING: BLOWER COOLED

ENCLOSURE: TOTALLY ENCLOSED

MOUNTING: FOOT

DRIVE METHOD: COUPLED OR BELTED

ACCESSORIES: PROVISIONS FOR
TACHOMETER MOUNTING
ONLY WHEN SPECIFIED

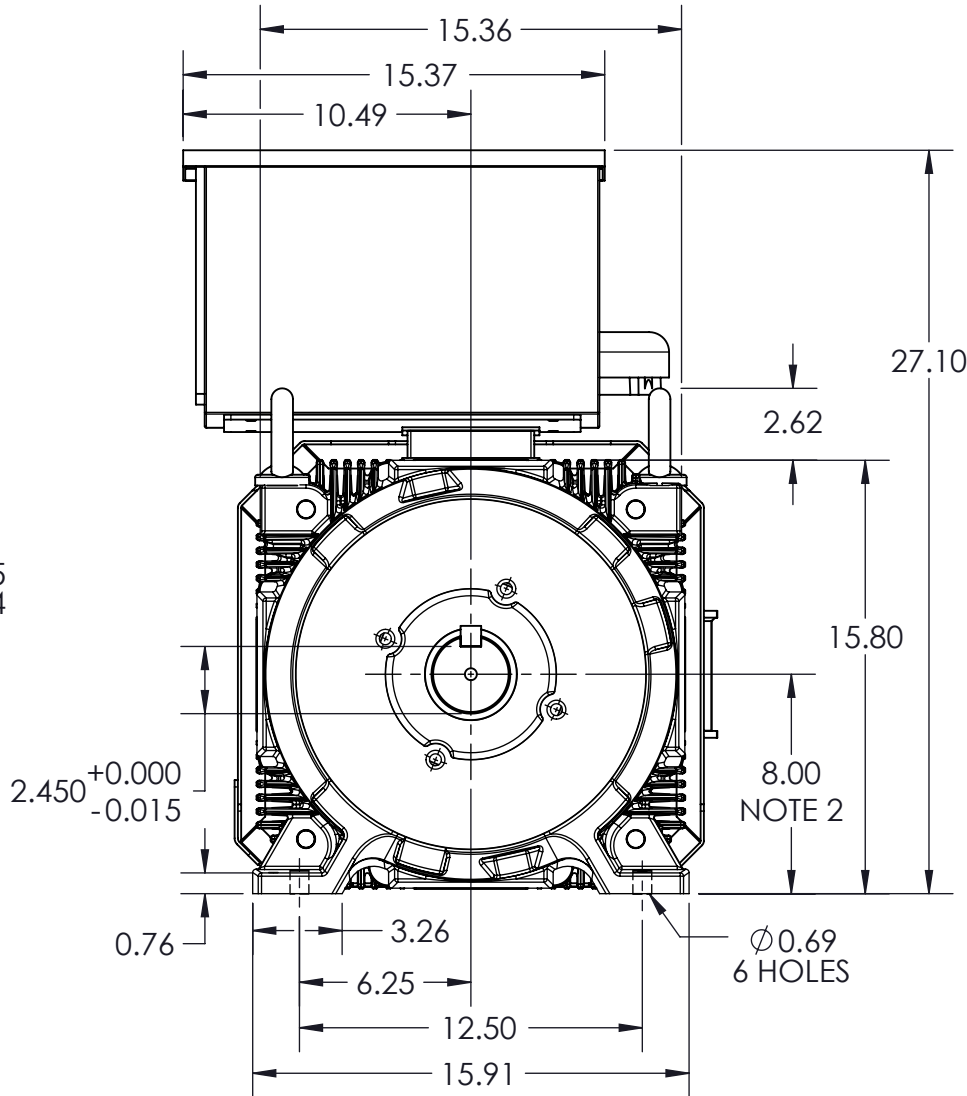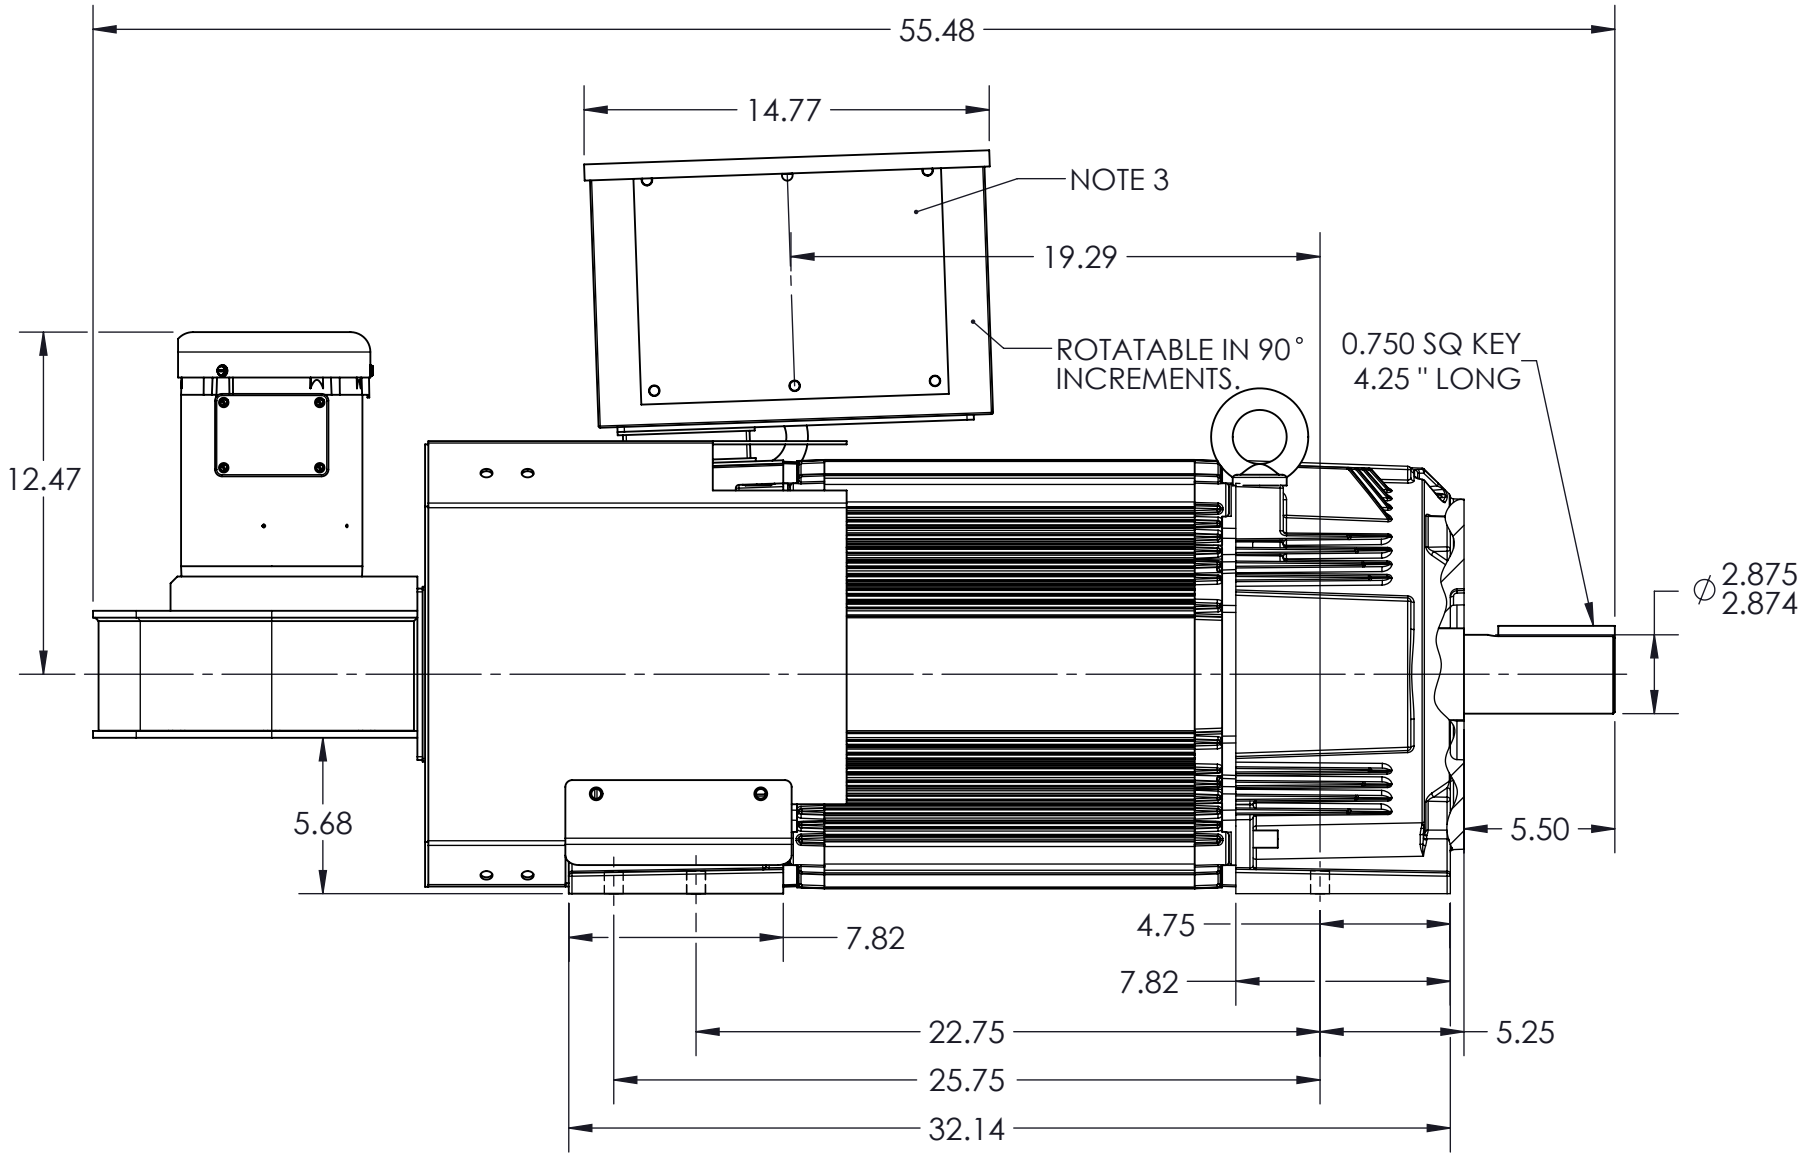

- NOTES:
- O.D.E. C-FACE & TACHOMETER MOUNTING. 1/2-13 TAP, 1.00 DEEP, ON A $\phi 7.25$ B.C. FACE RUNOUT AND ECCENTRICITY 0.004 MAX. T.I.R.
 - SHAFT HEIGHT WILL NOT BE EXCEEDED. SHIMS UP TO 0.06 INCHES IN THICKNESS ARE USUALLY REQUIRED FOR COUPLED OR GEARED MACHINES.
 - REMOVABLE COVER PLATE FOR CUSTOMER DRILLING.

- TERMINAL BOX MAY BE LOCATED F1, F2, OR F3 IF SPECIFIED.
- REFER TO 616779-55 FOR SPECIFIED TACHOMETER DIMENSIONS.

DIMENSIONS ARE IN INCHES
MOTOR WEIGHT: 1400 LBS. (MAY VARY 15%
FOR NON-STANDARD RATINGS AND / OR
ACCESSORIES.)

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: INITIAL RELEASE			
REV: -	VERSION: 00	REVISED: 11:17:03 12/17/2014	TDR: 000000860207
MODEL NO. 619689-001			REF: -
BY: MGH TLC			

BALDOR

DIM SHEET, FL3203Z, RPM-AC, TEBC

619689-001

619689-001