


RPM-AC FINNED FRAME VARIABLE SPEED ALTERNATING CURRENT MOTOR
FL5830-TEBC

COOLING: BLOWER COOLED

ENCLOSURE: TOTALLY ENCLOSED

MOUNTING: F3, FOOT MOUNT

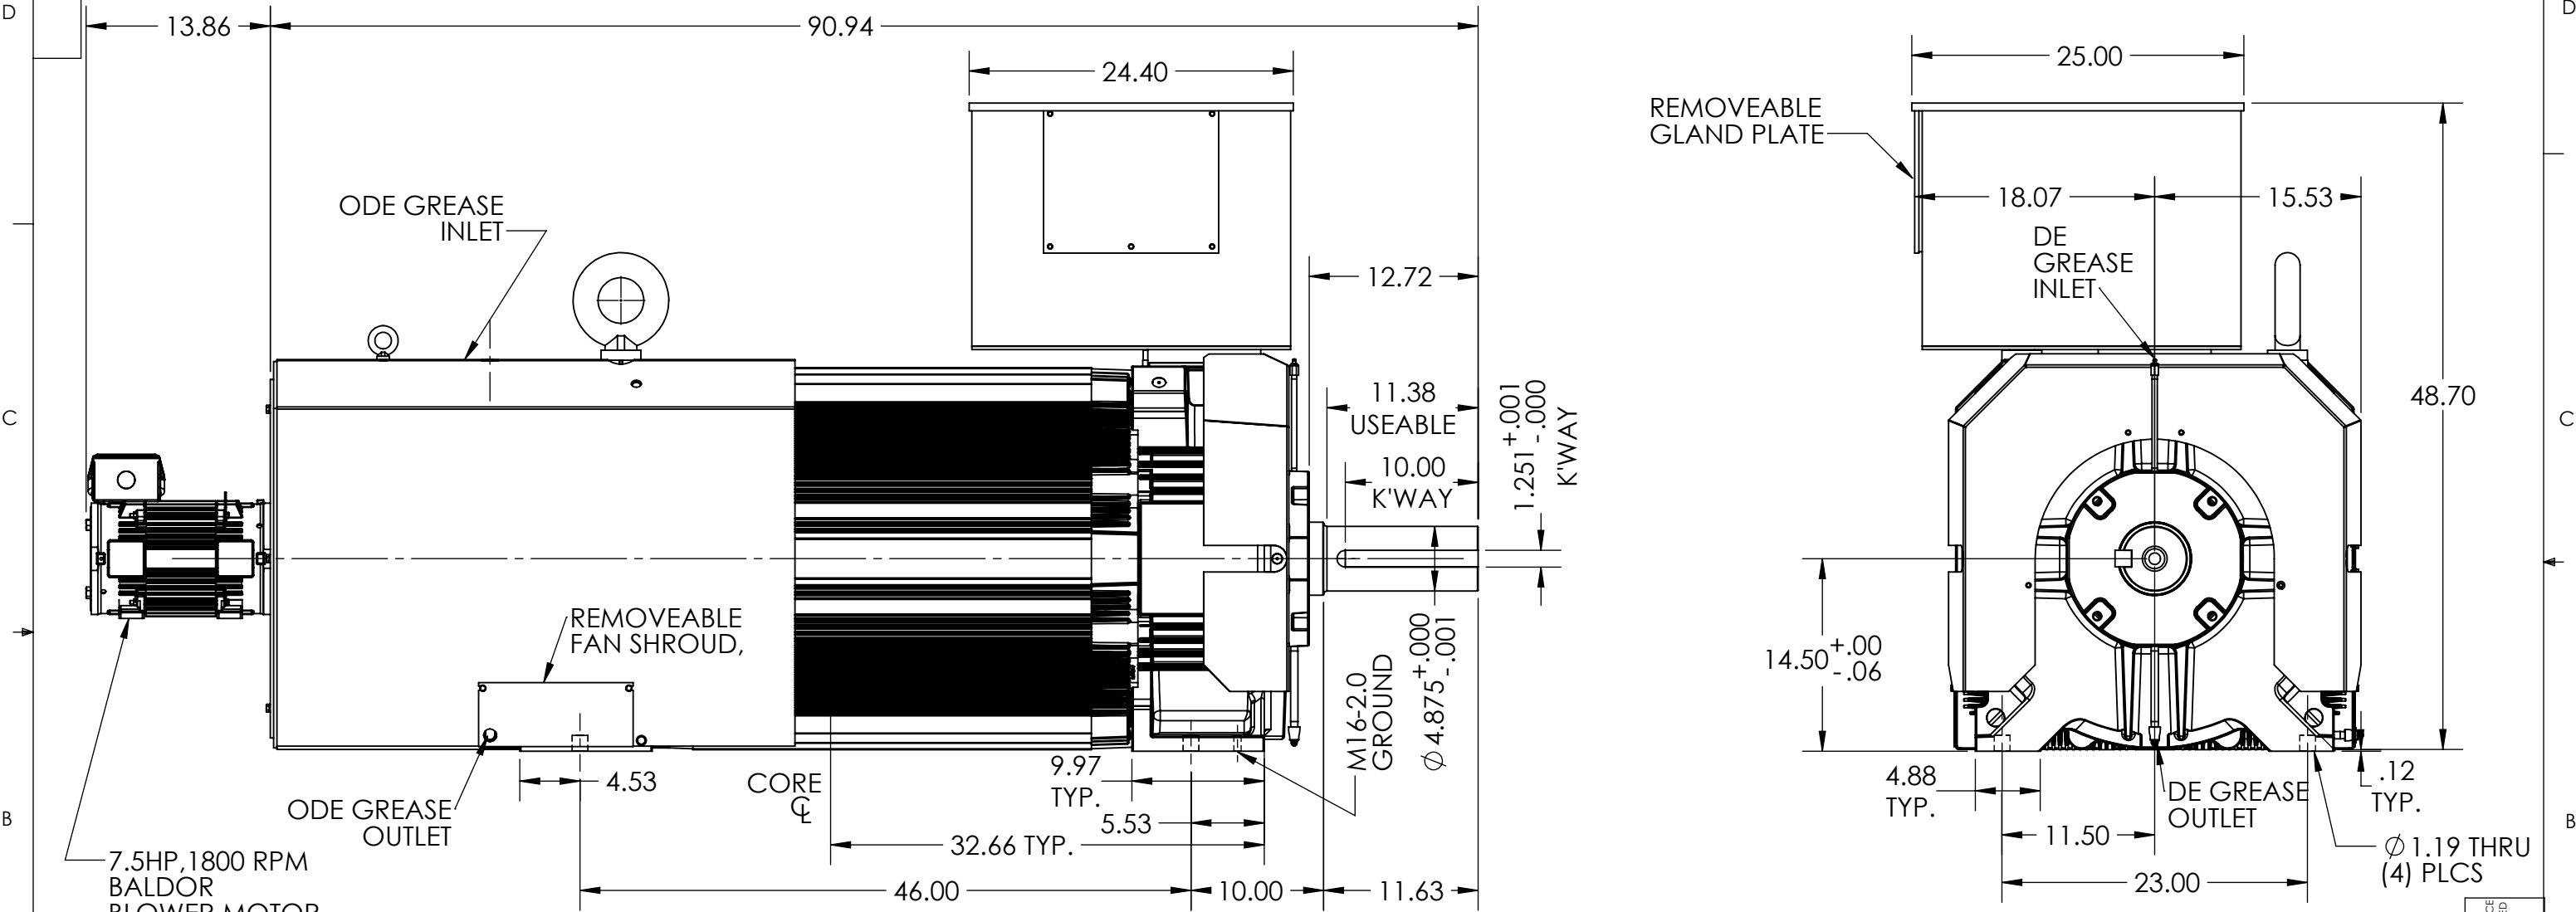

- NOTES:
1. MOTOR WEIGHTS MAY VARY +/- 15%
 2. SHAFT RUNOUT 0.003 T.I.R. MAX
 3. SHAFT HEIGHT WILL NOT BE EXCEEDED
SHIMS UP TO 0.060 INCHES IN THICKNESS ARE TYPICALLY REQUIRED FOR COUPLED OR GEARED MACHINES
 4. DIMENSIONS ARE IN INCHES
 5. TERMINAL BOX CAN BE LOCATED F1 OR F2 IF SPECIFIED
 6. FOR COUPLED DUTY ONLY

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

FL5830	8210
FRAME SIZE	WT (LBS)

REV. DESC: INITIAL RELEASE			
REV: -	VERSION: 00	REVISED: 08:05:11 07/29/2021	TDR: 000001172662
MODEL NO. 619718-003			REF: -
BY: USWATUR			B

BALDOR - RELIANCE®

DIM SHEET,FL5830-TEBC,FOOT MNT MOTOR,F3, 24X24X18 BOX

BALDOR-RELIANCE PROPRIETARY & CONFIDENTIAL:
THIS DRAWING IS THE PROPERTY OF BALDOR-RELIANCE
AND IS NOT TO BE REPRODUCED, COPIED, OR
DISCLOSED WITHOUT THE EXPRESS WRITTEN PERMISSION
OF THE COMPANY.

619718-003