
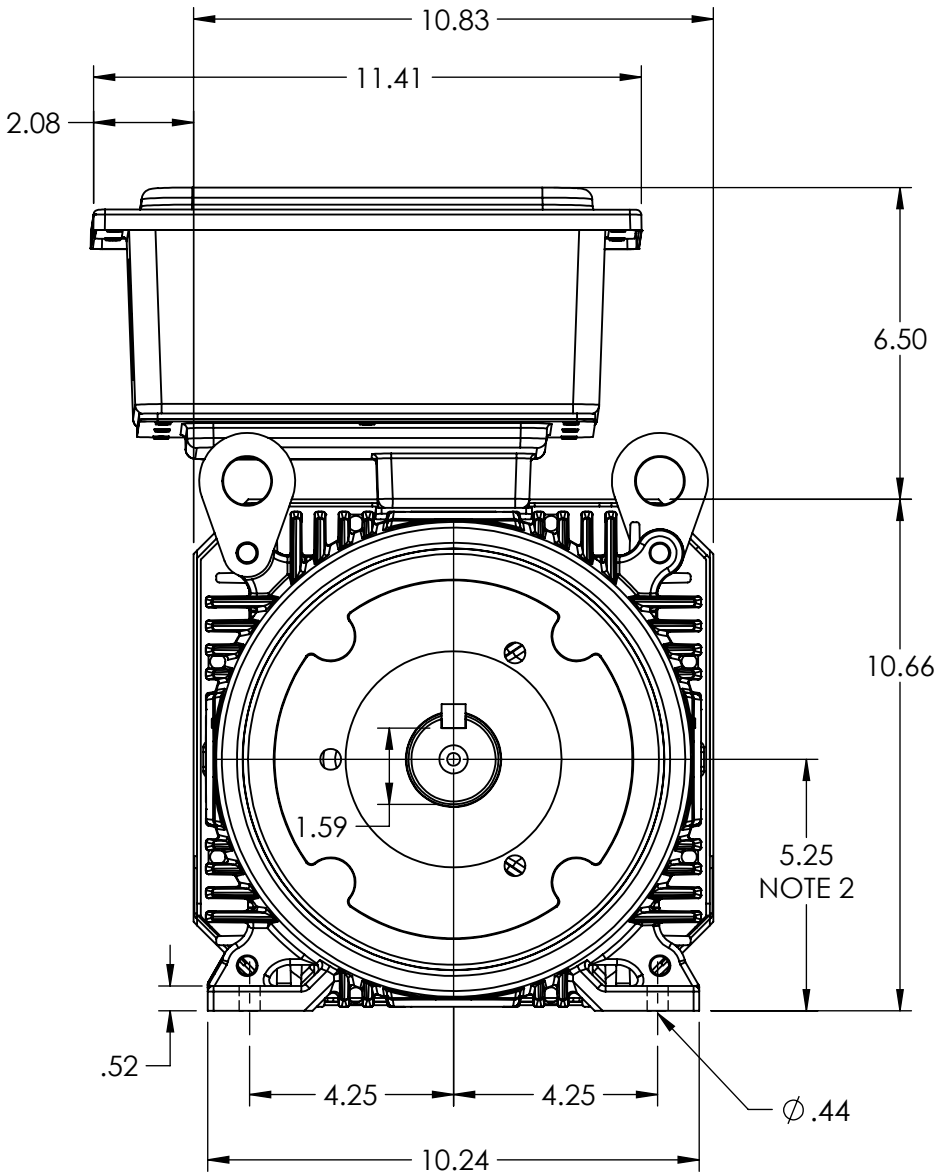


RPM-AC FINNED FRAME VARIABLE SPEED ALTERNATING
CURRENT MOTOR
FL2162Z

COOLING: FAN COOLED

ACCESSORIES: PROVISIONS FOR
TACHOMETER MOUNTING
ONLY WHEN SPECIFIED

ENCLOSURE: TOTALLY ENCLOSED
MOUNTING: FOOT
DRIVE METHOD: COUPLED OR BELTED

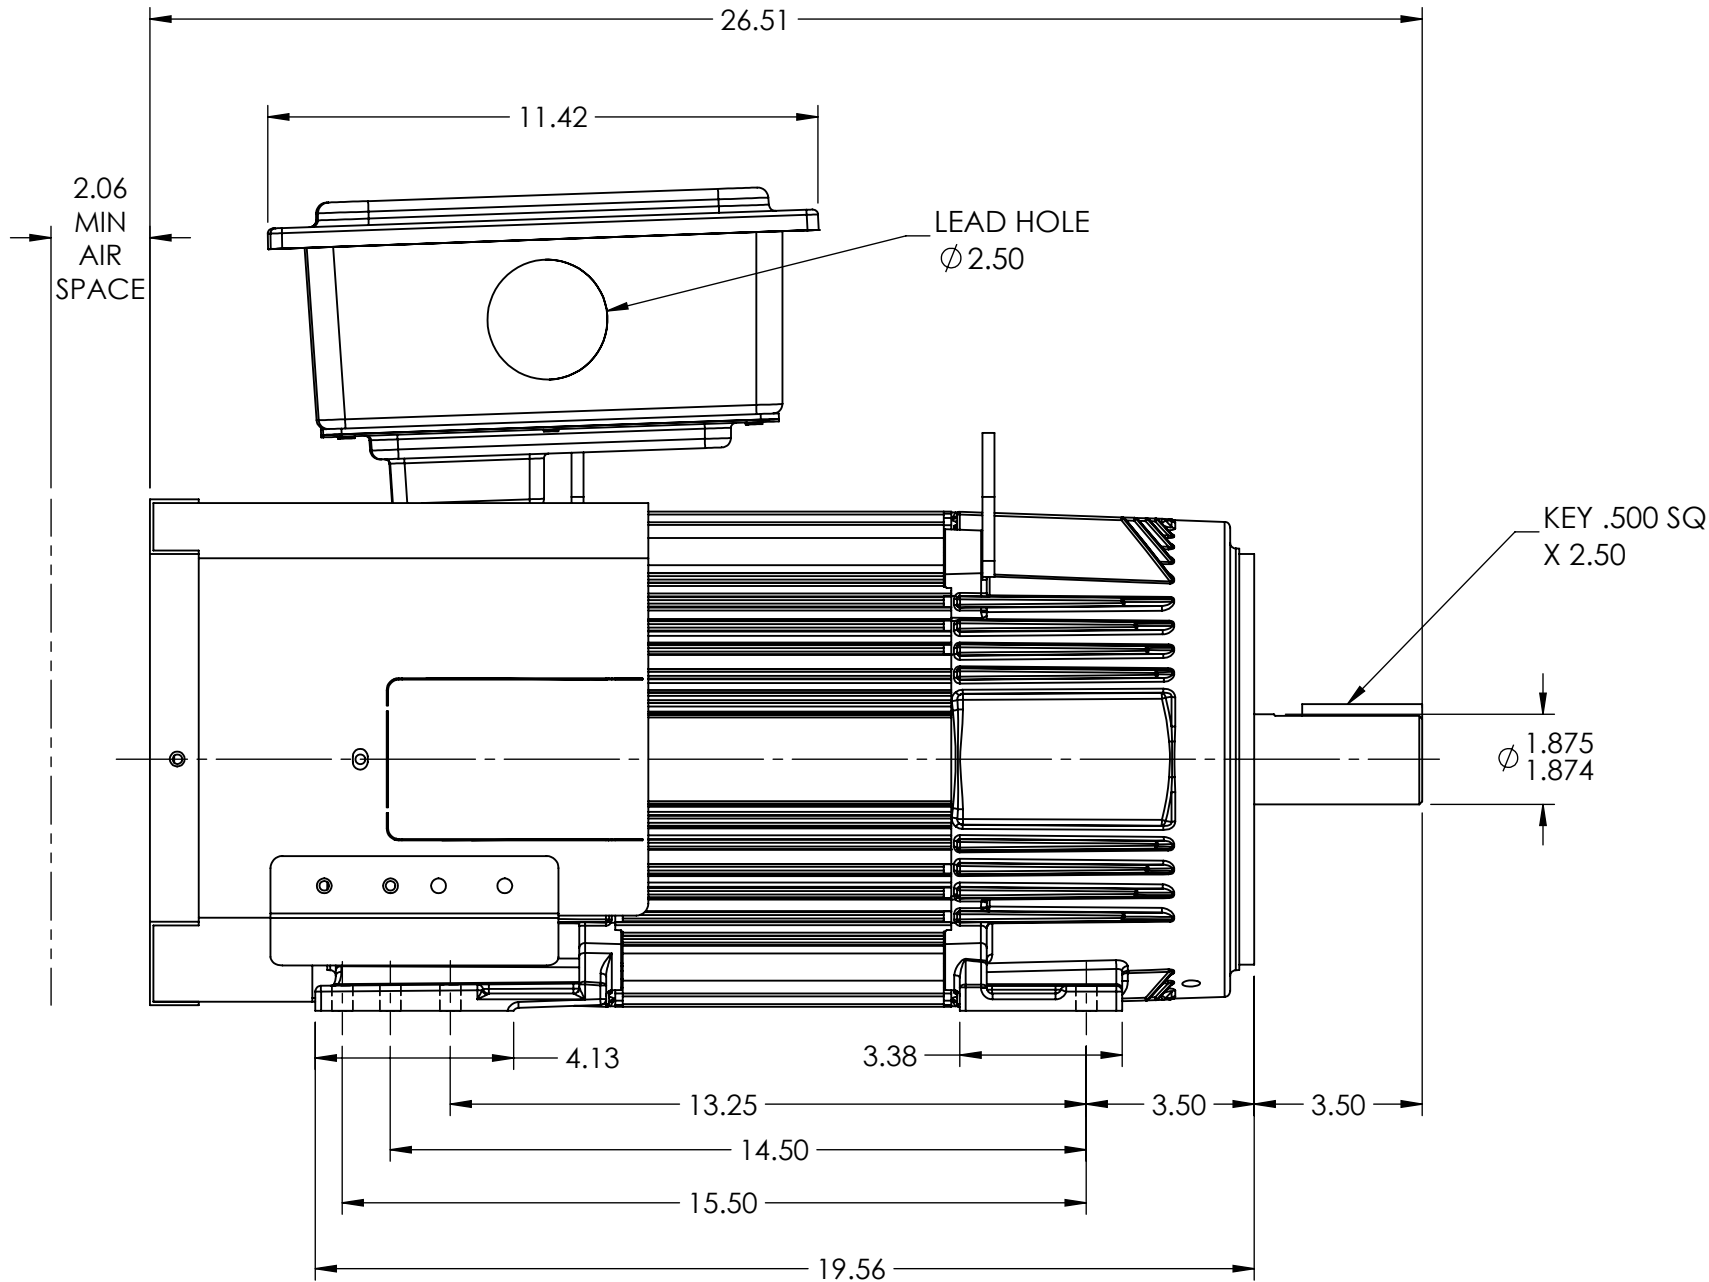

MOTOR WEIGHT: 290 LBS. (MAY VARY 15%)
DIMENSIONS ARE IN INCHES SCALE: 1.00

235 AMP TERMINAL BOX SHOWN
ROTATABLE IN 90° INCREMENTS

NOTE 1 O.D.E. C-FACE & TACHOMETER MOUNTING
1/2-13 TAP, .88 IN. DEEP, ON A Ø 7.25 IN. BOLT CIRCLE
FACE RUNOUT AND ECCENTRICITY .004 MAX T.I.R.

NOTE 2 SHAFT HEIGHT WILL NOT BE EXCEEDED.
SHIMS UP TO .05mm IN THICKNESS ARE USUALLY
REQUIRED FOR COUPLED OR GEARED MACHINES.

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: MODEL AND REDRAW IN SOLIDWORKS			
REV: A	VERSION: 01	REVISED: 08:33:03 02/01/2023	TDR: 000001202962
MODEL NO. 617517-073		REF: -	
BY: USWATUR			B

BALDOR - RELIANCE®

DIM SHT RPMAC TEFC FL2162Z FT MT PROV FOR TACH F3 MILL BOX

617517-073

617517-073