


RPMAC VARIABLE SPEED ALTERNATING CURRENT MOTOR RL2898Z/URL2898

ENCLOSURE: DRIP PROOF
MOUNTING: FOOT
DRIVE METHOD: COUPLED OR BELTED

COOLING: FORCE VENTILATED
ACCESSORIES: PROVISIONS FOR
TACHOMETER MOUNTING
ONLY WHEN SPECIFIED

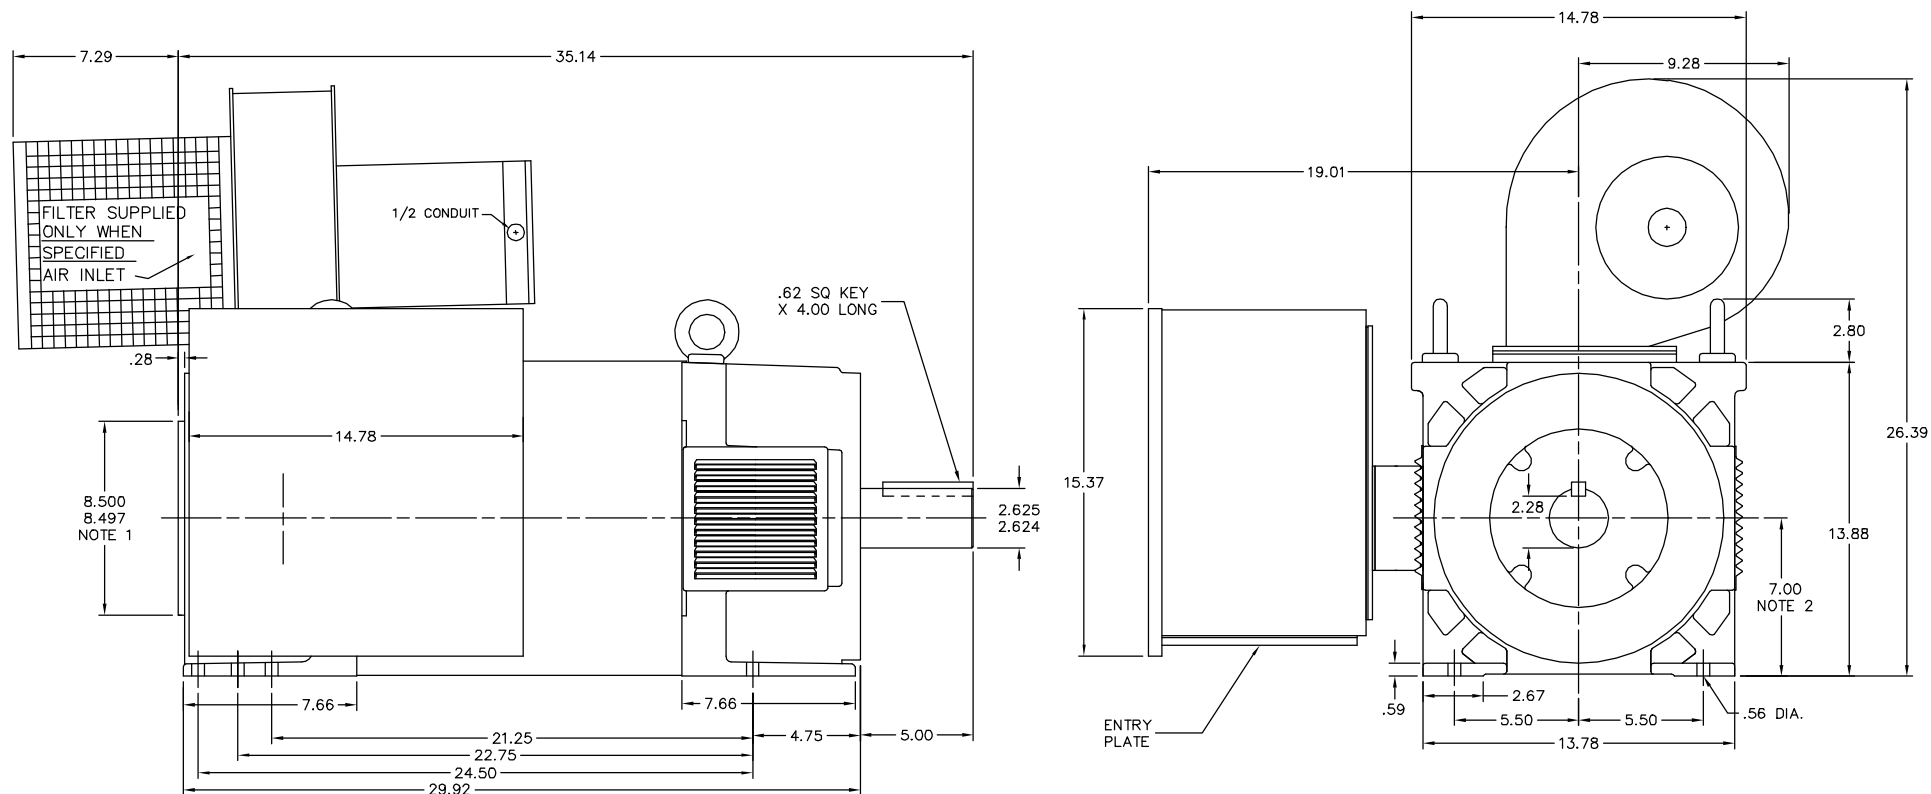

590 AMP MILL TERMINAL BOX SHOWN
ROTATABLE IN 90° INCREMENTS

DIMENSIONS ARE IN INCHES SCALE 1:1

MOTOR WEIGHT 930 LBS. (MAY VARY 15%)

NOTE 1 TACHOMETER MOUNTING
1/2-13 TAP, .88 DEEP, ON A 7.25 DIA. BOLT CIRCLE
FACE RUNOUT AND ECCENTRICITY .004 MAX. T.I.R.

NOTE 2 SHAFT HEIGHT WILL NOT BE EXCEEDED.
SHIMS UP TO .03 INCHES IN THICKNESS ARE USUALLY
REQUIRED FOR COUPLED OR GEARED MACHINES.

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: ADD SPACER TO C/BOX		
REV. LTR: B	VERSION: 02	TDR: 000001198337
FILE: \RG6\00031\907	REVISED: 10:56:34 10/10/2022	BY: RGGRWM
MTL: -		

BALDOR - RELIANCE®

DIM SHT, RL2898Z, DPFV, PROV FOR TACH, FT MTG, F1 MILL BOX

SH 1 of 1