

RPM-AC FINNED FRAME VARIABLE SPEED ALTERNATING CURRENT MOTOR
RL & URL3203Z



COOLING: FORCE VENTILATED

ENCLOSURE: DRIP PROOF

MOUNTING: FOOT

DRIVE METHOD: COUPLED OR BELTED

ACCESSORIES: PROVISIONS FOR
TACHOMETER MOUNTING
ONLY WHEN SPECIFIED

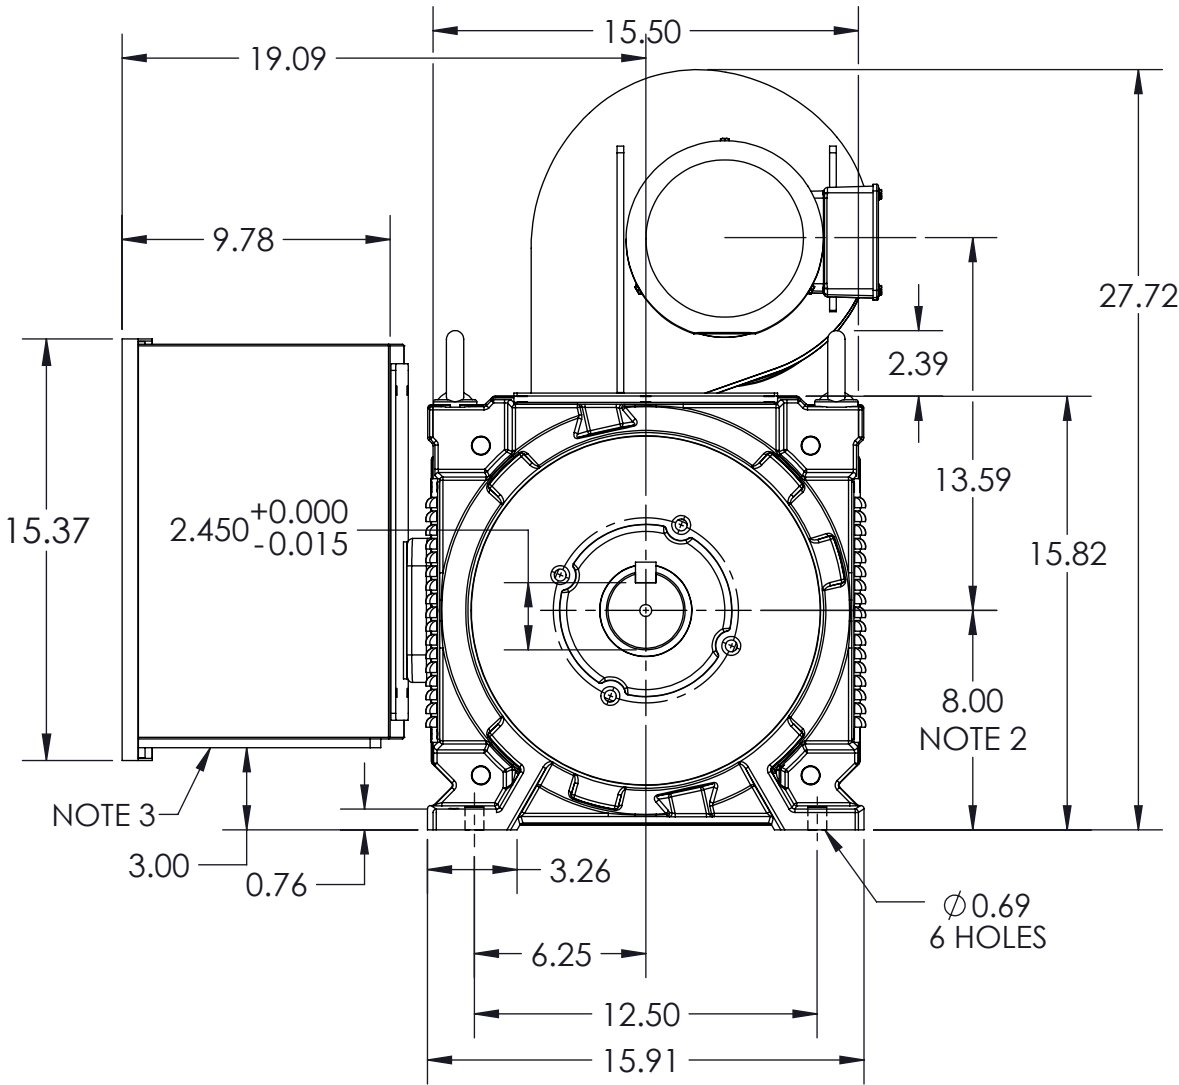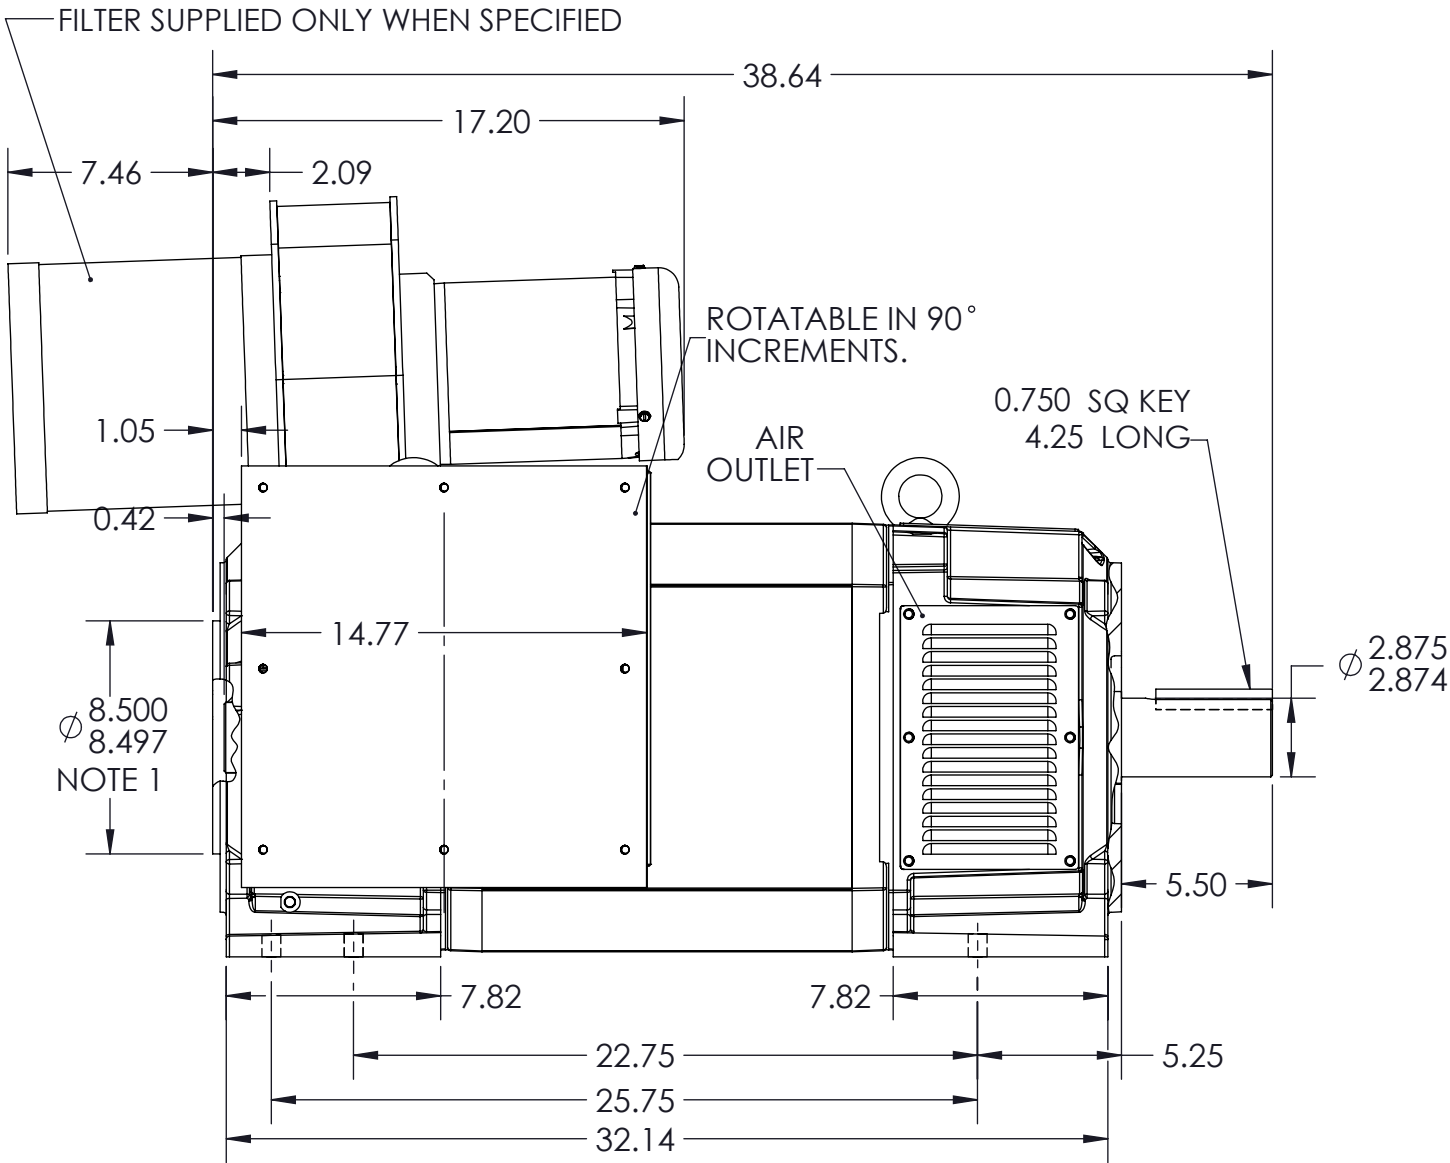

- NOTE S:
- O.D.E. C-FACE & TACHOMETER MOUNTING. 1/2-13 TAP, 1.00 DEEP, ON A $\phi 7.25$ B.C. FACE RUNOUT AND ECCENTRICITY 0.004 MAX. T.I.R.
 - SHAFT HEIGHT WILL NOT BE EXCEEDED. SHIMS UP TO 0.06 INCHES IN THICKNESS ARE USUALLY REQUIRED FOR COUPLED OR GEARED MACHINES.
 - REMOVABLE COVER PLATE FOR CUSTOMER DRILLING.

- TERMINAL BOX MAY BE LOCATED F1, F2 OR F3, IF SPECIFIED.
- REFER TO 616779-51 FOR SPECIFIED TACHOMETER DIMENSIONS.
- BLOWER ASSEMBLY CAN BE LOCATED F1, F2, OR F3, IF SPEC'D.
- BLOWER ASSEMBLY AND TERMINAL BOX CANNOT BE LOCATED AT THE SAME POSITION.

DIMENSIONS ARE IN INCHES
MOTOR WEIGHT: 1320 LBS. (MAY VARY 15%
FOR NON-STANDARD RATINGS AND / OR
ACCESSORIES.)

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: ADD "URL" TO FRAME SIZE			
REV: C	VERSION: 03	REVISED: 01:47:22 04/06/2016	TDR: 000000973515
MODEL NO. 619691-001		REF: -	
BY: RGGWT		B	

BALDOR

DIM SHT,RL & URL3203Z,FOOTED,RPM-AC,DP FV

619691-001

619691-001