# RPM-AC VARIABLE SPEED ALTERNATING CURRENT MOTOR
# RL4451Z


617601-001


ENCLOSURE: DRIP PROOF

MOUNTING: FOOT

COOLING: FORCE VENTILATED

ACCESSORIES: PROVISIONS FOR TACHOMETER MOUNTING ONLY WHEN SPECIFIED

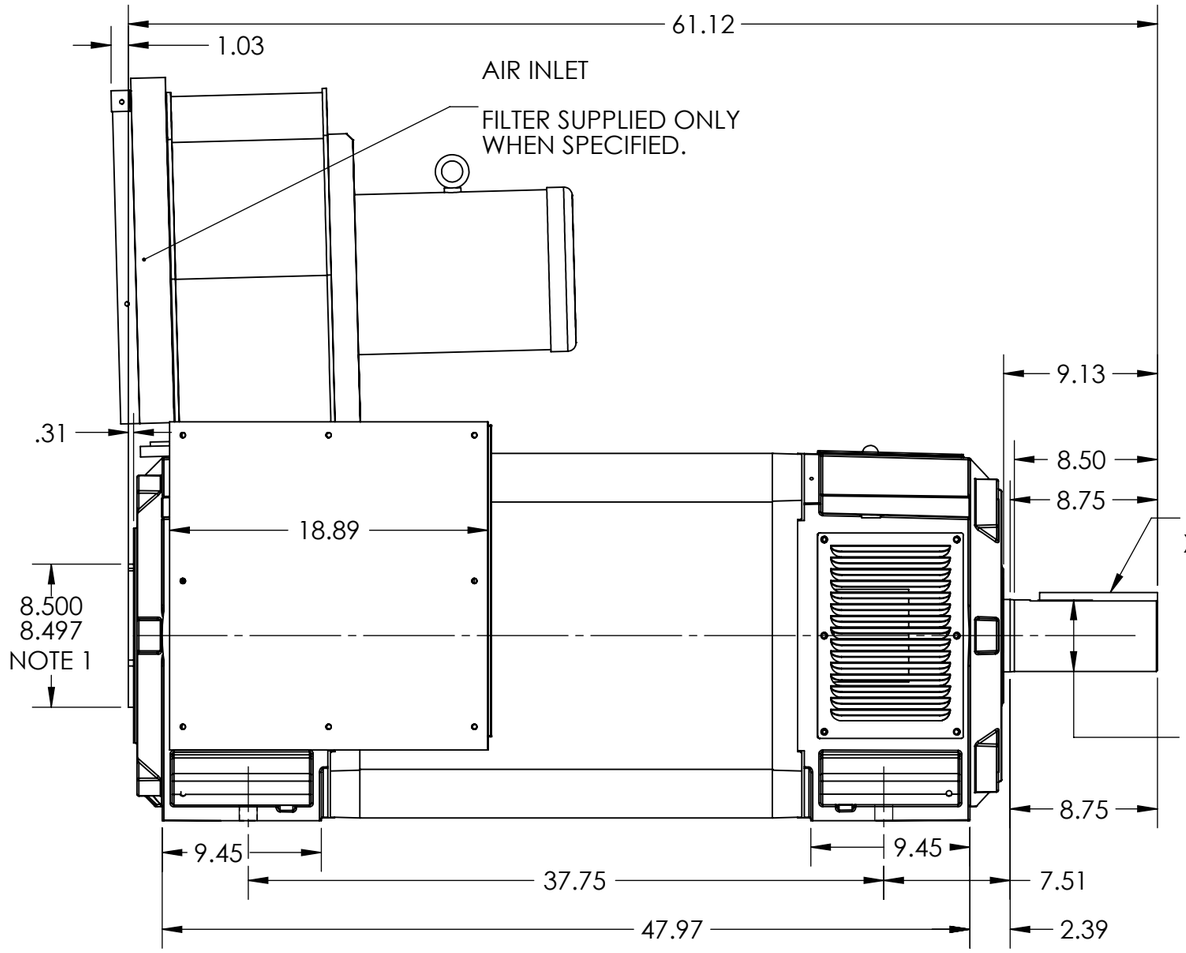

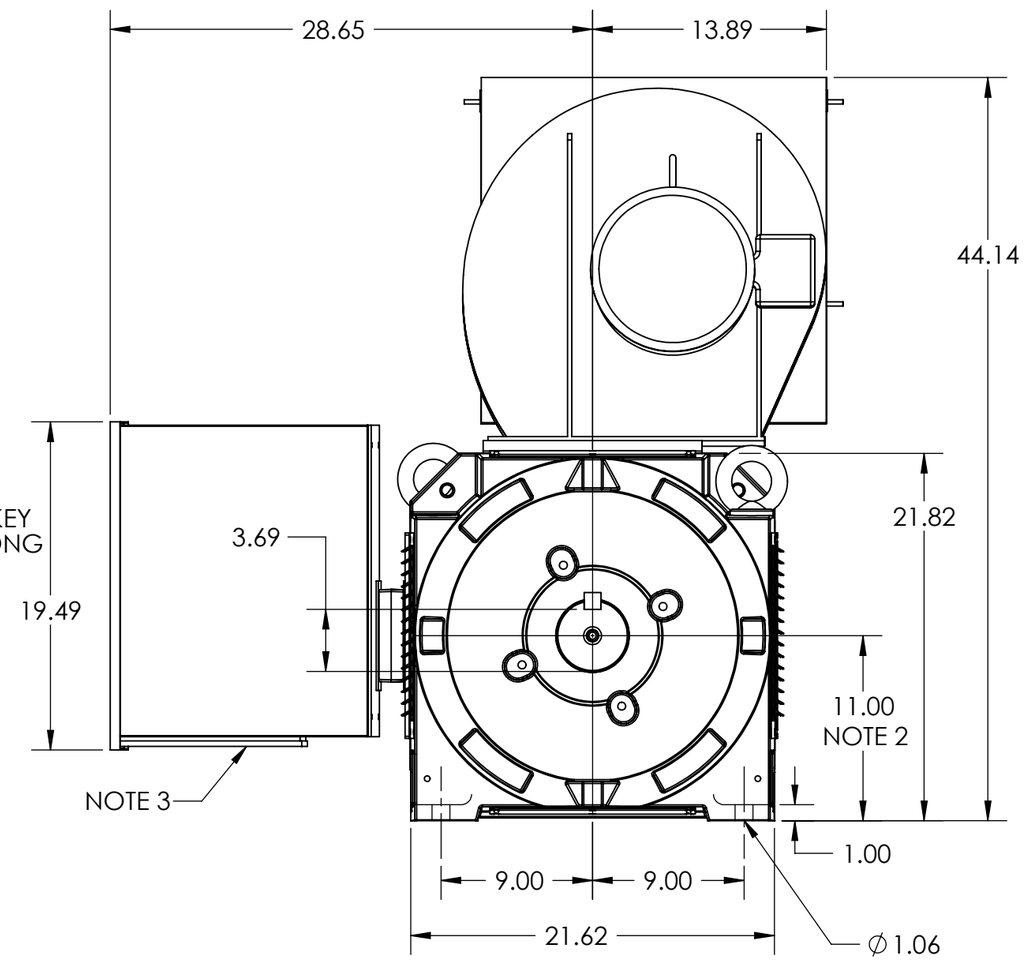
NOTE 1: O.D.E. C-FACE & TACHOMETER MOUNTING
1/2-13 TAP, 1.00 DEEP, ON A ∅7.25 B.C.
FACE RUNOUT AND ECCENTRICITY 0.004 MAX. T.I.R.

NOTE 2: SHAFT HEIGHT WILL NOT BE EXCEEDED
SHIMS UP TO 0.06 INCHES IN THICKNESS ARE USUALLY REQUIRED FOR COUPLED OR GEARED MACHINES

NOTE 3: REMOVEABLE COVER PLATE FOR CUSTOMER DRILLING

NOTE 4: TERMINAL BOX CAN BE LOCATED F1 OR F2 IF SPECIFIED.

MOTOR WEIGHT: 3635 LBS.
MAY VARY 15% FOR NON-STANDARD RATINGS AND/OR ACCESSORIES.

REFER TO 616779-55 FOR SPECIFIED TACHOMETER DIMENSIONS

IF MOUNTING DETAILS ARE REQUIRED, CONSULT FACTORY.

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

| | | | |
|---|---|---|---|
| REV. DESC: ADD MISSING DIMENSION TO D.E. (2.39) | | | |
| REV: E | VERSION: 05 | REVISED: 07:36:09 05/04/2023 | TDR: 000001208472 |
| MODEL NO. 617601-001 | | | REF: - |
| BY: USWATUR | | | B |

BALDOR - RELIANCE®

DIM SHT, RL4451Z ,DPFV, STD

617601-001