
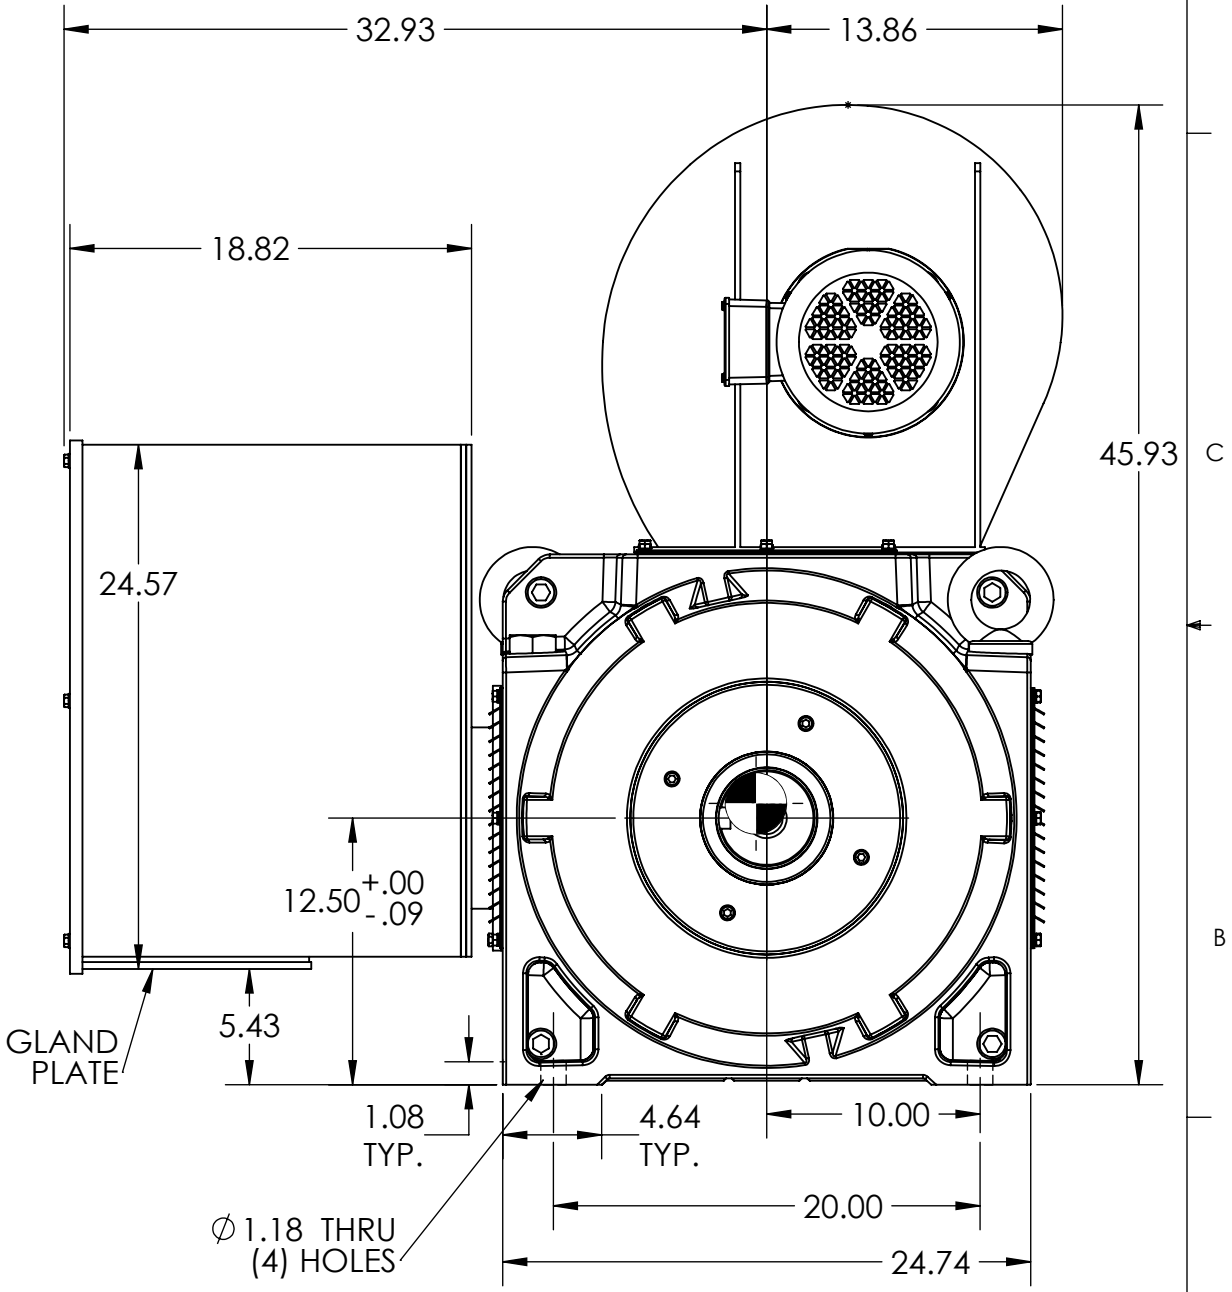


RPM-AC VARIABLE SPEED ALTERNATING CURRENT MOTOR
RL5020-DPFV

ENCLOSURE: OPEN DRIP PROOF
MOUNTING: F1, FOOT MOUNT

COOLING: FORCE-VENTILATED

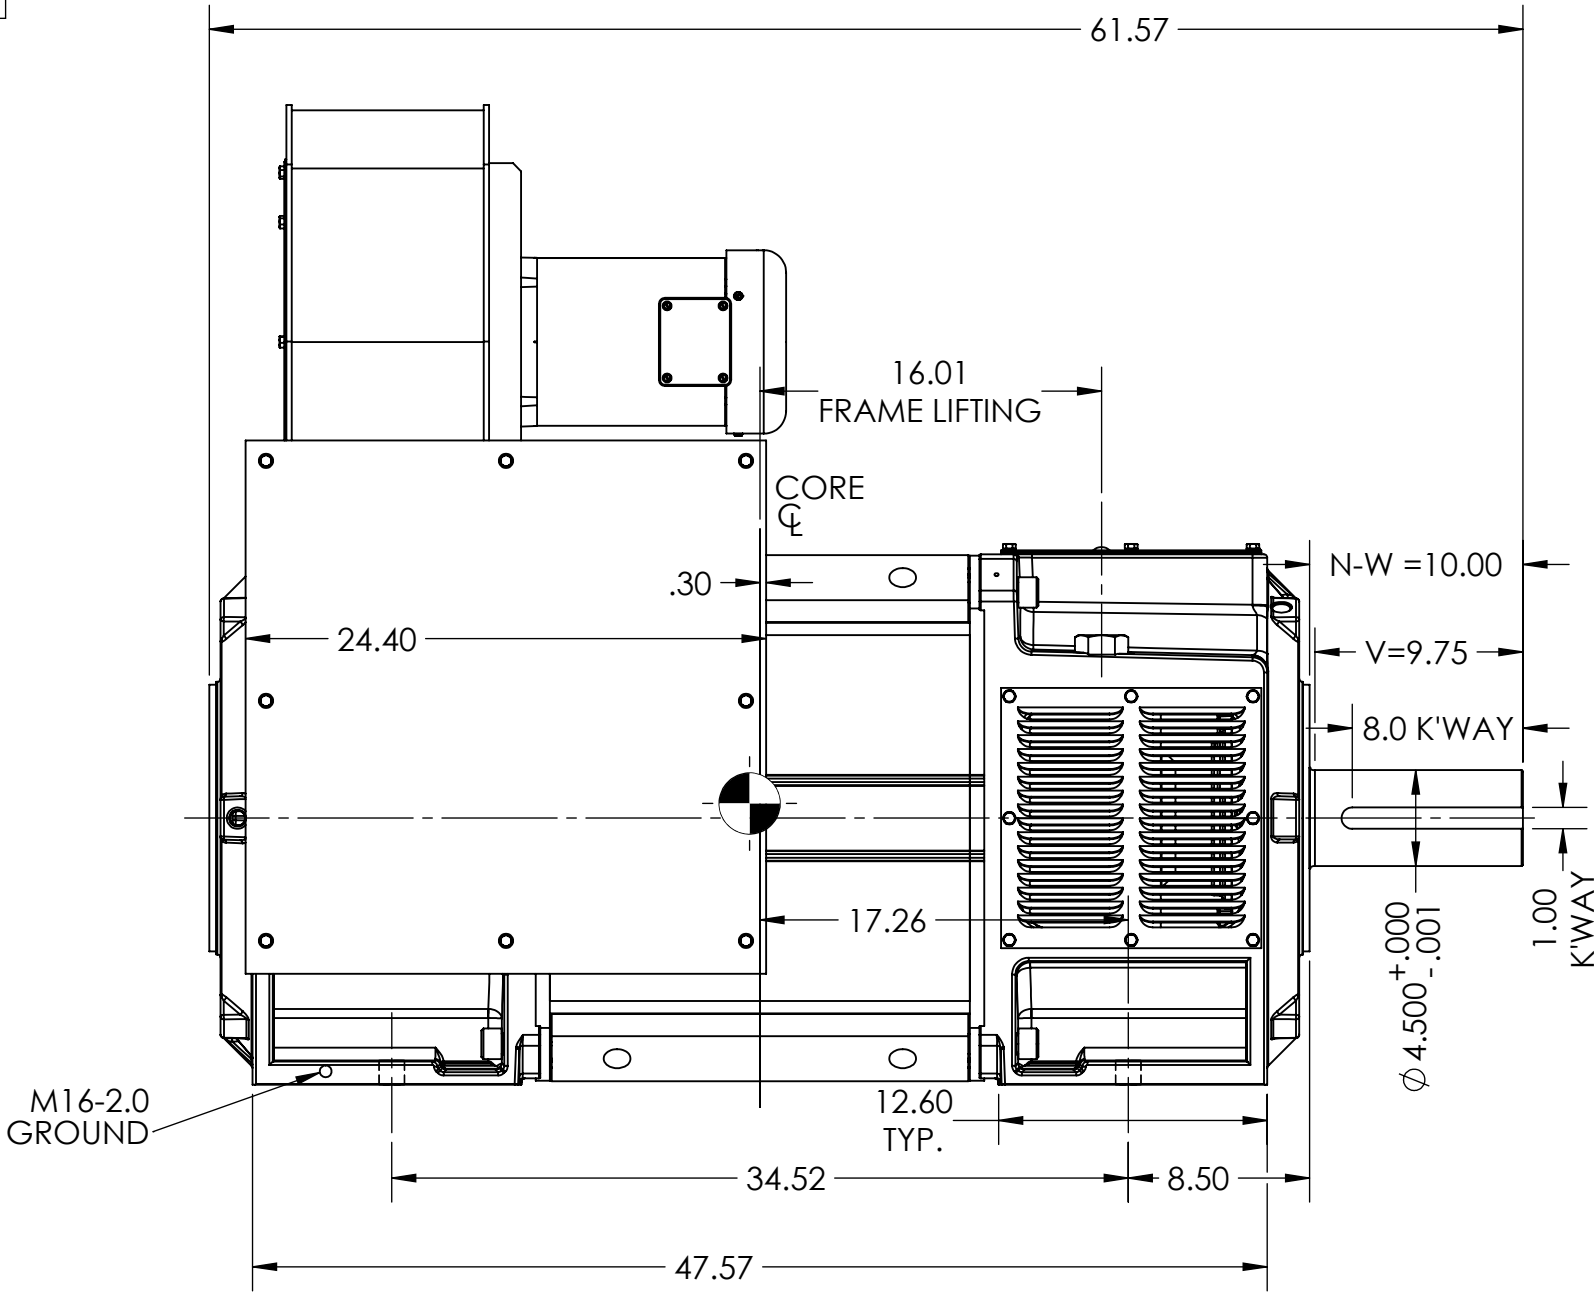

- NOTES:
1. MOTOR WEIGHTS MAY VARY +/- 15%
 2. SHAFT RUNOUT 0.003 T.I.R. MAX
 3. DIMENSIONS ARE IN INCHES

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

RL5020	4350
FRAME SIZE	WT (LBS)

BALDOR-DODGE-RELIANCE PROPRIETARY & CONFIDENTIAL:
THIS DRAWING IS THE PROPERTY OF BALDOR-DODGE-RELIANCE
AND/OR ITS SUBSIDIARIES AND IS NOT TO BE USED, DUPLICATED
OR DISCLOSED WITHOUT THE EXPRESS WRITTEN PERMISSION
OF THE COMPANY.

REV. DESC: CORRECT SHAFT V DIMENSION TO 9.75			
REV: A	VERSION: 01	REVISED: 09:15:54 01/27/2022	TDR: 000001185048
MODEL NO. 622011-001			REF: -
BY: USANBRO28			B

BALDOR - RELIANCE®

DIM SHEET, RL5020,FT. MNT, F1 CBOX,F3 BLOWER,4,500 SHAFT EXT

622011-001