


RPM-AC VARIABLE SPEED ALTERNATING CURRENT MOTOR
RL5832-DPFV

ENCLOSURE: OPEN DRIP PROOF
MOUNTING: F1, FOOT MOUNT

COOLING: FORCE-VENTILATED
OVERSIZED CONDUIT BOX

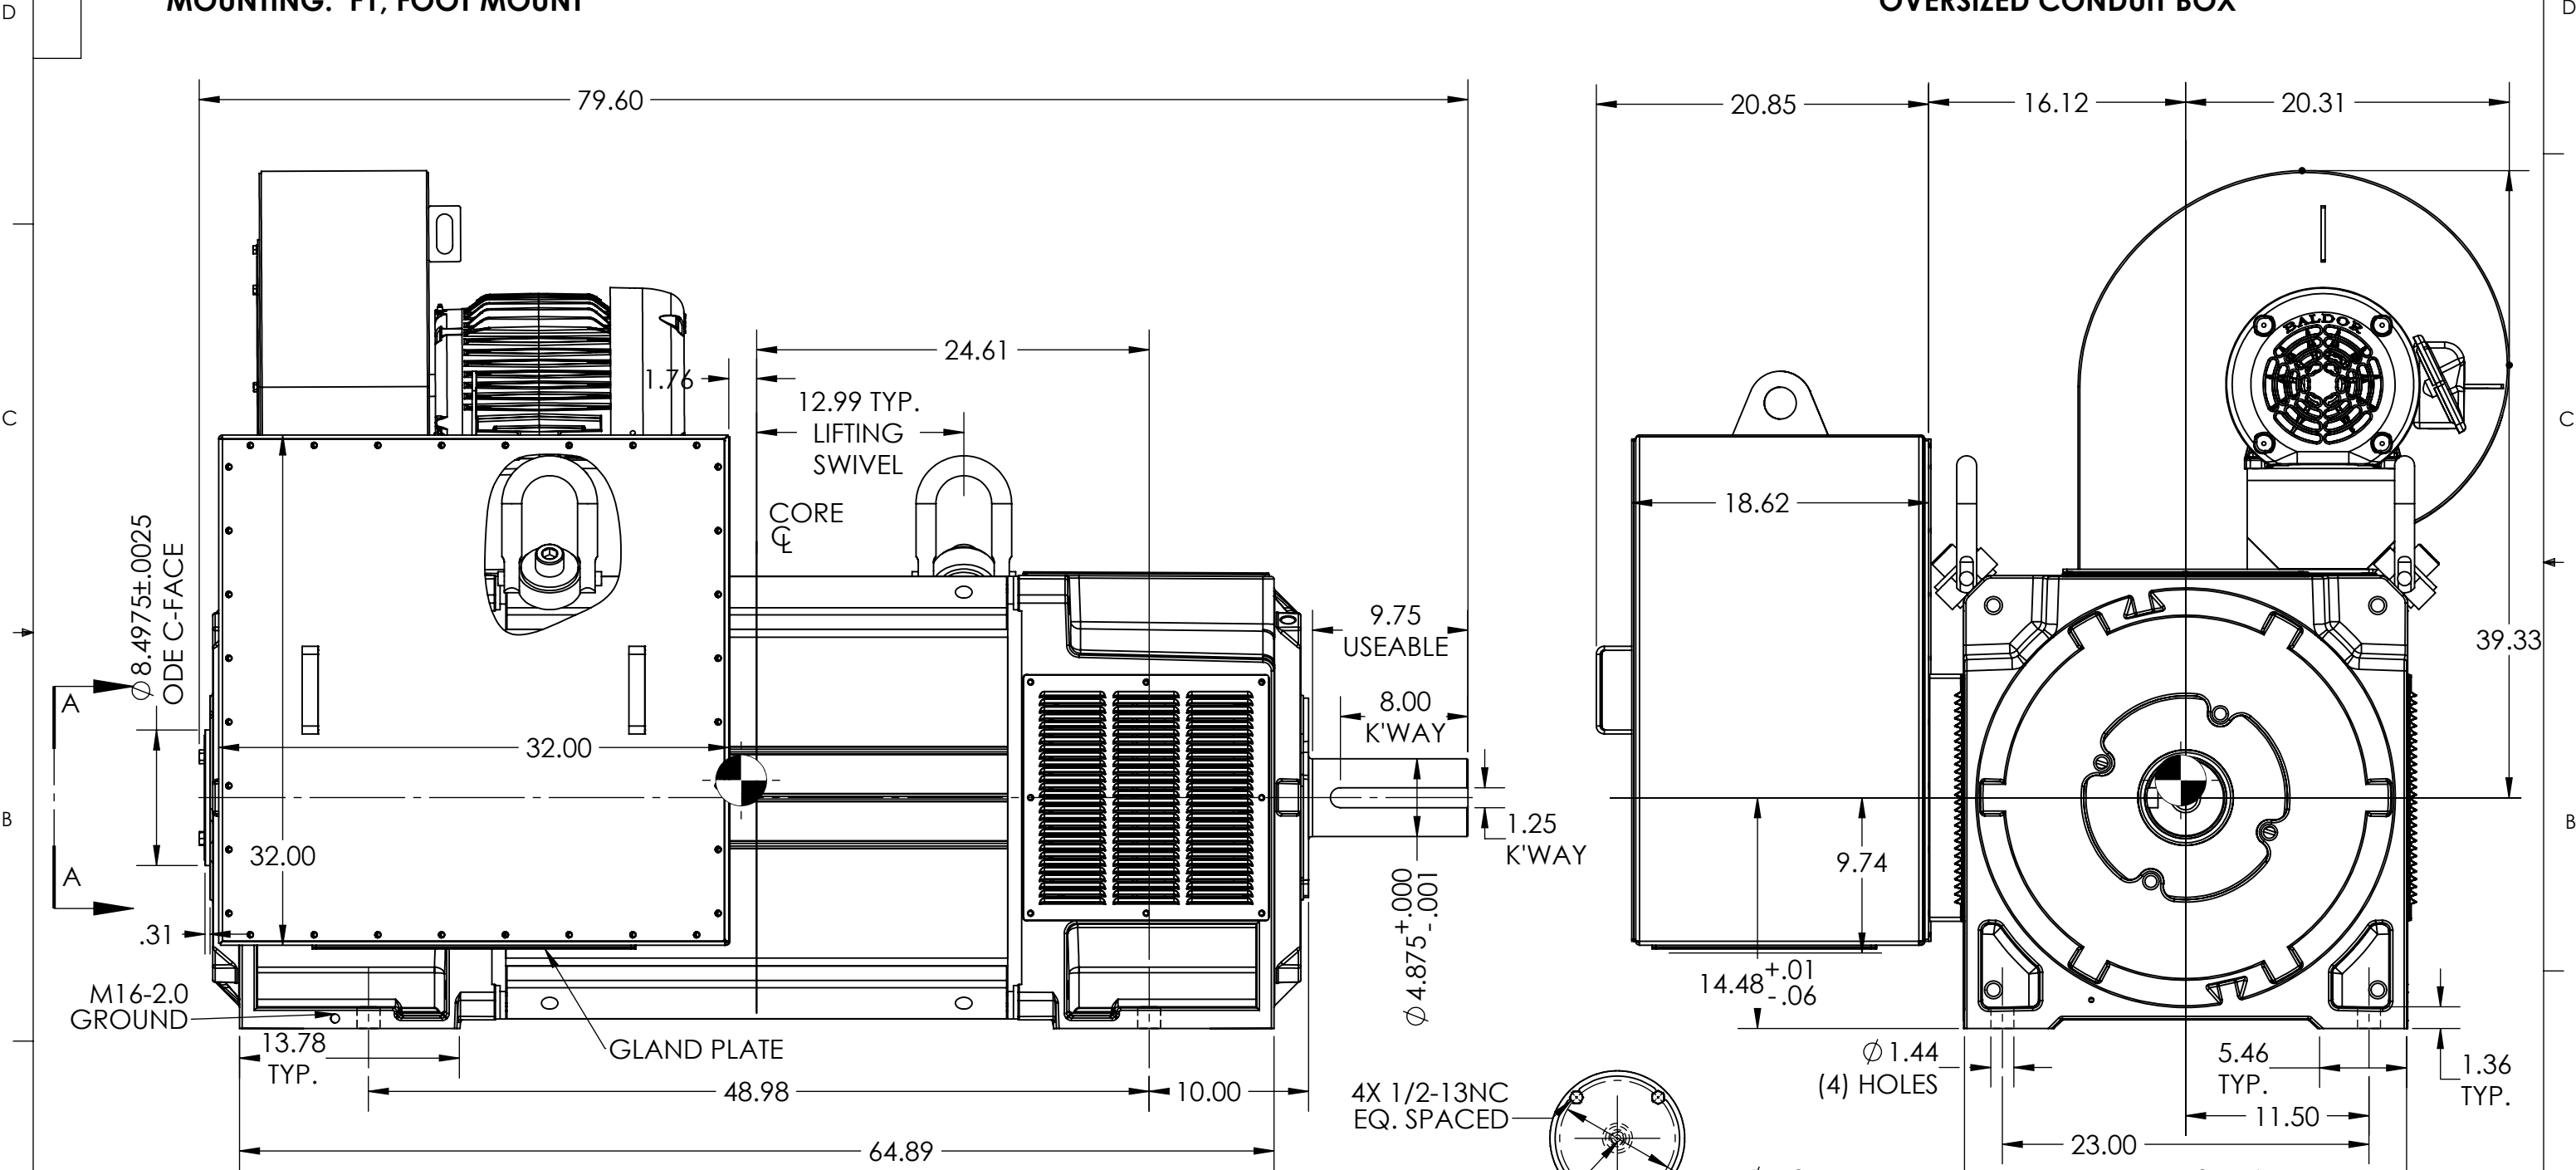

- NOTES:
- 1. MOTOR WEIGHTS MAY VARY +/- 15%
 - 2. SHAFT RUNOUT 0.003 T.I.R. MAX
 - 3. DIMENSIONS ARE IN INCHES

COVER CAN BE REMOVED
FOR M12-1.75 STUB SHAFT

SECTION A-A
SCALE 1 : 10

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

RL5832	7897
FRAME SIZE	WT (LBS)

BALDOR-DODGE-RELIANCE PROPRIETARY & CONFIDENTIAL:
THIS DRAWING IS THE PROPERTY OF BALDOR-DODGE-RELIANCE
AND/OR ITS SUBSIDIARIES AND IS NOT TO BE USED, DUPLICATED
OR DISCLOSED WITHOUT THE EXPRESS WRITTEN PERMISSION
OF THE COMPANY.

REV. DESC: INCREASE BLOWER SIZE			
REV: A	VERSION: 01	REVISED: 07:36:47 05/27/2025	TDR: 000001256821
MODEL NO. 627006-001			REF: -
BY: MGHJMZ2			B

BALDOR - RELIANCE®

DIM SHEET,RL5832,DPFV,F1 CBOX

627006-001