CD0831A02

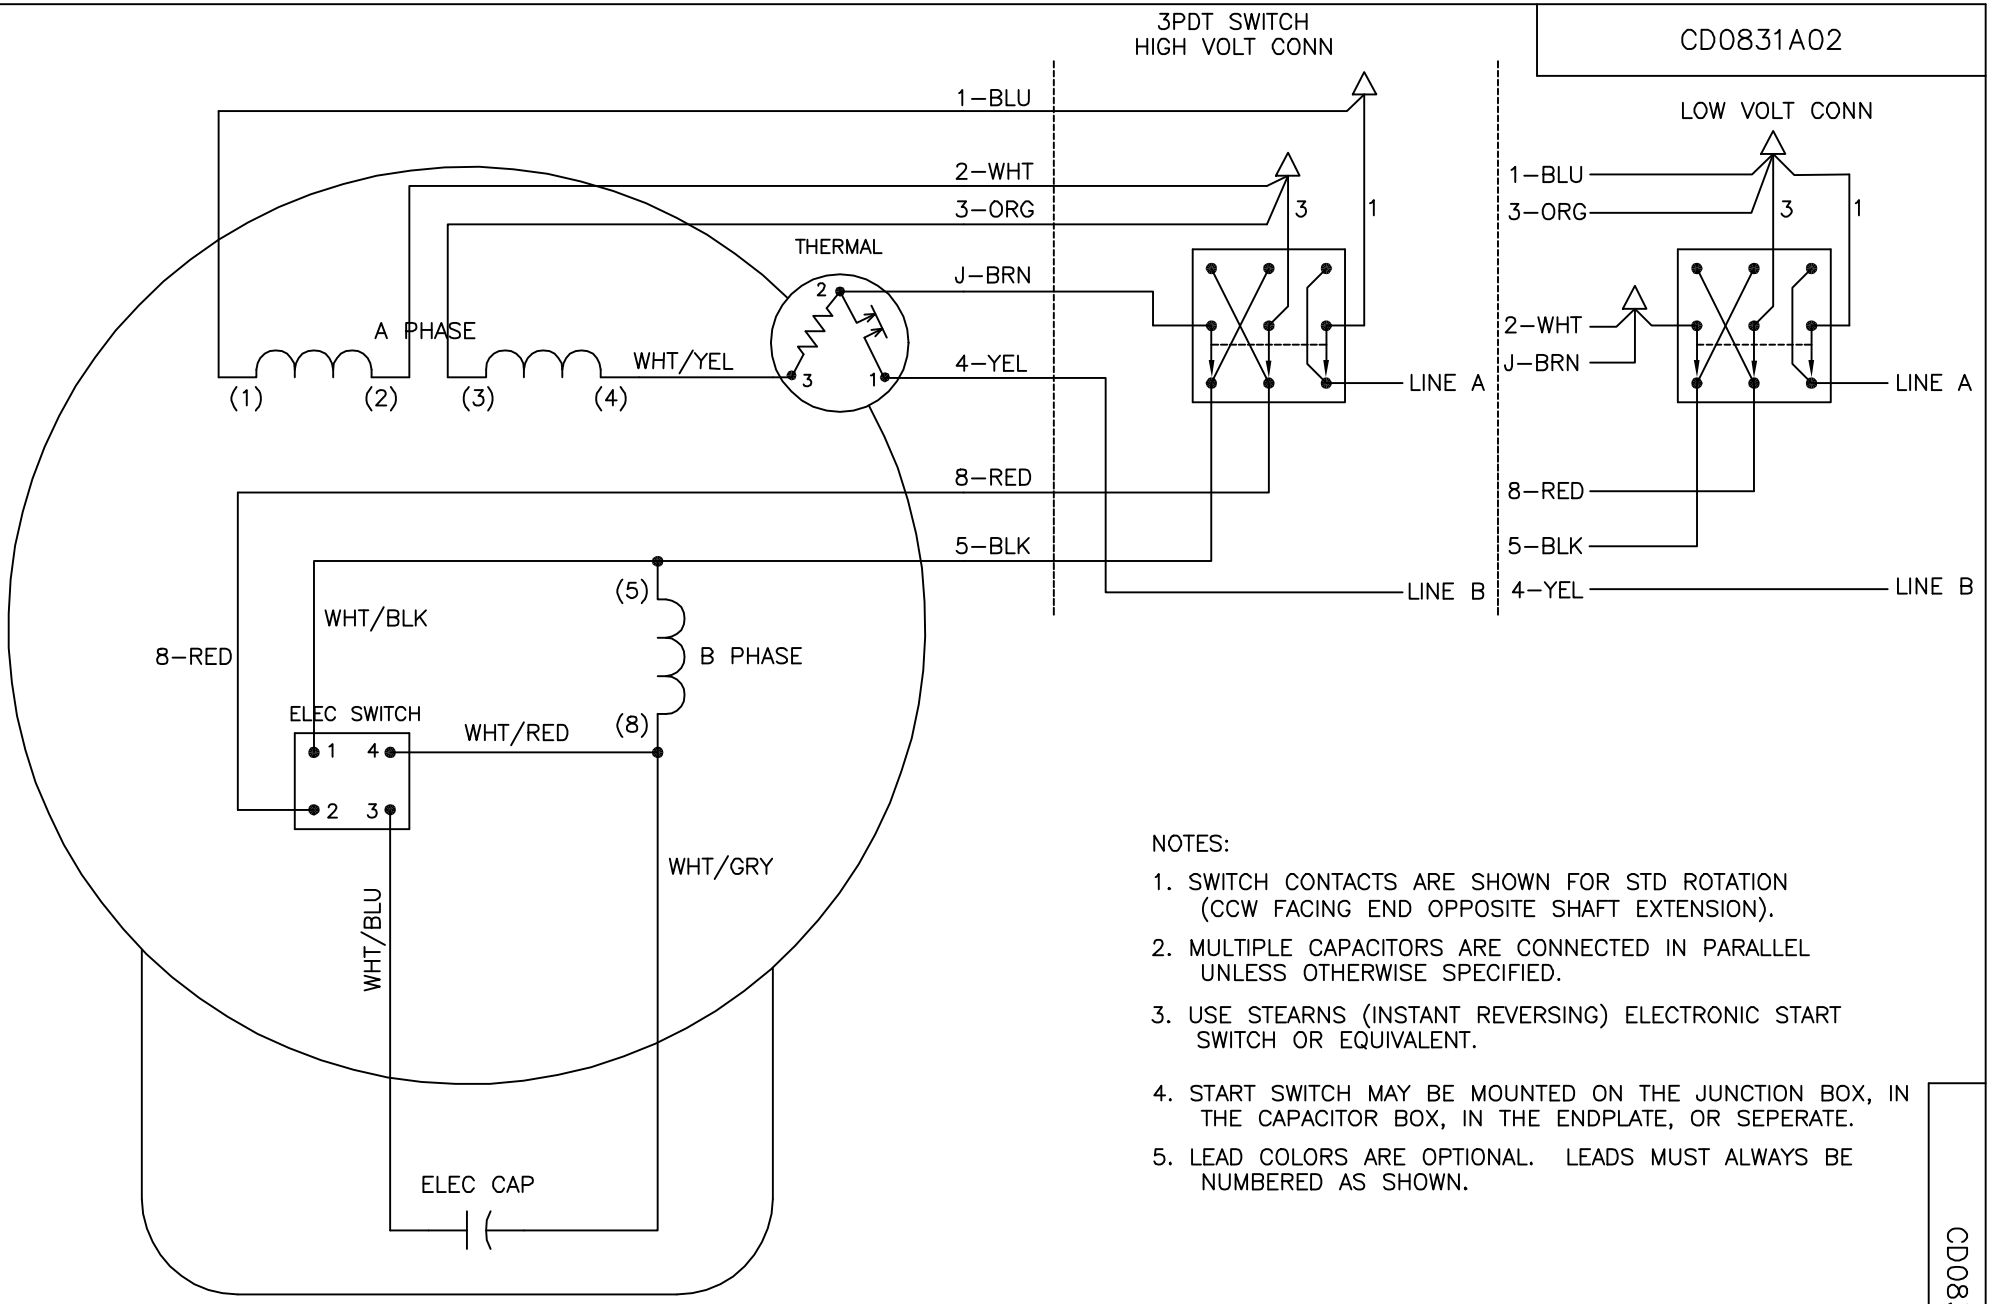

NOTES:

1. SWITCH CONTACTS ARE SHOWN FOR STD ROTATION (CCW FACING END OPPOSITE SHAFT EXTENSION).
2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
3. USE STEARNS (INSTANT REVERSING) ELECTRONIC START SWITCH OR EQUIVALENT.
4. START SWITCH MAY BE MOUNTED ON THE JUNCTION BOX, IN THE CAPACITOR BOX, IN THE ENDPLATE, OR SEPERATE.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0831A02

REV. DESC: NEW			
REV. LTR: –	VERSION: 00	TDR: 000000525293	
FILE: \AAA\00168\985		REVISED: 09:12:24 01/21/2010	
MTL: –			BY: ENWINBO

BALDOR • DODGE • RELIANCE

TYPE L, DV, INST REV, THERMAL, 7 LEAD, ELECTRONIC SWITCH

SH 1 of 1