CD0769

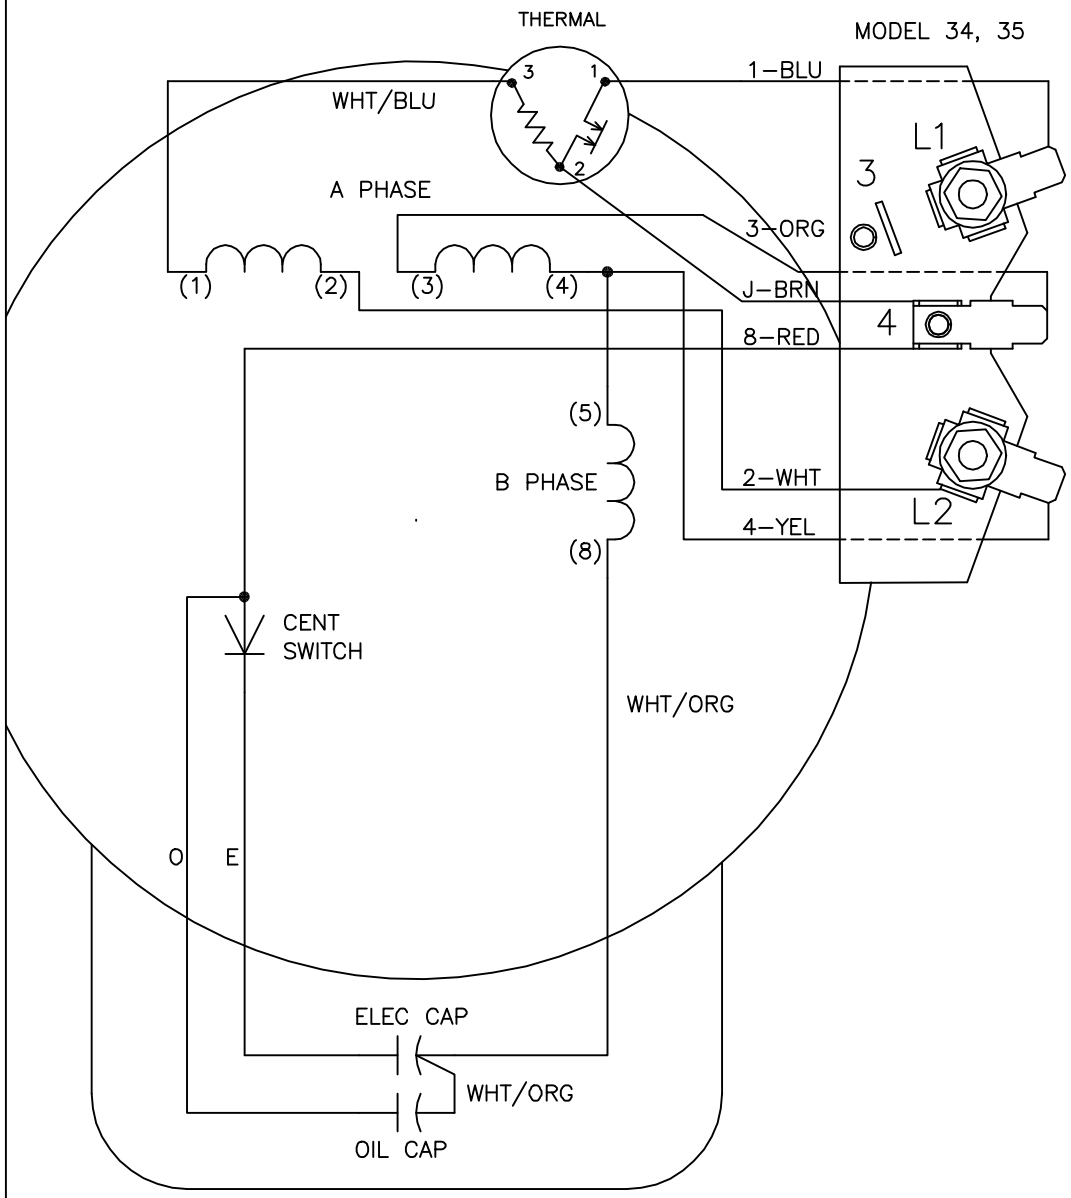

NOTES:

1. CONNECT LINE LEADS TO L1 AND L2.

   LOW VOLTAGE: CONNECT AS SHOWN.

   HIGH VOLTAGE: MOVE LEAD J TO TERM. 3.
   MOVE LEAD 2 TO TERM. 4.

2. CONNECTIONS ARE SHOWN FOR STANDARD ROTATION (CCW FACING END OPPOSITE SHAFT EXTENSION). INTERCHANGE 5 AND 8 INTERNALLY FOR OPPOSITE STANDARD ROTATION.

3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.

4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REMOVE OPTIONAL THERMAL CONNECTION			BALDOR ELECTRIC Co.
REV. LTR: E	VERSION: 01	TDR: 000000373051	
CD0769	FILE: \AAA\00007\260	REVISED: 15:13:50 09/08/2005	TYPE LC, DV, FIX, THERMAL, B PH AMPS THRU HTR–HVC,TERM PLATE
	MTL: –	BY: ENJOEPO	

CD0769