


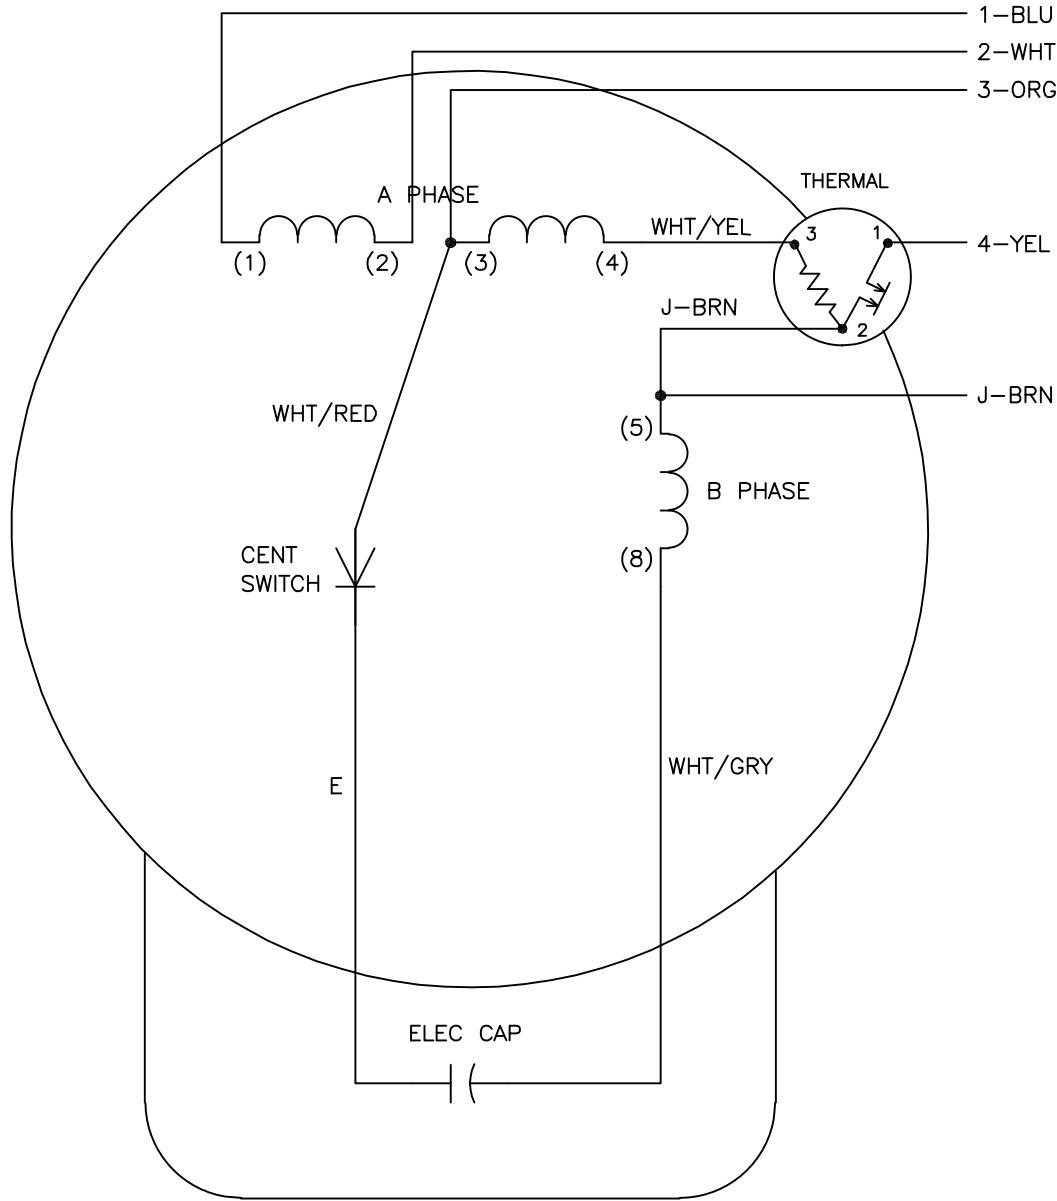

	LINE A	LINE B	JOIN	JOIN
HIGH	1	4	2,3	J
LOW	1,3	4	2,J	—

NOTES:

1. CONNECTIONS ARE SHOWN FOR CCW ROTATION FACING END OPPOSITE SHAFT EXTENSION (STD). FOR CW ROTATION, INTERCHANGE 5 AND 8 INTERNALLY.
2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: ADD B PH AMPS THRU HTR HVC TO DESCRIPTION

REV. LTR: F

VERSION: 02

TDR: 000001258306

FILE: \AAA\00007\476

REVISED: 03: 40: 33 06/18/2025

BY: ENBRI0

MTL: —



BALDOR - RELIANCE®

TYPE L, DV, FIX, THERMAL, B PH AMPS THRU HTR HVC, 5 LEAD

SH 1 of 1