

ABB Motors and Generators		Technical Data Sheet - DOL				
		Project		Location		
Department/Author		Customer name		Customer ref.		Item name
Our ref.		Rev/Changed by	Date of issue	Saving ident		Pages 1(3)


No.	Definition	Data	Unit	Remarks	
1	Product	TEFC, 3-phase, squirrel cage induction motor			
2	Product code	MM08752-PP (3GBP081322-ASB+332)			
3	Type/Frame	M3BP 80 MB 2			
4	Mounting	IM1001, B3(foot)			
5	Rated output P _N	0.75	kW		
6	Service factor	1			
7	Type of duty	S1(IEC) 100%			
8	Rated voltage U _N	230	VD	± 5 % (IEC 60034-1)	
9	Rated frequency f _N	50	Hz	± 2 % (IEC 60034-1)	
10	Rated speed n _N	2895	r/min		
11	Rated current I _N	3.1	A		
12	No-load current	2.1	A		
13	Starting current I _s /I _N	7.7		Fullfilled IEC 60034-12 design N,H	
14	Nominal torque T _N	2.5	Nm		
15	Locked rotor torque T _S /T _N	4.2			
16	Maximum torque T _{max} /T _N	4.2			
17	Minimum torque T _{min} /T _N	4.1			
18	Speed at minimum torque	420	r/min		
19	Load characteristics (IEC 60034-2-1:2007)	Load %	Current A	Efficiency %	Power factor
20	PLL determined from residual loss	100	3.1	80.6 / IE2	0.74
21		75	2.7	79.9	0.64
22		50	2.4	76.2	0.5
23		Start	24.3		0.72
24	Maximum starting time from hot	15	s		
25	Maximum starting time from cold	27	s		
26	Insulation class / Temperature class	F / B			
27	Ambient temperature	40	°C		
28	Altitude	1000	m.a.s.l.		
29	Enclosure	IP55			
30	Cooling system	IC411 self ventilated			
31	Bearing DE/NDE	6204-2Z/C3 - 6203-2Z/C3			
32	Type of Grease	Greased for life			
33	Sound pressure level (LP dB(A) 1m)	57	dB(A)	at load	
34	Moment of inertia J = ¼ GD2	0.001	kg-m2		
35	Balancing	Half Key			
36	Vibration class	Grade A			
37	Position of terminal box	Top			
38	Terminal box entries; no, dimens.	2xM25x1.5			
39	Number of power terminals	6			
40	Direction of rotation	CW or CCW			
41	Weight of rotor	2	kg		
42	Total weight of motor	16	kg		
43					

Variant Codes / Definition

332 = Baldor catalog number

Remarks:

Data based on situation 3/14/2012
All data subject to tolerances in accordance with IEC
Guaranteed values on request

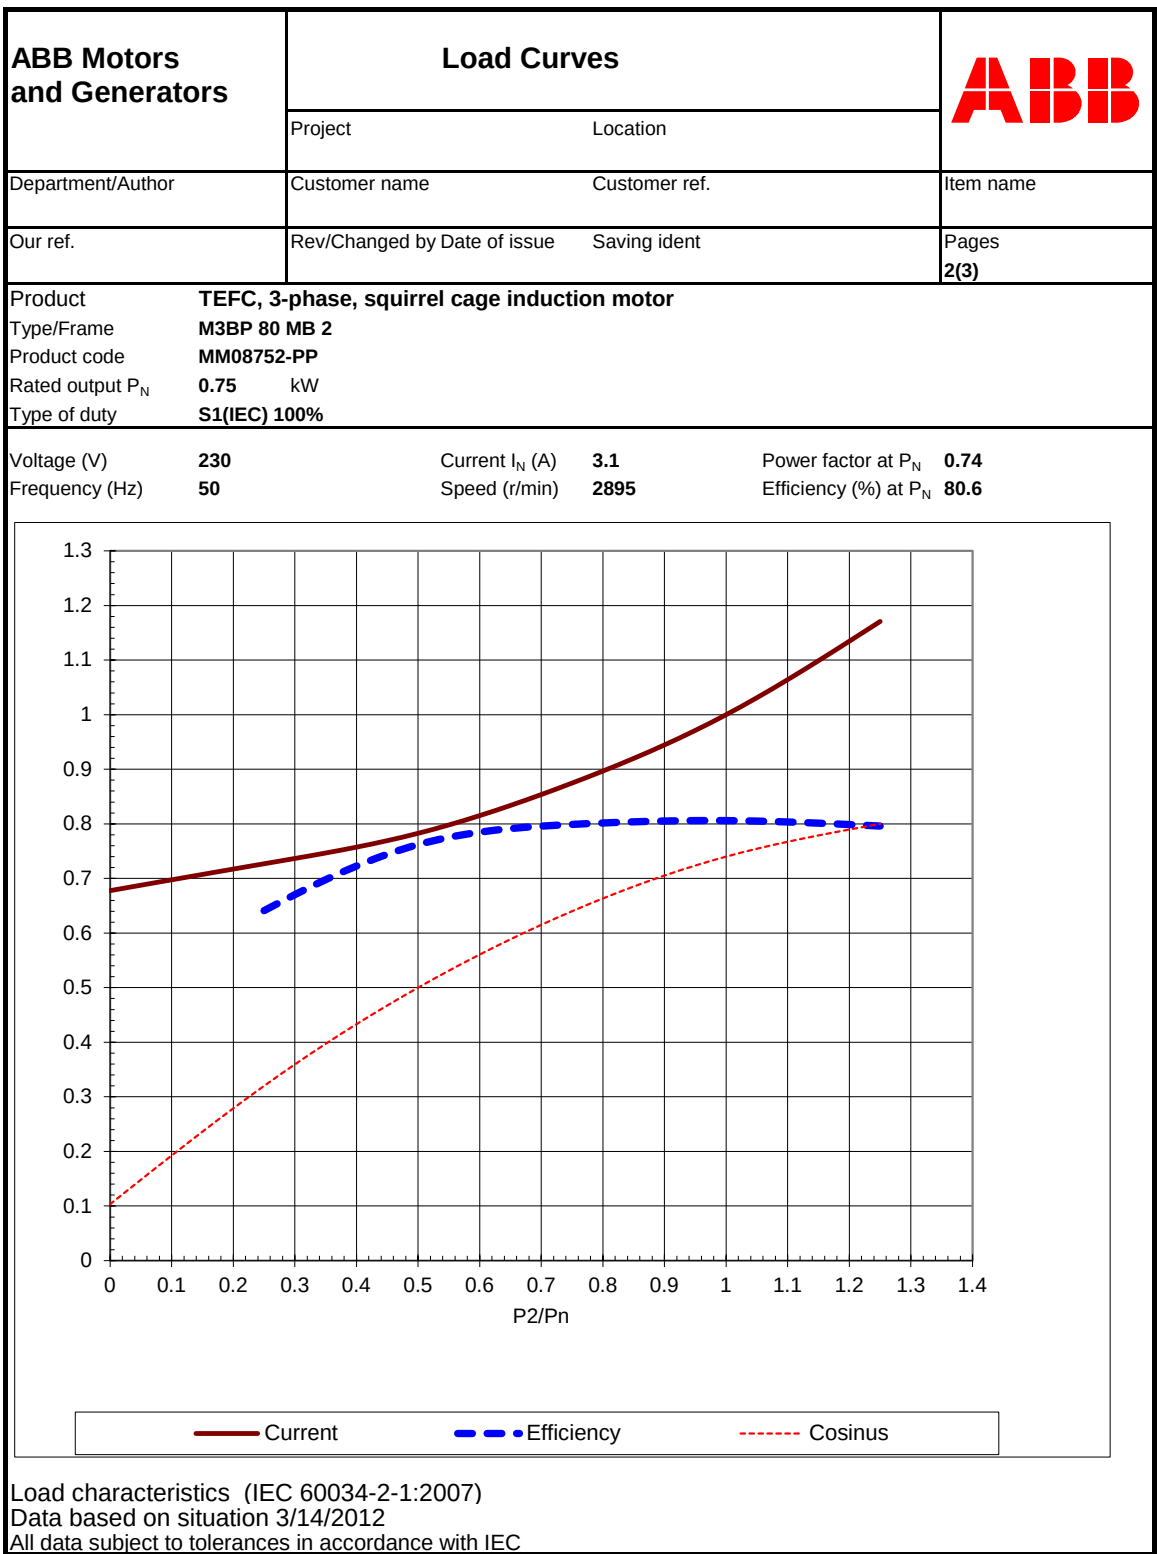

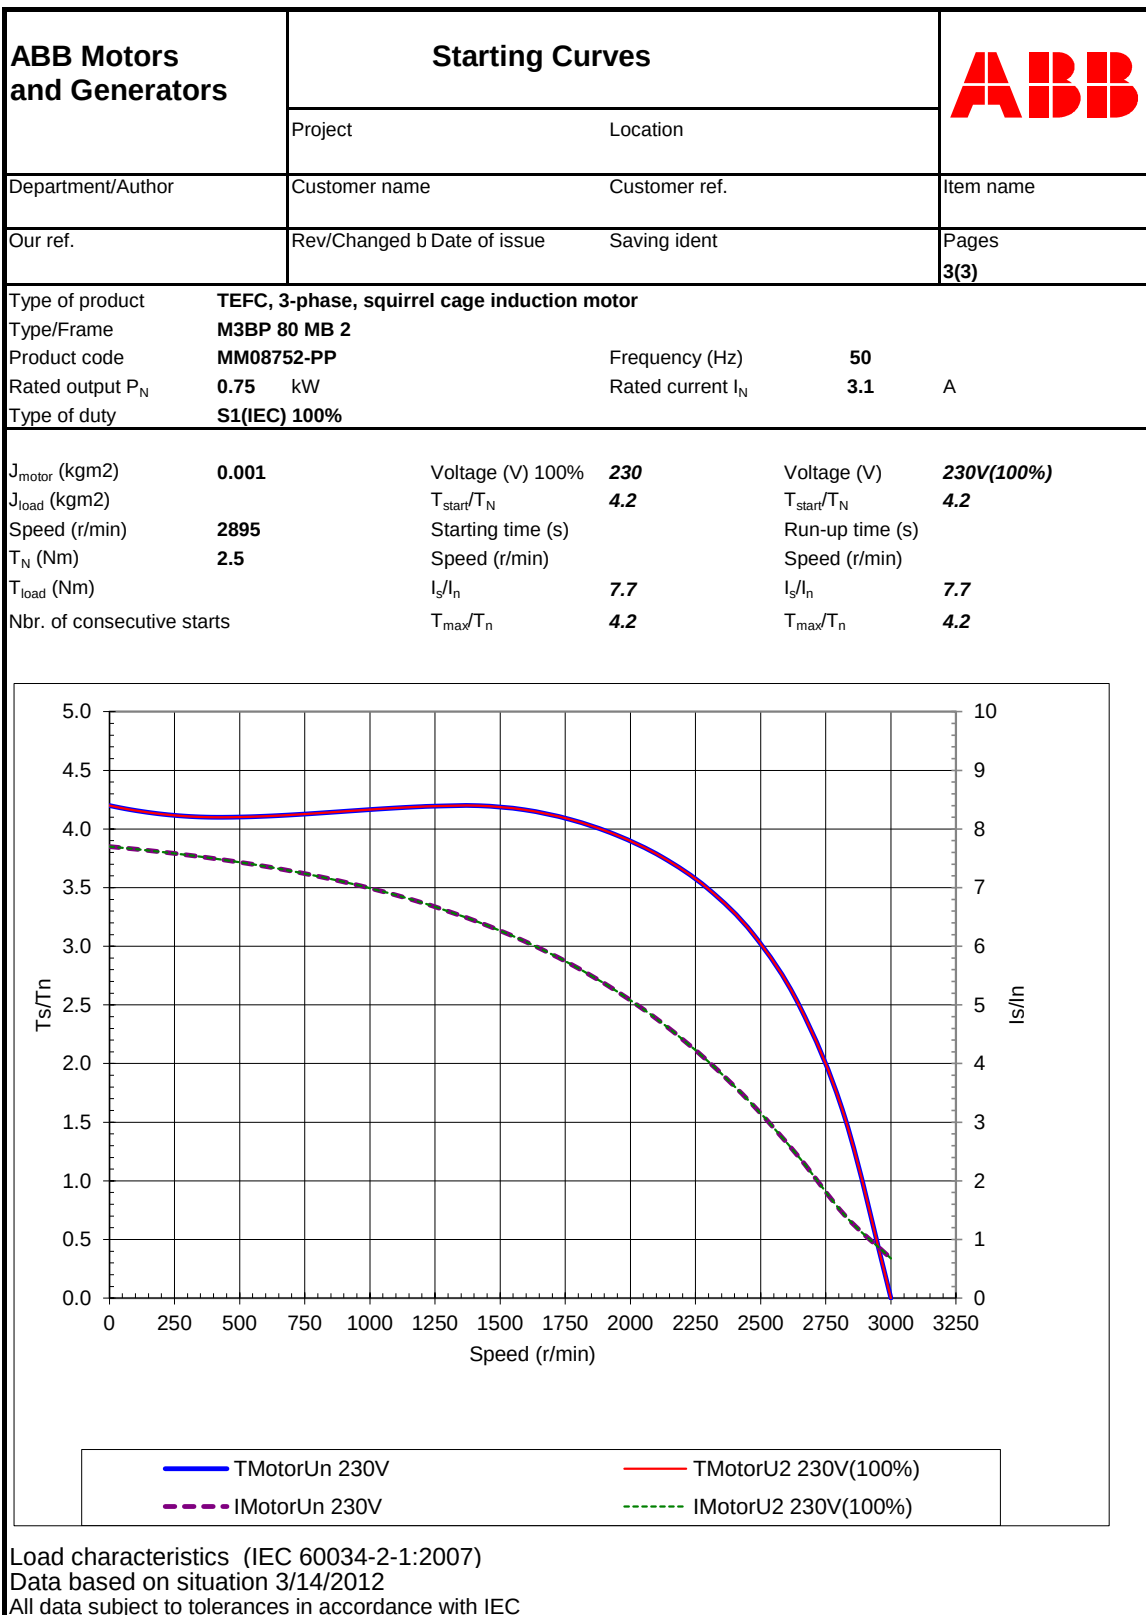


ABB Motors and Generators		Technical Data Sheet - DOL				
		Project		Location		
Department/Author		Customer name		Customer ref.		Item name
Our ref.		Rev/Changed by	Date of issue	Saving ident		Pages 1(3)

No.	Definition	Data	Unit	Remarks		
1	Product	TEFC, 3-phase, squirrel cage induction motor				
2	Product code	MM08752-PP (3GBP081322-ASB+332)				
3	Type/Frame	M3BP 80 MB 2				
4	Mounting	IM1001, B3(foot)				
5	Rated output P _N	0.75	kW			
6	Service factor	1				
7	Type of duty	S1(IEC) 100%				
8	Rated voltage U _N	400	VY	± 5 % (IEC 60034-1)		
9	Rated frequency f _N	50	Hz	± 2 % (IEC 60034-1)		
10	Rated speed n _N	2895	r/min			
11	Rated current I _N	1.81	A			
12	No-load current	1.23	A			
13	Starting current I _s /I _N	7.7		Fullfilled IEC 60034-12 design N,H		
14	Nominal torque T _N	2.5	Nm			
15	Locked rotor torque T _s /T _N	4.2				
16	Maximum torque T _{max} /T _N	4.2				
17	Minimum torque T _{min} /T _N	4.1				
18	Speed at minimum torque	420	r/min			
19	Load characteristics (IEC 60034-2-1:2007)	Load %	Current A	Efficiency %	Power factor	
20	PLL determined from residual loss	100	1.81	80.6 / IE2	0.74	
21		75	1.58	79.9	0.64	
22		50	1.42	76.2	0.5	
23		Start	13.9		0.72	
24	Maximum starting time from hot	15	s			
25	Maximum starting time from cold	27	s			
26	Insulation class / Temperature class	F / B				
27	Ambient temperature	40	°C			
28	Altitude	1000	m.a.s.l.			
29	Enclosure	IP55				
30	Cooling system	IC411 self ventilated				
31	Bearing DE/NDE	6204-2Z/C3 - 6203-2Z/C3				
32	Type of Grease	Greased for life				
33	Sound pressure level (LP dB(A) 1m)	57	dB(A)	at load		
34	Moment of inertia J = ¼ GD ²	0.001	kg-m2			
35	Balancing	Half Key				
36	Vibration class	Grade A				
37	Position of terminal box	Top				
38	Terminal box entries; no, dimens.	2xM25x1.5				
39	Number of power terminals	6				
40	Direction of rotation	CW or CCW				
41	Weight of rotor	2	kg			
42	Total weight of motor	16	kg			
43						

Variant Codes / Definition


332 = Baldor catalog number

Remarks:

Data based on situation 3/14/2012

All data subject to tolerances in accordance with IEC

Guaranteed values on request

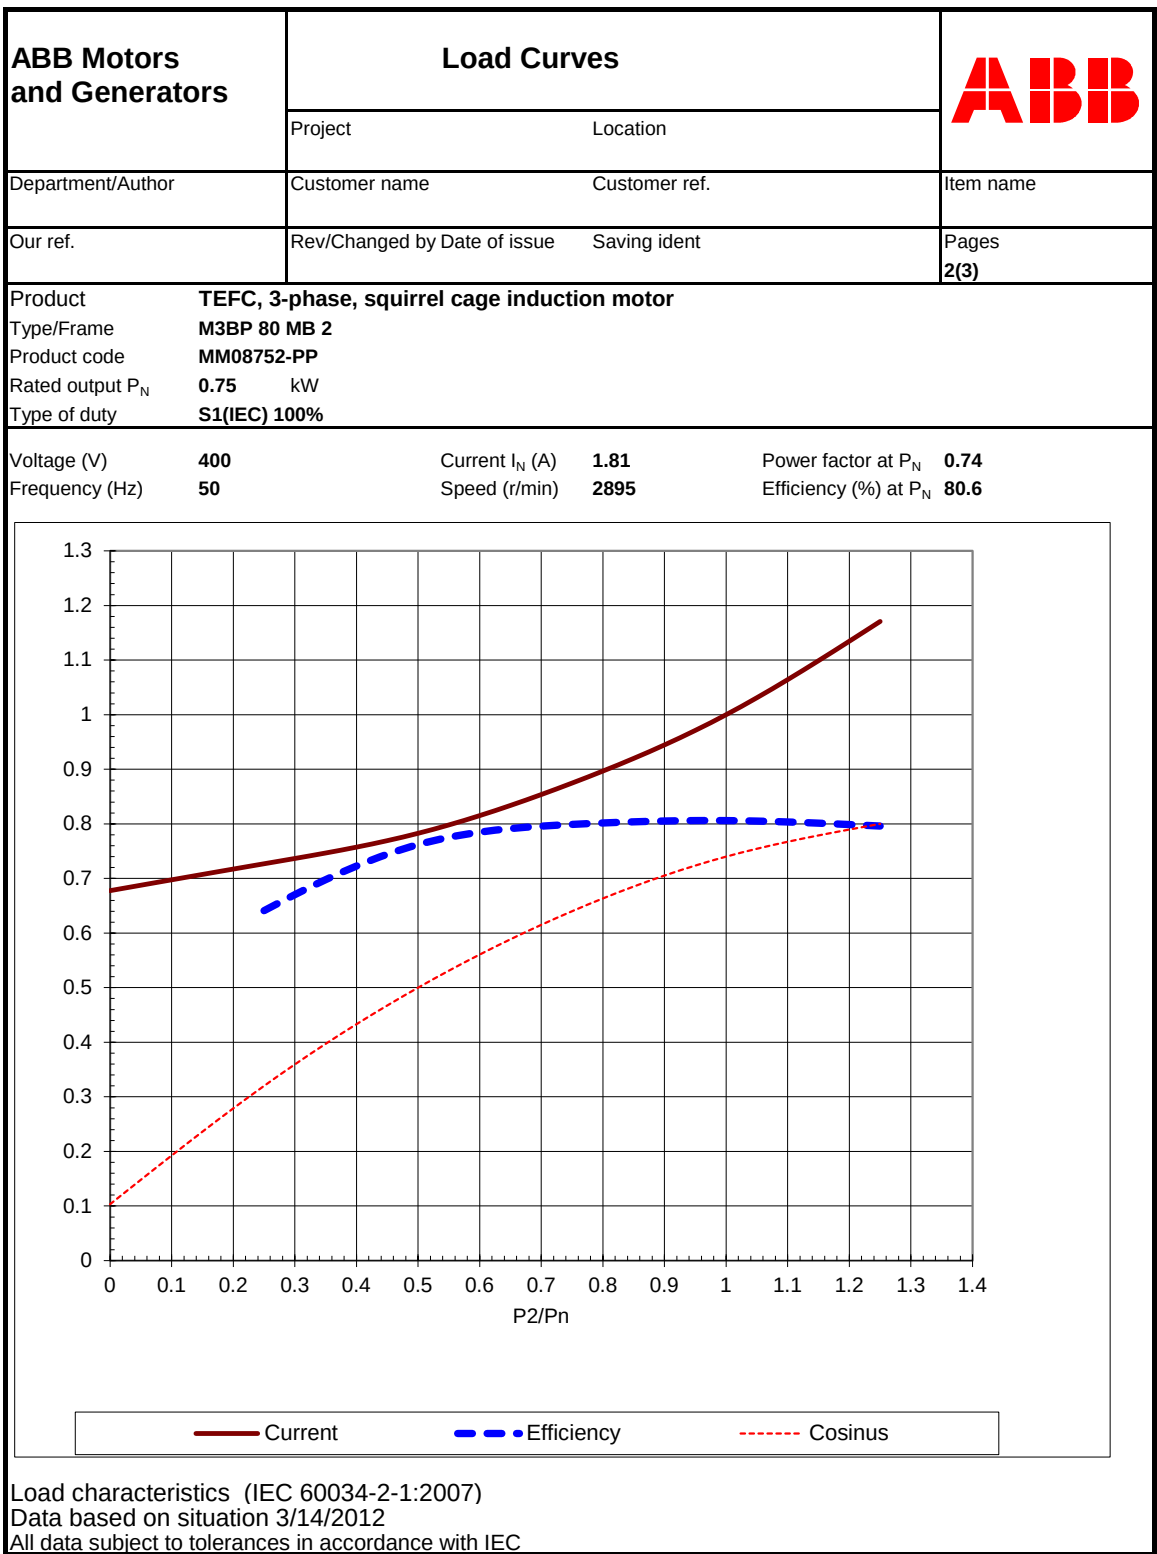

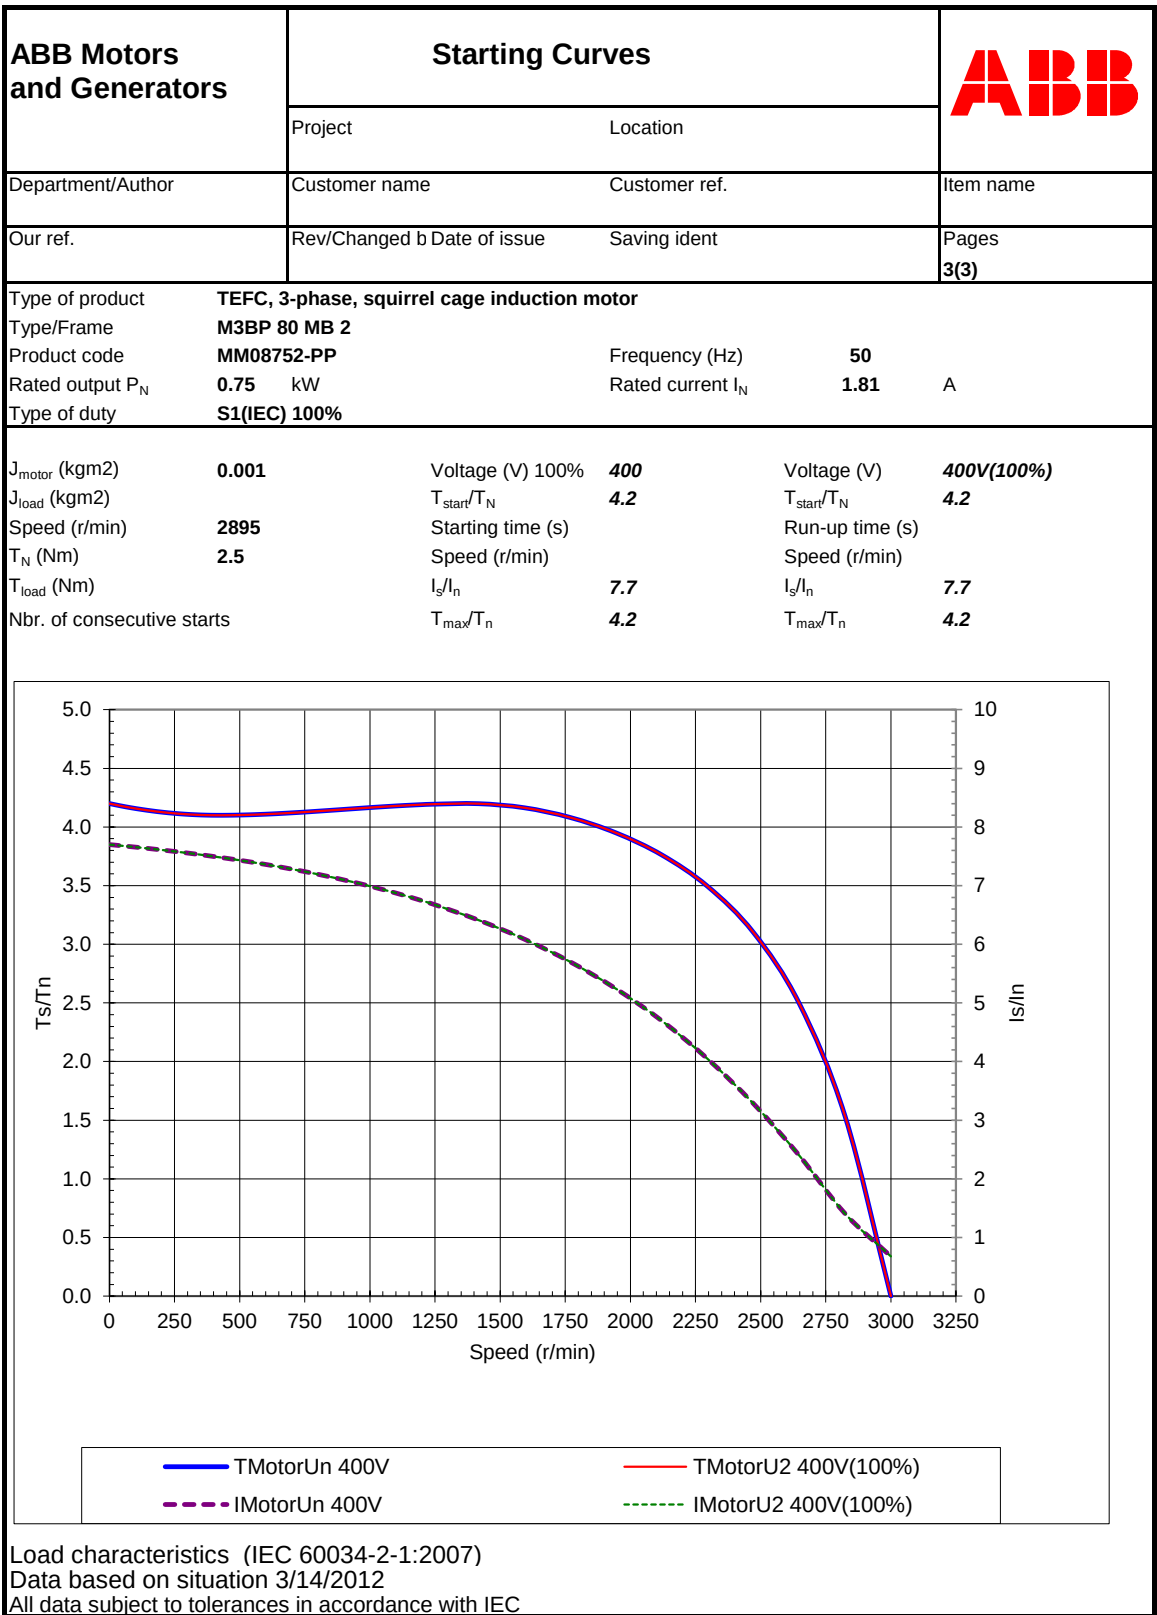


ABB Motors and Generators		Technical Data Sheet - DOL			
		Project _____		Location _____	
Department/Author _____		Customer name _____		Customer ref. _____	
Our ref. _____		Rev/Changed by _____		Date of issue _____	
				Saving ident _____	
				Pages 1(3)	

No.	Definition	Data	Unit	Remarks	
1	Product	TEFC, 3-phase, squirrel cage induction motor			
2	Product code	MM08752-PP (3GBP081322-ASB+332)			
3	Type/Frame	M3BP 80 MB 2			
4	Mounting	IM1001, B3(foot)			
5	Rated output P _N	0.75	kW		
6	Service factor	1			
7	Type of duty	S1(IEC) 100%			
8	Rated voltage U _N	460	VY	± 5 % (IEC 60034-1)	
9	Rated frequency f _N	60	Hz	± 2 % (IEC 60034-1)	
10	Rated speed n _N	3510	r/min		
11	Rated current I _N	1.6	A		
12	No-load current	1.09	A		
13	Starting current I _s /I _N	9.1		Fullfilled IEC 60034-12 design N,H	
14	Nominal torque T _N	2	Nm		
15	Locked rotor torque T _S /T _N	4.5			
16	Maximum torque T _{max} /T _N	5.2			
17	Minimum torque T _{min} /T _N	4.4			
18	Speed at minimum torque	504	r/min		
19	Load characteristics (IEC 60034-2-1:2007)	Load %	Current A	Efficiency %	
20	PLL determined from residual loss	100	1.6	81.7	
21		75	1.39	80.1	
22		50	1.27	75.6	
23		Start	14.5	0.65	
24	Maximum starting time from hot	15	s		
25	Maximum starting time from cold	27	s		
26	Insulation class / Temperature class	F / B			
27	Ambient temperature	40	°C		
28	Altitude	1000	m.a.s.l.		
29	Enclosure	IP55			
30	Cooling system	IC411 self ventilated			
31	Bearing DE/NDE	6204-2Z/C3 - 6203-2Z/C3			
32	Type of Grease	Greased for life			
33	Sound pressure level (LP dB(A) 1m)	64	dB(A)	at load	
34	Moment of inertia J = ¼ GD2	0.001	kg-m2		
35	Balancing	Half Key			
36	Vibration class	Grade A			
37	Position of terminal box	Top			
38	Terminal box entries; no, dimens.	2xM25x1.5			
39	Number of power terminals	6			
40	Direction of rotation	CW or CCW			
41	Weight of rotor	2	kg		
42	Total weight of motor	16	kg		
43					

Variant Codes / Definition
 332 = Baldor catalog number

Remarks:

 Data based on situation 3/14/2012
 All data subject to tolerances in accordance with IEC
 Guaranteed values on request


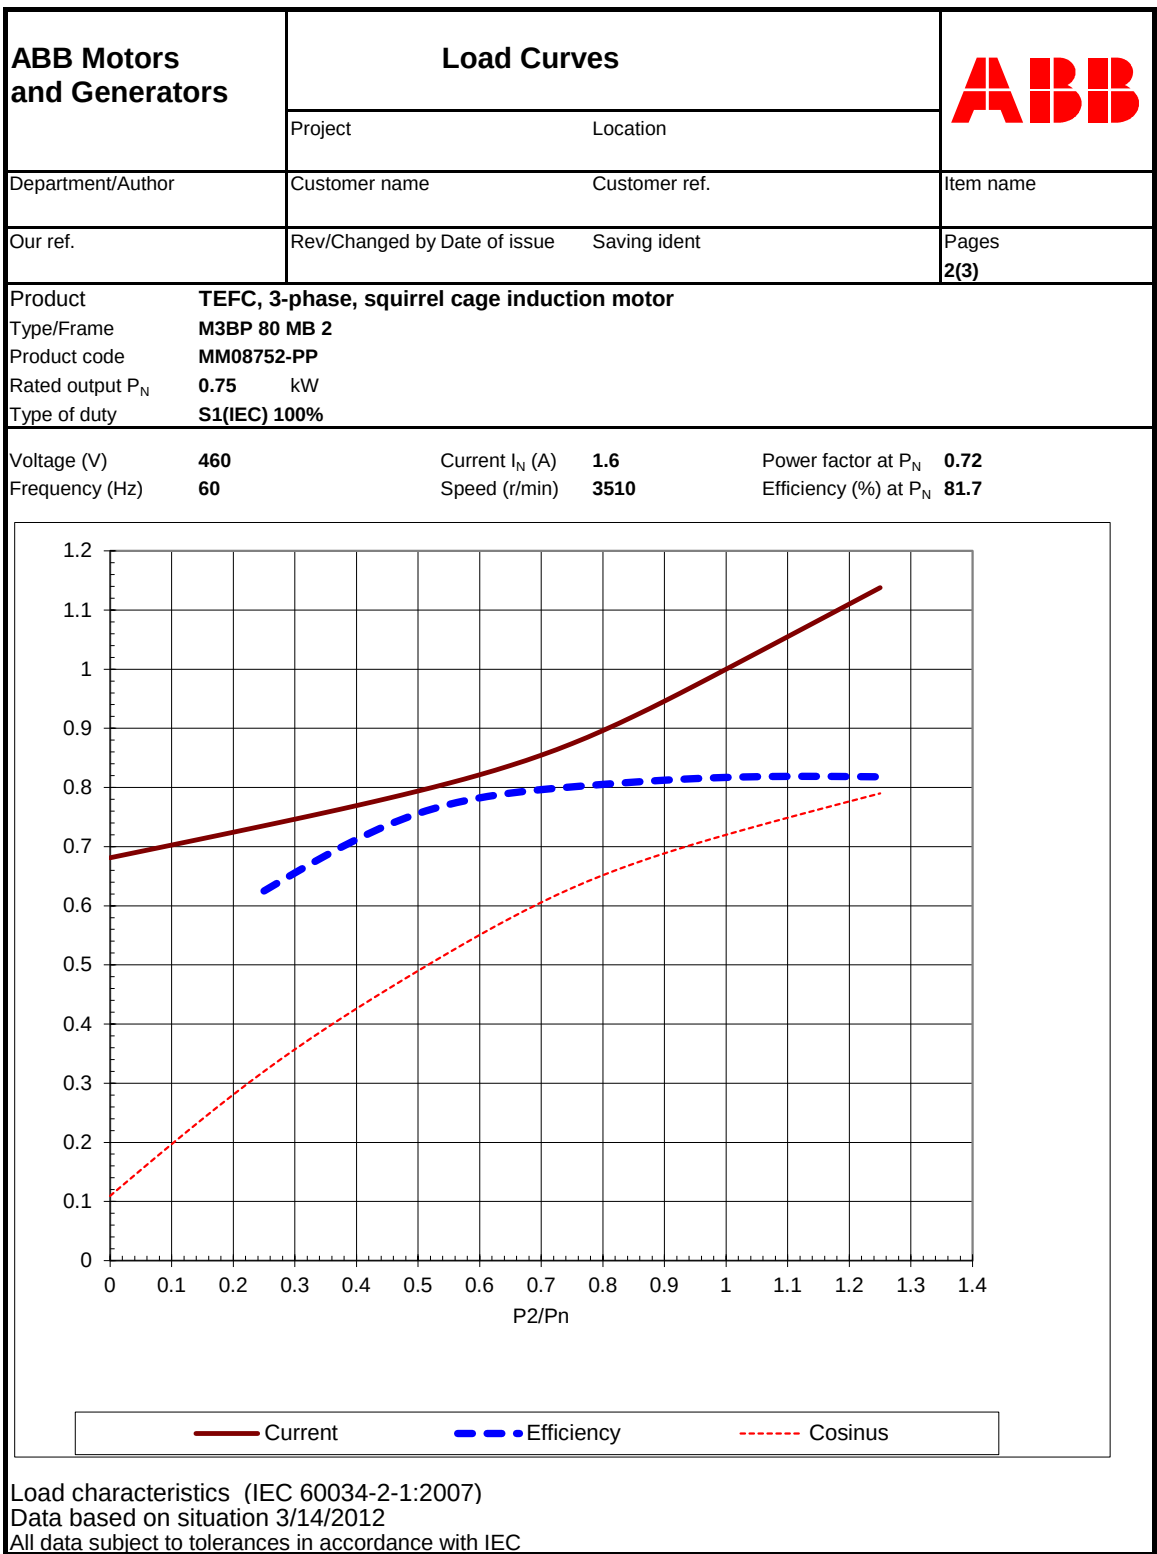


ABB Motors and Generators	Starting Curves		ABB
	Project	Location	
Department/Author	Customer name	Customer ref.	Item name
Our ref.	Rev/Changed b	Date of issue	Saving ident
			Pages 3(3)

Type of product	TEFC, 3-phase, squirrel cage induction motor		
Type/Frame	M3BP 80 MB 2		
Product code	MM08752-PP	Frequency (Hz)	60
Rated output P_N	0.75 kW	Rated current I_N	1.6 A
Type of duty	S1(IEC) 100%		

J_{motor} (kgm ²)	0.001	Voltage (V) 100%	460	Voltage (V)	460V(100%)
J_{load} (kgm ²)		T_{start}/T_N	4.5	T_{start}/T_N	4.5
Speed (r/min)	3510	Starting time (s)		Run-up time (s)	
T_N (Nm)	2	Speed (r/min)		Speed (r/min)	
T_{load} (Nm)		I_s/I_N	9.1	I_s/I_N	9.1
Nbr. of consecutive starts		T_{max}/T_N	5.2	T_{max}/T_N	5.2

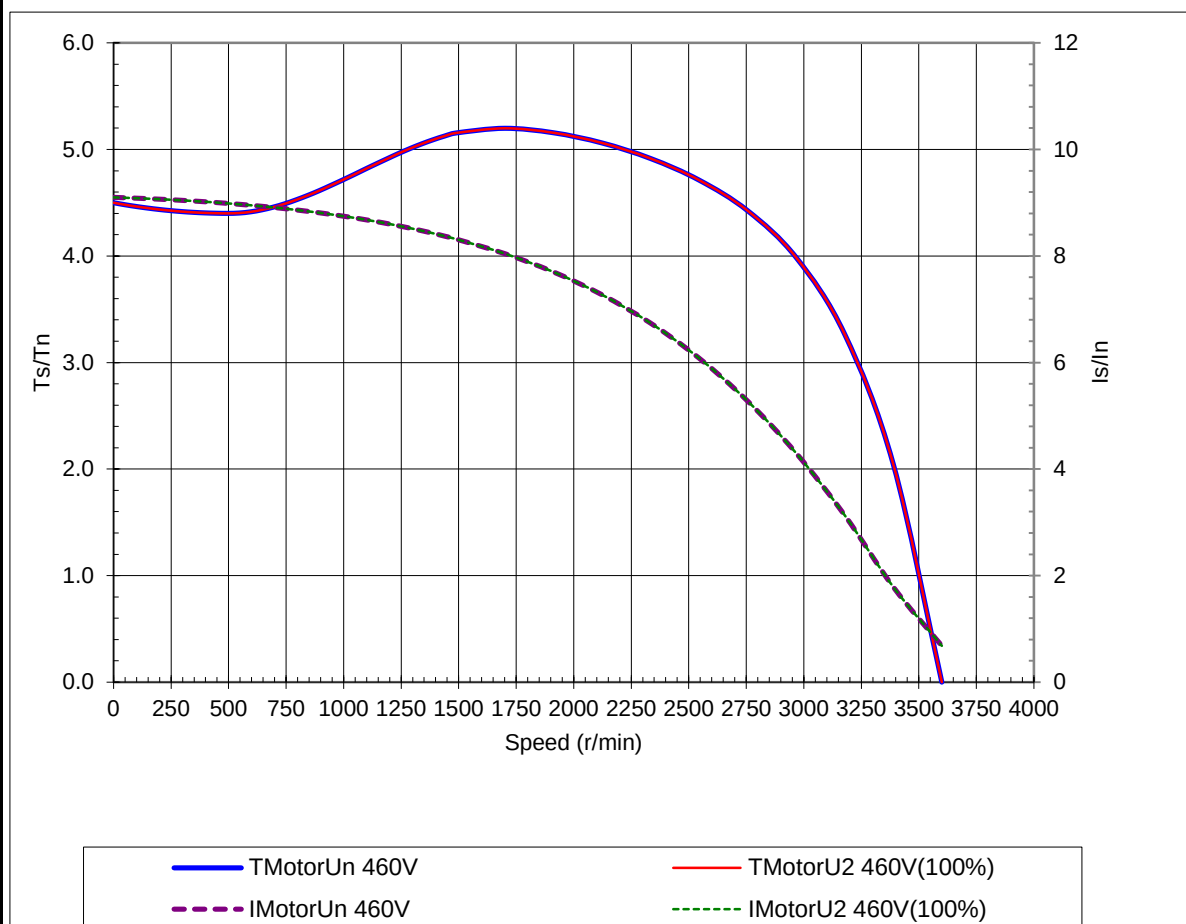

Load characteristics (IEC 60034-2-1:2007)
 Data based on situation 3/14/2012
 All data subject to tolerances in accordance with IEC