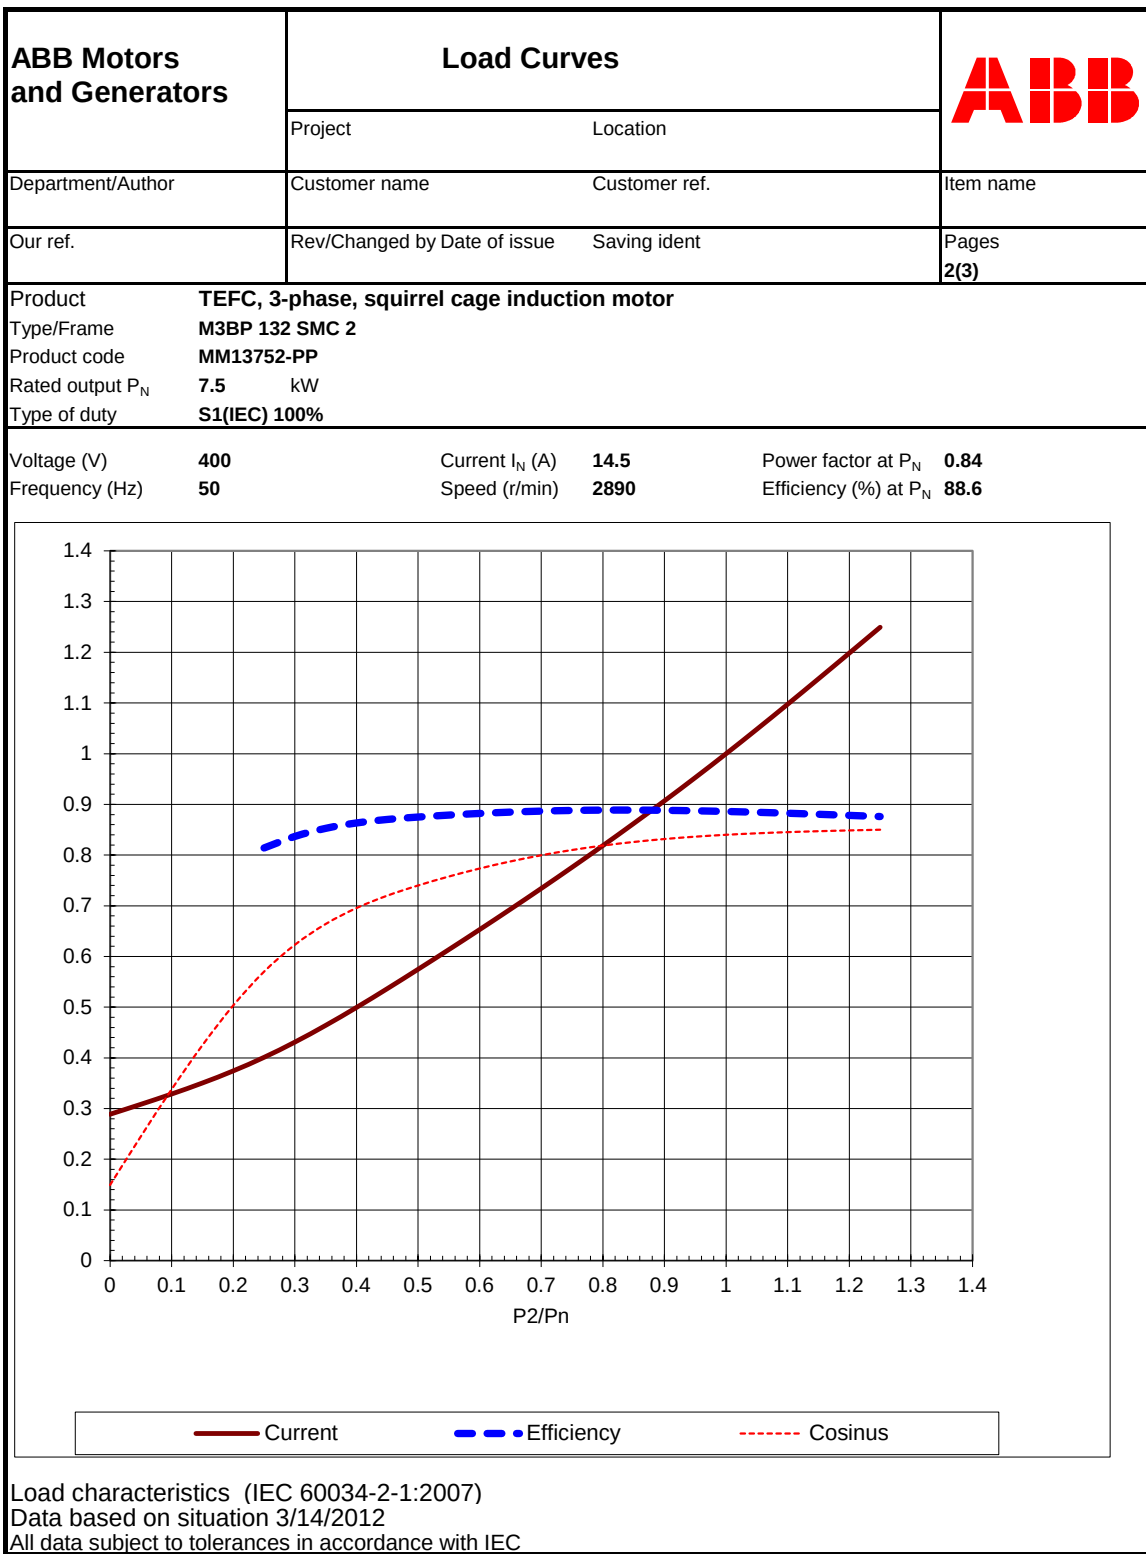


ABB Motors and Generators		Technical Data Sheet - DOL				
		Project		Location		
Department/Author		Customer name		Customer ref.		Item name
Our ref.		Rev/Changed by	Date of issue	Saving ident	Pages 1(3)	

No.	Definition	Data	Unit	Remarks	
1	Product	TEFC, 3-phase, squirrel cage induction motor			
2	Product code	MM13752-PP (3GBP131324-ADB+332+333)			
3	Type/Frame	M3BP 132 SMC 2			
4	Mounting	IM1001, B3(foot)			
5	Rated output P _N	7.5	kW		
6	Service factor	1			
7	Type of duty	S1(IEC) 100%			
8	Rated voltage U _N	400	VD	± 5 % (IEC 60034-1)	
9	Rated frequency f _N	50	Hz	± 2 % (IEC 60034-1)	
10	Rated speed n _N	2890	r/min		
11	Rated current I _N	14.5	A		
12	No-load current	4.2	A		
13	Starting current I _s /I _N	7.3		Fullfilled IEC 60034-12 design N,H	
14	Nominal torque T _N	24.8	Nm		
15	Locked rotor torque T _S /T _N	2			
16	Maximum torque T _{max} /T _N	3.6			
17	Minimum torque T _{min} /T _N	2			
18	Speed at minimum torque	0	r/min		
19	Load characteristics (IEC 60034-2-1:2007)	Load %	Current A	Efficiency %	Power factor
20	PLL determined from residual loss	100	14.5	88.6 / IE2	0.84
21		75	11.2	88.8	0.81
22		50	8.3	87.5	0.74
23		Start	106		0.5
24	Maximum starting time from hot	15	s		
25	Maximum starting time from cold	27	s		
26	Insulation class / Temperature class	F / B			
27	Ambient temperature	40	°C		
28	Altitude	1000	m.a.s.l.		
29	Enclosure	IP55			
30	Cooling system	IC411 self ventilated			
31	Bearing DE/NDE	6208-2Z/C3 - 6208-2Z/C3			
32	Type of Grease	Greased for life			
33	Sound pressure level (LP dB(A) 1m)	70	dB(A)	at load	
34	Moment of inertia J = ¼ GD2	0.01359	kg-m2		
35	Balancing	Half Key			
36	Vibration class	Grade A			
37	Position of terminal box	Top			
38	Terminal box entries; no, dimens.	2xM32x1.5			
39	Number of power terminals	6			
40	Direction of rotation	CW or CCW			
41	Weight of rotor	7	kg		
42	Total weight of motor	70	kg		
43					

Variant Codes / Definition
332 = Baldor catalog number
333 = Not for use in the USA

Remarks:
Data based on situation 3/14/2012
All data subject to tolerances in accordance with IEC
Guaranteed values on request



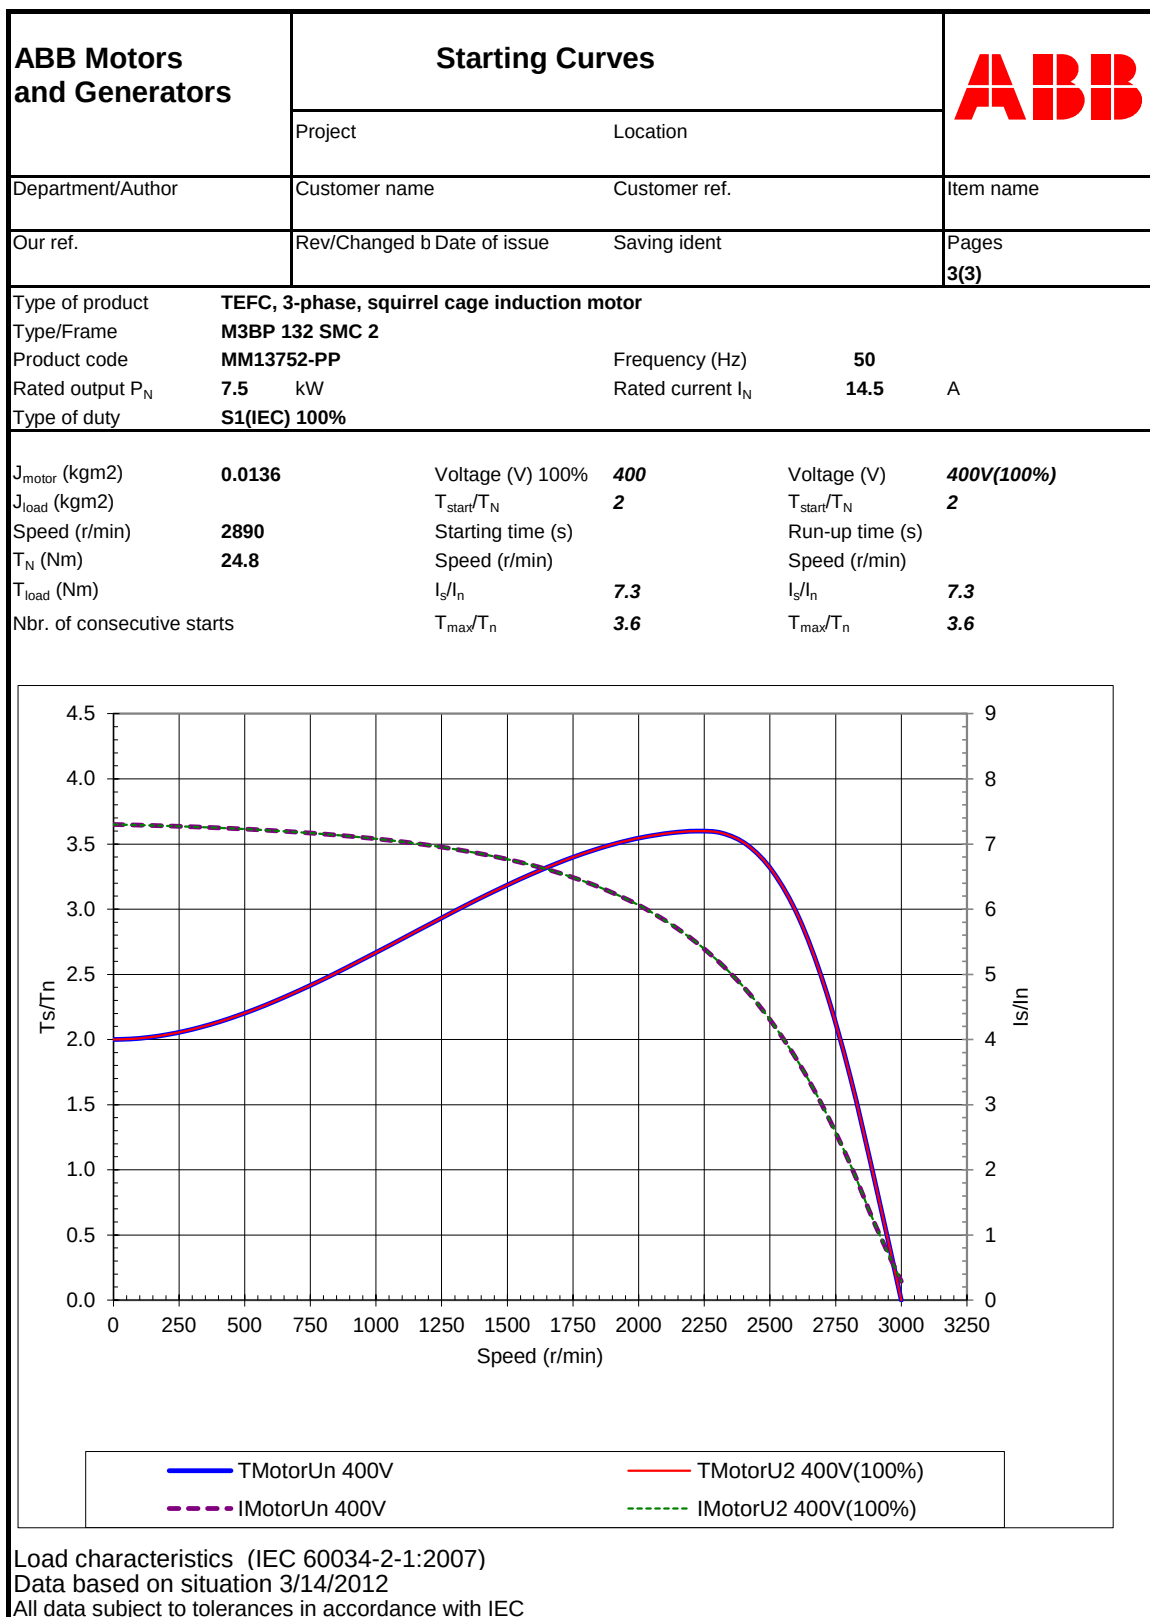
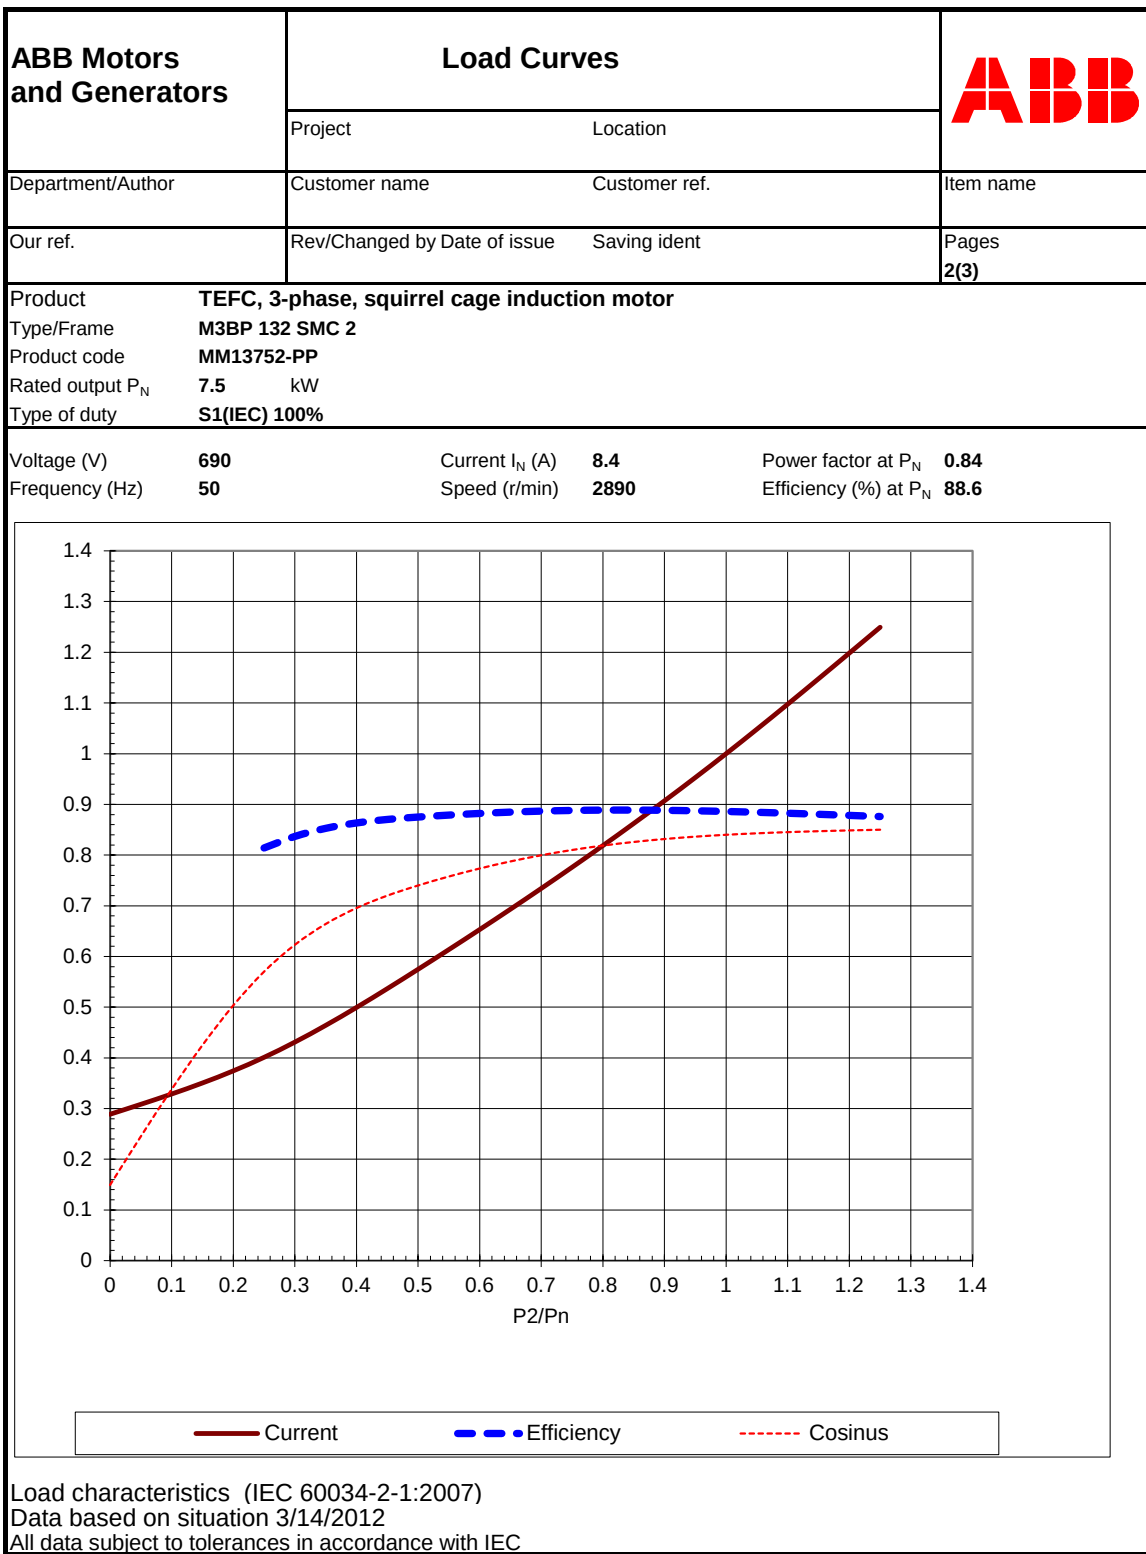


ABB Motors and Generators		Technical Data Sheet - DOL				
		Project		Location		
Department/Author		Customer name		Customer ref.		Item name
Our ref.		Rev/Changed by	Date of issue	Saving ident		Pages 1(3)

No.	Definition	Data	Unit	Remarks	
1	Product	TEFC, 3-phase, squirrel cage induction motor			
2	Product code	MM13752-PP (3GBP131324-ADB+332+333)			
3	Type/Frame	M3BP 132 SMC 2			
4	Mounting	IM1001, B3(foot)			
5	Rated output P _N	7.5	kW		
6	Service factor	1			
7	Type of duty	S1(IEC) 100%			
8	Rated voltage U _N	690	VY	± 5 % (IEC 60034-1)	
9	Rated frequency f _N	50	Hz	± 2 % (IEC 60034-1)	
10	Rated speed n _N	2890	r/min		
11	Rated current I _N	8.4	A		
12	No-load current	2.4	A		
13	Starting current I _s /I _N	7.3		Fullfilled IEC 60034-12 design N,H	
14	Nominal torque T _N	24.8	Nm		
15	Locked rotor torque T _S /T _N	2			
16	Maximum torque T _{max} /T _N	3.6			
17	Minimum torque T _{min} /T _N	2			
18	Speed at minimum torque	0	r/min		
19	Load characteristics (IEC 60034-2-1:2007)	Load %	Current A	Efficiency %	Power factor
20	PLL determined from residual loss	100	8.4	88.6 / IE2	0.84
21		75	6.5	88.8	0.81
22		50	4.8	87.5	0.74
23		Start	61		0.5
24	Maximum starting time from hot	15	s		
25	Maximum starting time from cold	27	s		
26	Insulation class / Temperature class	F / B			
27	Ambient temperature	40	°C		
28	Altitude	1000	m.a.s.l.		
29	Enclosure	IP55			
30	Cooling system	IC411 self ventilated			
31	Bearing DE/NDE	6208-2Z/C3 - 6208-2Z/C3			
32	Type of Grease	Greased for life			
33	Sound pressure level (LP dB(A) 1m)	70	dB(A)		at load
34	Moment of inertia J = ¼ GD2	0.01359	kg-m2		
35	Balancing	Half Key			
36	Vibration class	Grade A			
37	Position of terminal box	Top			
38	Terminal box entries; no, dimens.	2xM32x1.5			
39	Number of power terminals	6			
40	Direction of rotation	CW or CCW			
41	Weight of rotor	7	kg		
42	Total weight of motor	70	kg		
43					

Variant Codes / Definition
332 = Baldor catalog number
333 = Not for use in the USA

Remarks:
Data based on situation 3/14/2012
All data subject to tolerances in accordance with IEC
Guaranteed values on request



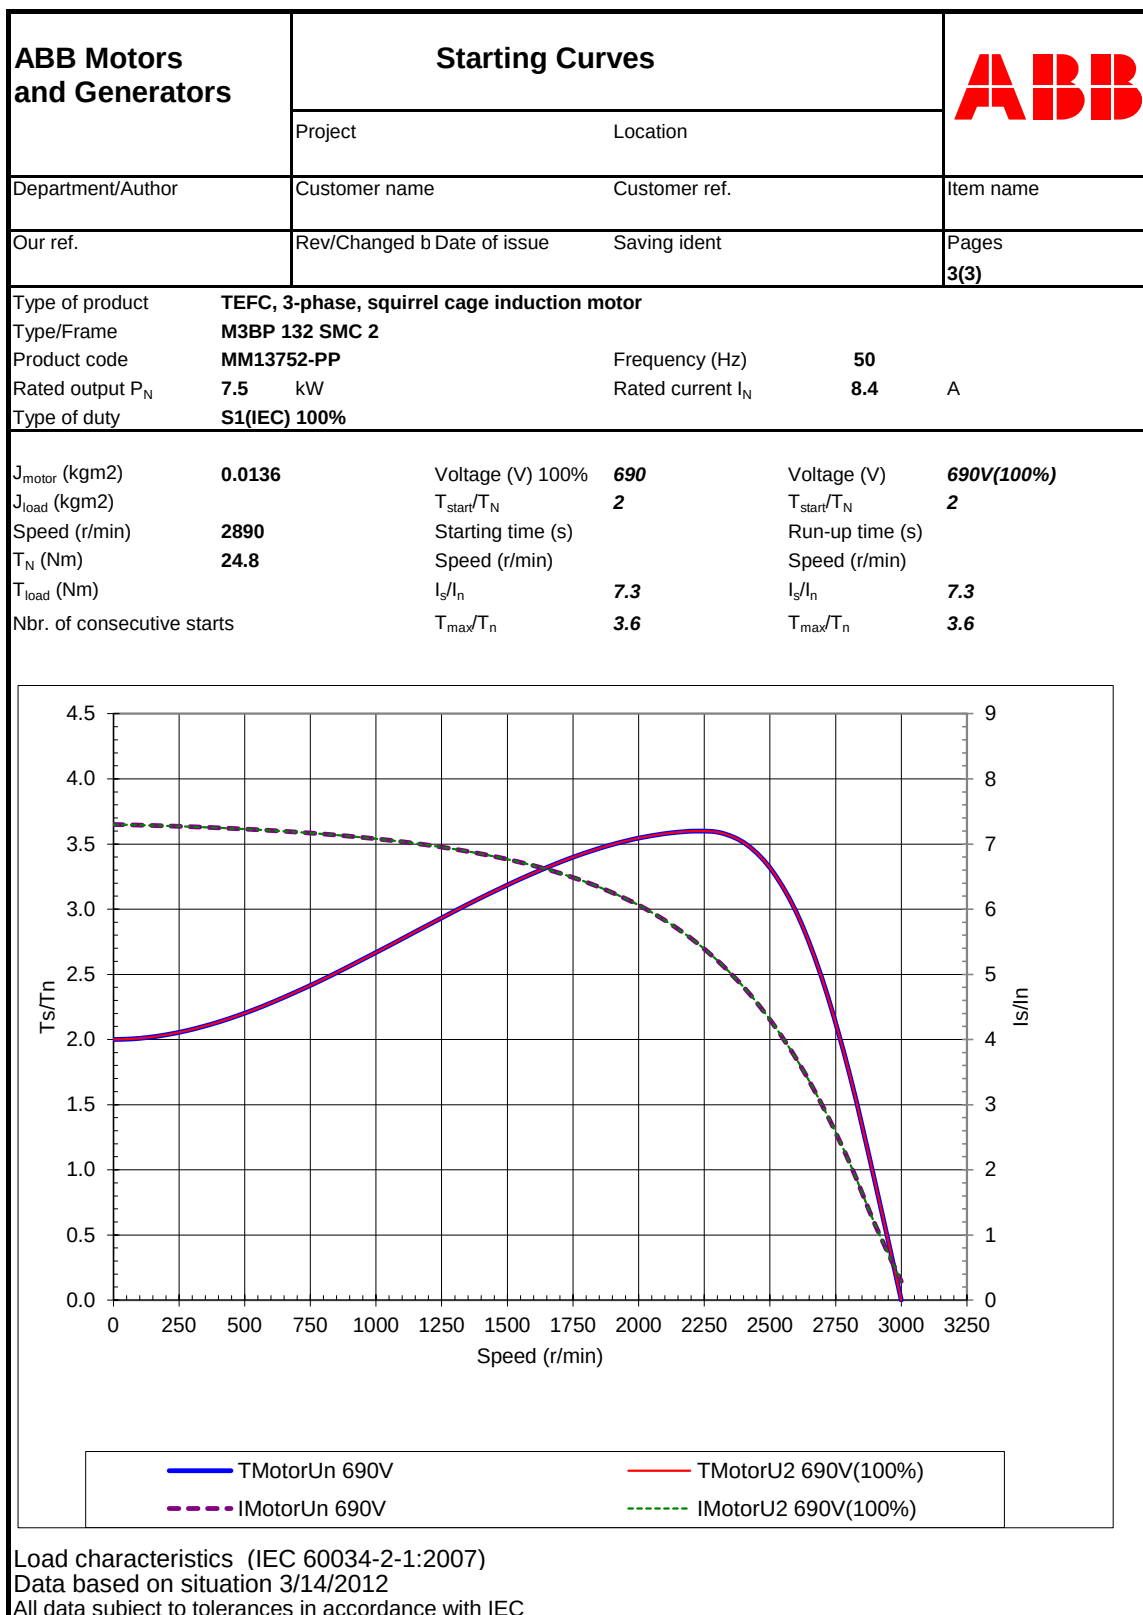


ABB Motors and Generators		Technical Data Sheet - DOL				
		Project		Location		
Department/Author		Customer name		Customer ref.		Item name
Our ref.		Rev/Changed by	Date of issue	Saving ident		Pages 1(3)

No.	Definition	Data	Unit	Remarks	
1	Product	TEFC, 3-phase, squirrel cage induction motor			
2	Product code	MM13752-PP (3GBP131324-ADB+332+333)			
3	Type/Frame	M3BP 132 SMC 2			
4	Mounting	IM1001, B3(foot)			
5	Rated output P _N	7.5	kW		
6	Service factor	1			
7	Type of duty	S1(IEC) 100%			
8	Rated voltage U _N	460	VD	± 5 % (IEC 60034-1)	
9	Rated frequency f _N	60	Hz	± 2 % (IEC 60034-1)	
10	Rated speed n _N	3505	r/min		
11	Rated current I _N	11.9	A		
12	No-load current	3.4	A		
13	Starting current I _s /I _N	8.6		Fullfilled IEC 60034-12 design N,H	
14	Nominal torque T _N	20.4	Nm		
15	Locked rotor torque T _S /T _N	2.2			
16	Maximum torque T _{max} /T _N	4.4			
17	Minimum torque T _{min} /T _N	2.2			
18	Speed at minimum torque	0	r/min		
19	Load characteristics (IEC 60034-2-1:2007)	Load %	Current A	Efficiency %	Power factor
20	PLL determined from residual loss	100	11.9	89.5 / IE2	0.88
21		75	9.3	89.1	0.85
22		50	6.8	86.8	0.79
23		Start	102		0.5
24	Maximum starting time from hot	15	s		
25	Maximum starting time from cold	27	s		
26	Insulation class / Temperature class	F / B			
27	Ambient temperature	40	°C		
28	Altitude	1000	m.a.s.l.		
29	Enclosure	IP55			
30	Cooling system	IC411 self ventilated			
31	Bearing DE/NDE	6208-2Z/C3 - 6208-2Z/C3			
32	Type of Grease	Greased for life			
33	Sound pressure level (LP dB(A) 1m)	77	dB(A)	at load	
34	Moment of inertia J = ¼ GD2	0.01359	kg-m2		
35	Balancing	Half Key			
36	Vibration class	Grade A			
37	Position of terminal box	Top			
38	Terminal box entries; no, dimens.	2xM32x1.5			
39	Number of power terminals	6			
40	Direction of rotation	CW or CCW			
41	Weight of rotor	7	kg		
42	Total weight of motor	70	kg		
43					

Variant Codes / Definition
332 = Baldor catalog number
333 = Not for use in the USA

Remarks:

Data based on situation 3/14/2012
All data subject to tolerances in accordance with IEC
Guaranteed values on request

