

DUTY MASTER ALTERNATING CURRENT MOTORS

SQUIRREL-CAGE INDUCTION
CAST IRON CONSTRUCTION

ENCLOSURE: TOTALLY ENCLOSED
MOUNTING: FOOT

FRAMES 404U-405U

COOLING: FAN COOLED

D

D

C



C

B

B

A

A

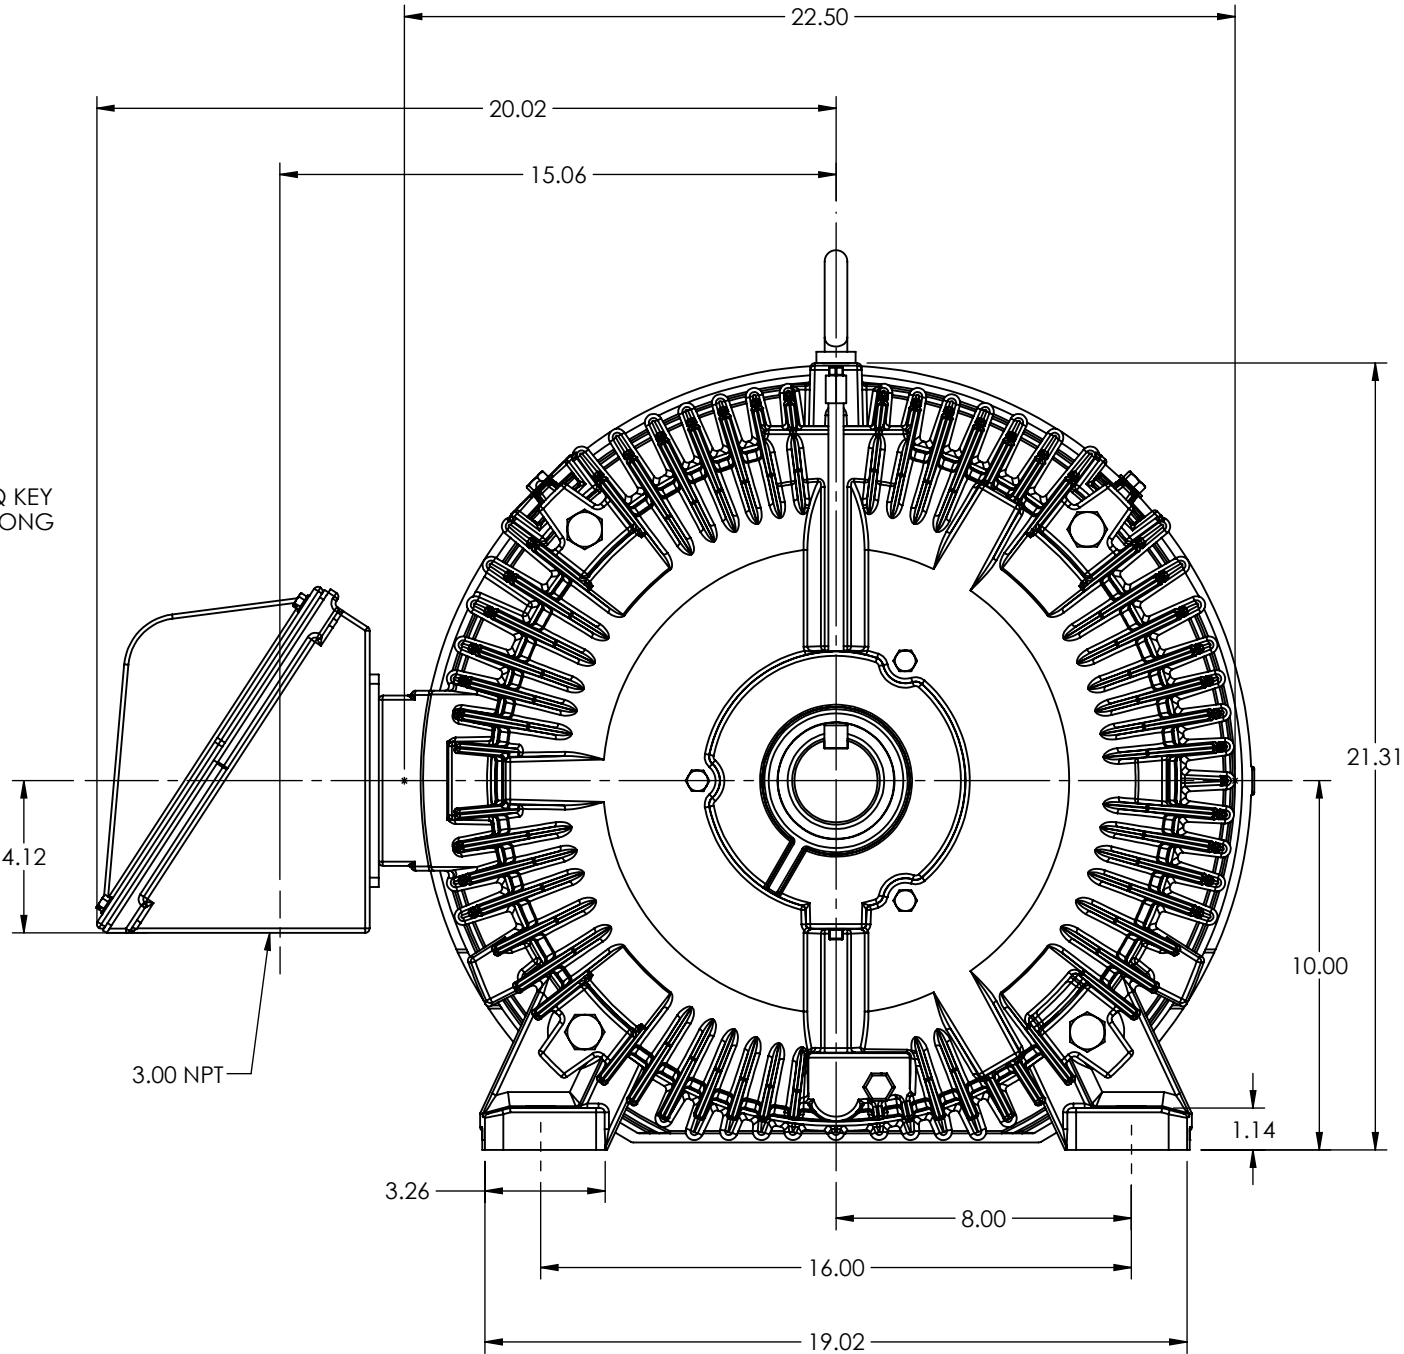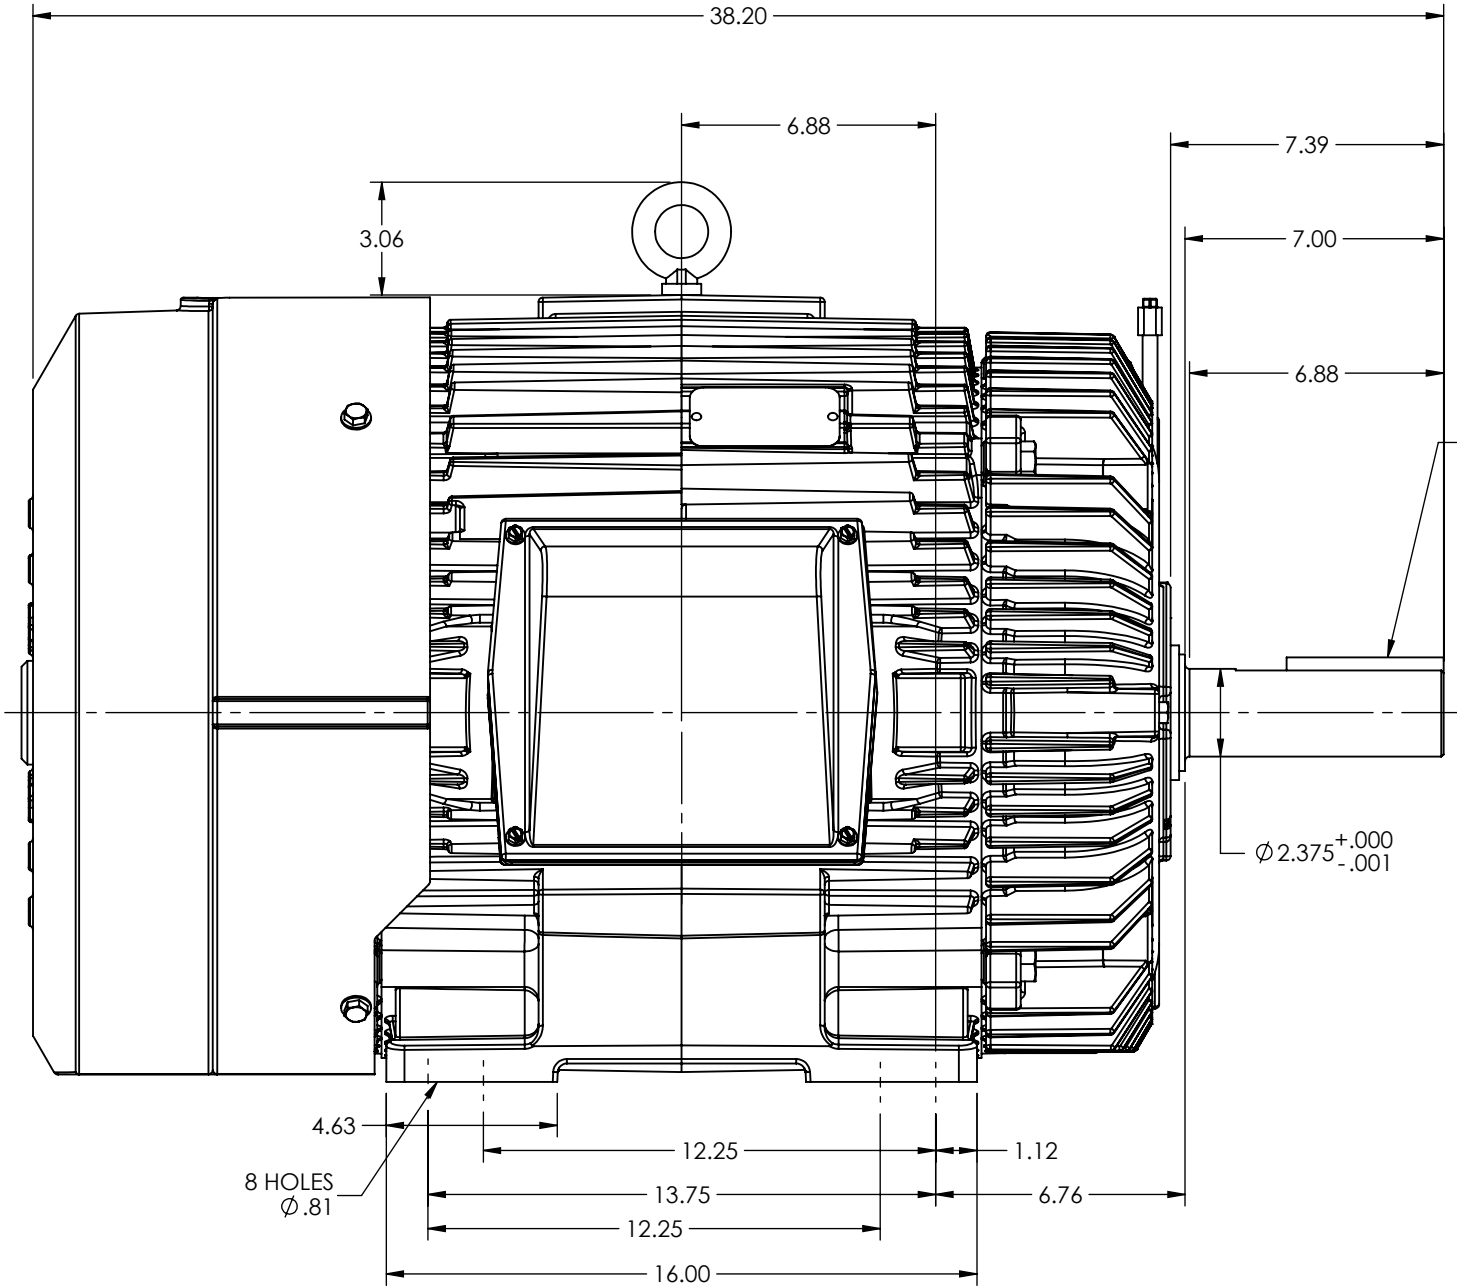

MAXIMUM PERMISSIBLE SHAFT RUNOUT WHEN MEASURED AT END
OF STD. SHAFT EXTENSION IS .002 T.I.R. UP TO AND INCLUDING
1.625 DIA AND .003 T.I.R. 1.625 DIA. TO 5 INCH DIA.

WEIGHT (LBS): 404U = 1220
405U = 1260
MOTOR WEIGHTS MAY VARY BY 15% DEPENDING UPON RATING.

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: ADD MISSING DIMS TO DRAWING			
REV: A	VERSION: 01	REVISED: 12:55:18 07/24/2013	TDR: 000000809954
MODEL NO. 617428-015			REF:
BY: ENALEM0			B

BALDOR

DIM SHT 404-405U, SINGLE EXT XT (611740-531)

617428-015