


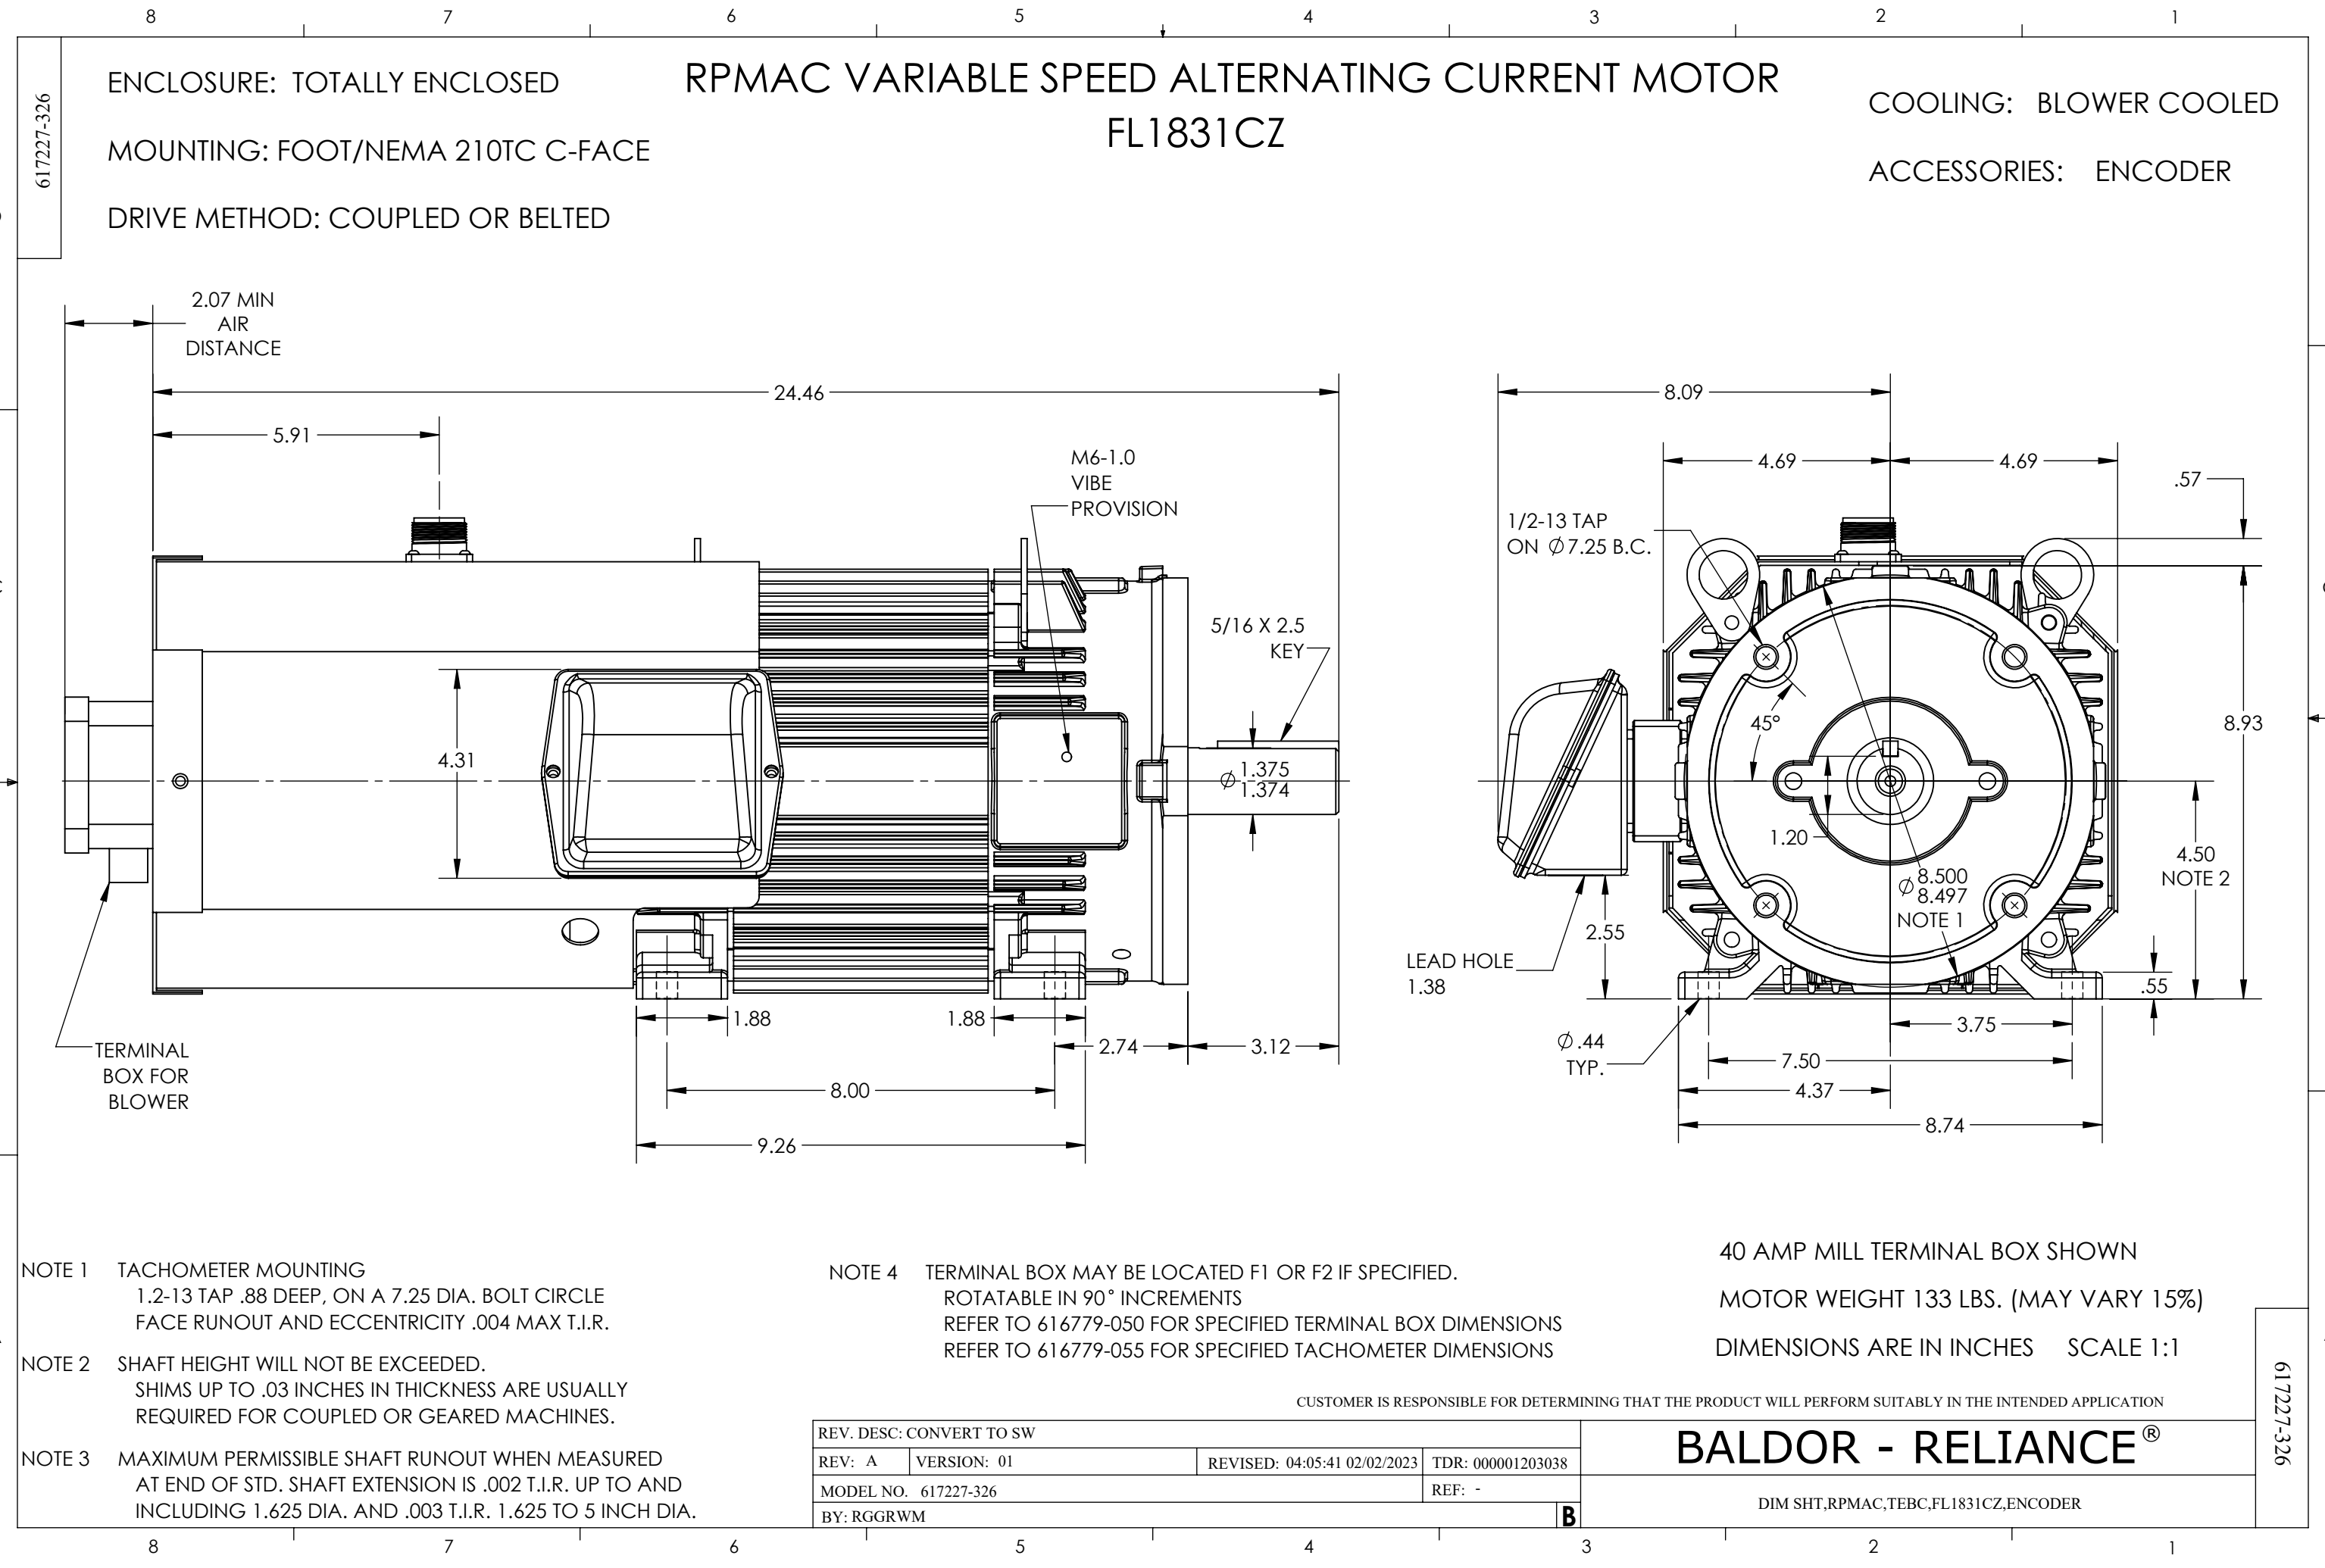

ENCLOSURE: TOTALLY ENCLOSED

MOUNTING: FOOT/NEMA 210TC C-FACE

DRIVE METHOD: COUPLED OR BELTED

RPMAC VARIABLE SPEED ALTERNATING CURRENT MOTOR FL1831CZ

COOLING: BLOWER COOLED

ACCESSORIES: ENCODER

NOTE 1 TACHOMETER MOUNTING
1.2-13 TAP .88 DEEP, ON A 7.25 DIA. BOLT CIRCLE
FACE RUNOUT AND ECCENTRICITY .004 MAX T.I.R.

NOTE 2 SHAFT HEIGHT WILL NOT BE EXCEEDED.
SHIMS UP TO .03 INCHES IN THICKNESS ARE USUALLY
REQUIRED FOR COUPLED OR GEARED MACHINES.

NOTE 3 MAXIMUM PERMISSIBLE SHAFT RUNOUT WHEN MEASURED
AT END OF STD. SHAFT EXTENSION IS .002 T.I.R. UP TO AND
INCLUDING 1.625 DIA. AND .003 T.I.R. 1.625 TO 5 INCH DIA.

NOTE 4 TERMINAL BOX MAY BE LOCATED F1 OR F2 IF SPECIFIED.
ROTATABLE IN 90° INCREMENTS
REFER TO 616779-050 FOR SPECIFIED TERMINAL BOX DIMENSIONS
REFER TO 616779-055 FOR SPECIFIED TACHOMETER DIMENSIONS

40 AMP MILL TERMINAL BOX SHOWN
MOTOR WEIGHT 133 LBS. (MAY VARY 15%)
DIMENSIONS ARE IN INCHES SCALE 1:1

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: CONVERT TO SW			
REV: A	VERSION: 01	REVISED: 04:05:41 02/02/2023	TDR: 000001203038
MODEL NO. 617227-326			REF: -
BY: RGGRWM			B

BALDOR - RELIANCE®

DIM SHT,RPMAC,TEBC,FL1831CZ,ENCODER

617227-326

617227-326