
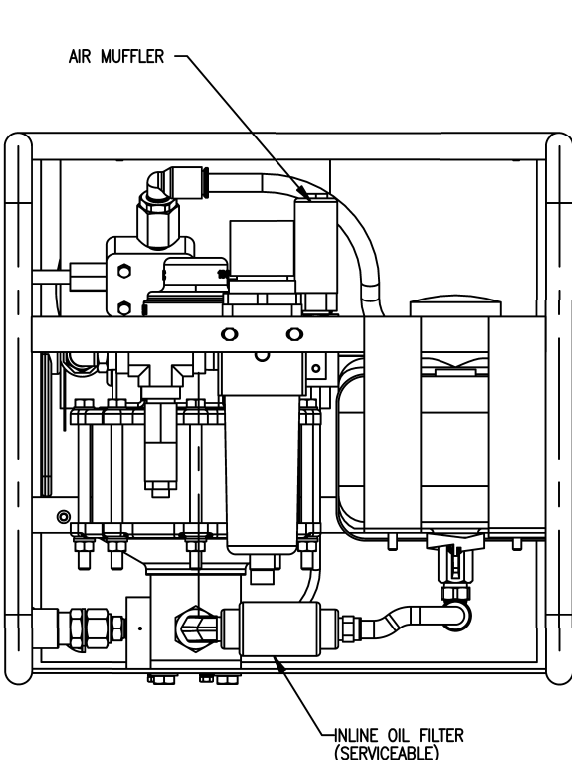
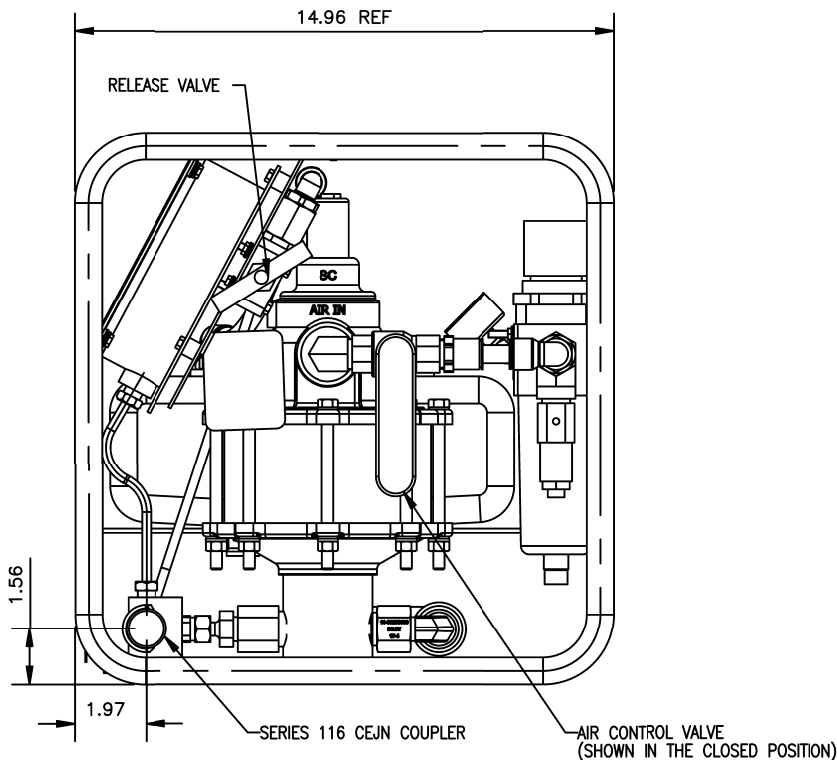
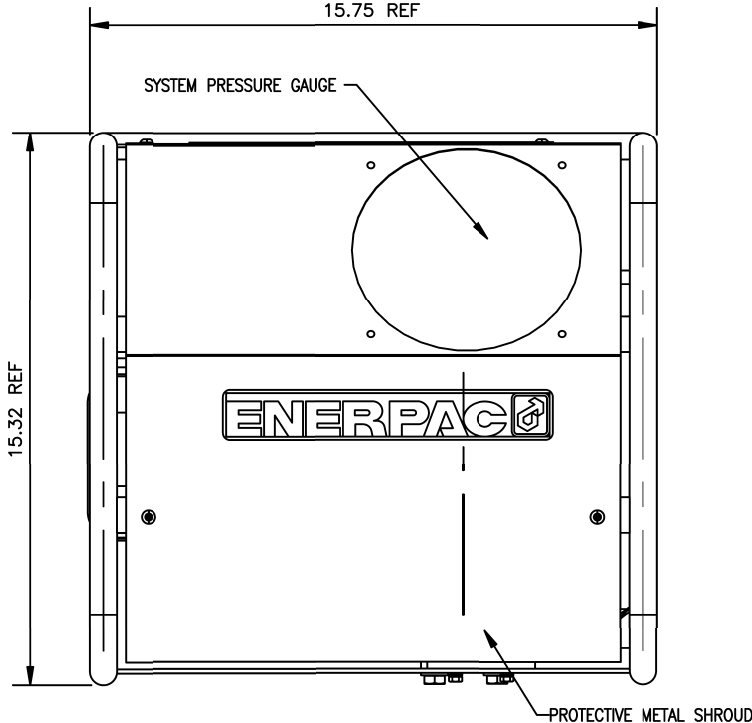


D


C

B

A

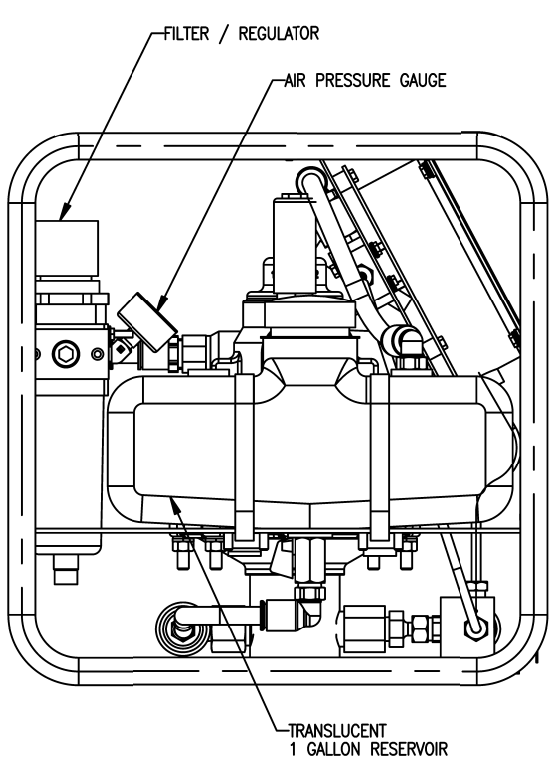

ATP1500 FLOW VS. SYSTEM PRESSURE

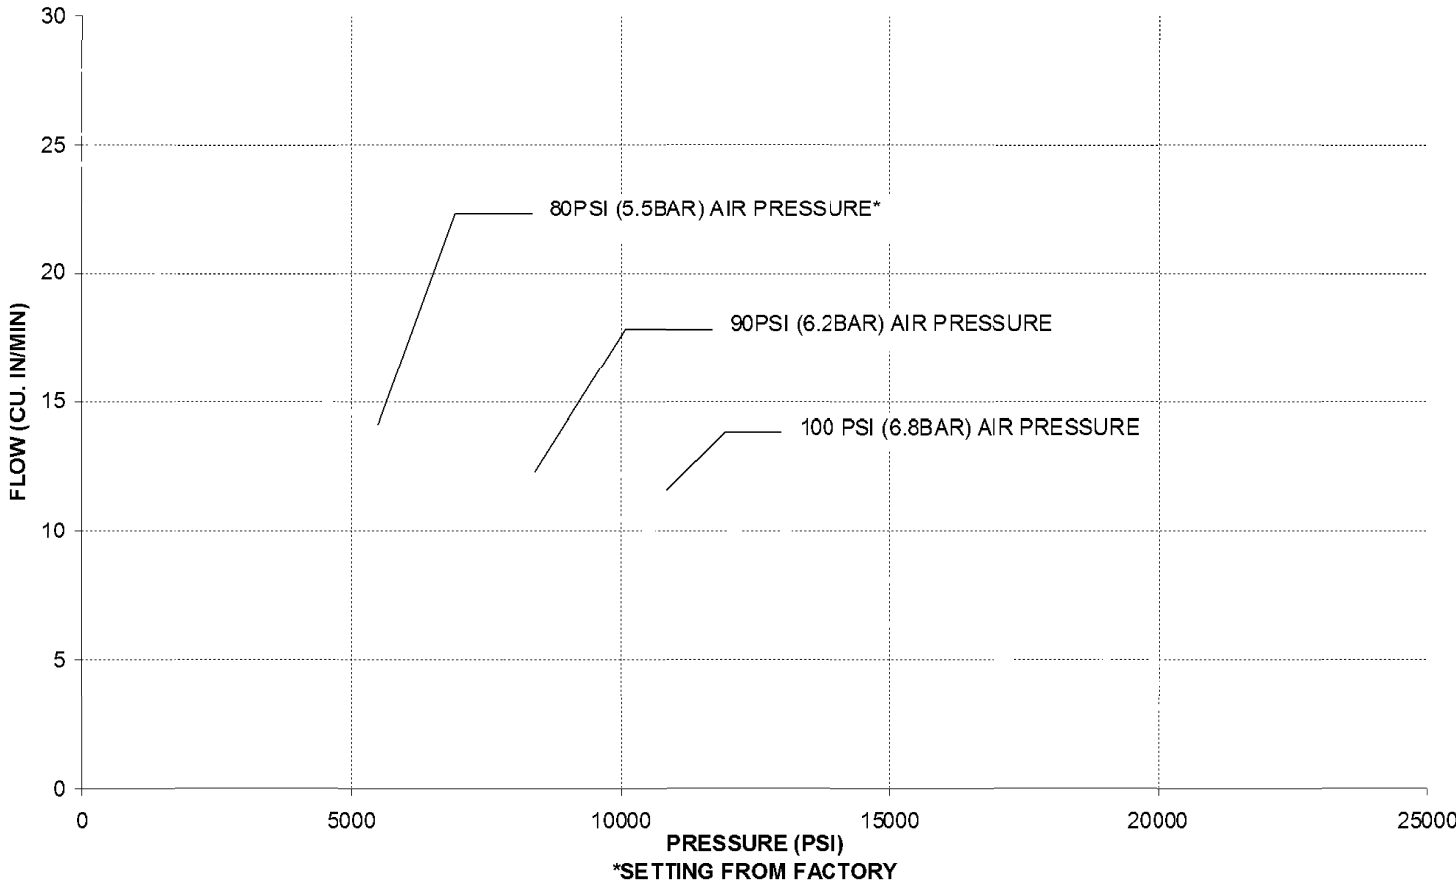

(B)

PRODUCT SPECIFICATIONS	
TEMPERATURE RANGE	-20°- 140°F (-29°- 50°C)
VISCOSITY RANGE	150 - 165 S.U.S (15-25 C.S.T)
HYDRAULIC OIL	150 GRADE 32
SEAL MATERIAL	BUNA , VITON
MAX. PRES STANDARD PUMP	21,755 PSI (1500 BAR)
dBa RATING	84 dBa MAX
MAX. AIR CONSUMPTION	21 SCFM (594 L/M)
WEIGHT WITH OIL	54 LBS (24.5 KG)

(C)

(C)

NOTE:
1. DIMENSIONS ARE FOR REFERENCE ONLY.

THIRD ANGLE PROJECTION

FINISH UNLESS SPECIFIED

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

DECIMALS X.X ±.01
X.XX ±.005
ANGLES ±1°

METRIC X.X ±0.25mm
X.XX ±0.1mm

DO NOT SCALE DRAWING

DRAWN BY: KB

DATE 05-15-08

CHECKER: RRP

DATE 02/07/08

ENGR: RRP

DATE 02/07/08

THIS PRINT AND INFORMATION HEREIN IS
CONFIDENTIAL AND PROPRIETARY AND IS
THE PROPERTY OF ENERPAC. IT IS NOT
TO BE COPIED OR REPRODUCED WITHOUT
WRITTEN PERMISSION.

DATE

05-15-08

APPROVALS

DATE

02/07/08

SIZE D

DWG NO. ID10926

SCALE 3:8

DWG FORMAT Pro/E

SHEET 1 of 1

FILL NO.

ENERPAC

720 WEST JAMES STREET
COLUMBUS, WI. 53925

TITLE

AIR PUMP ASSEMBLY
(HYDRATIGHT)