


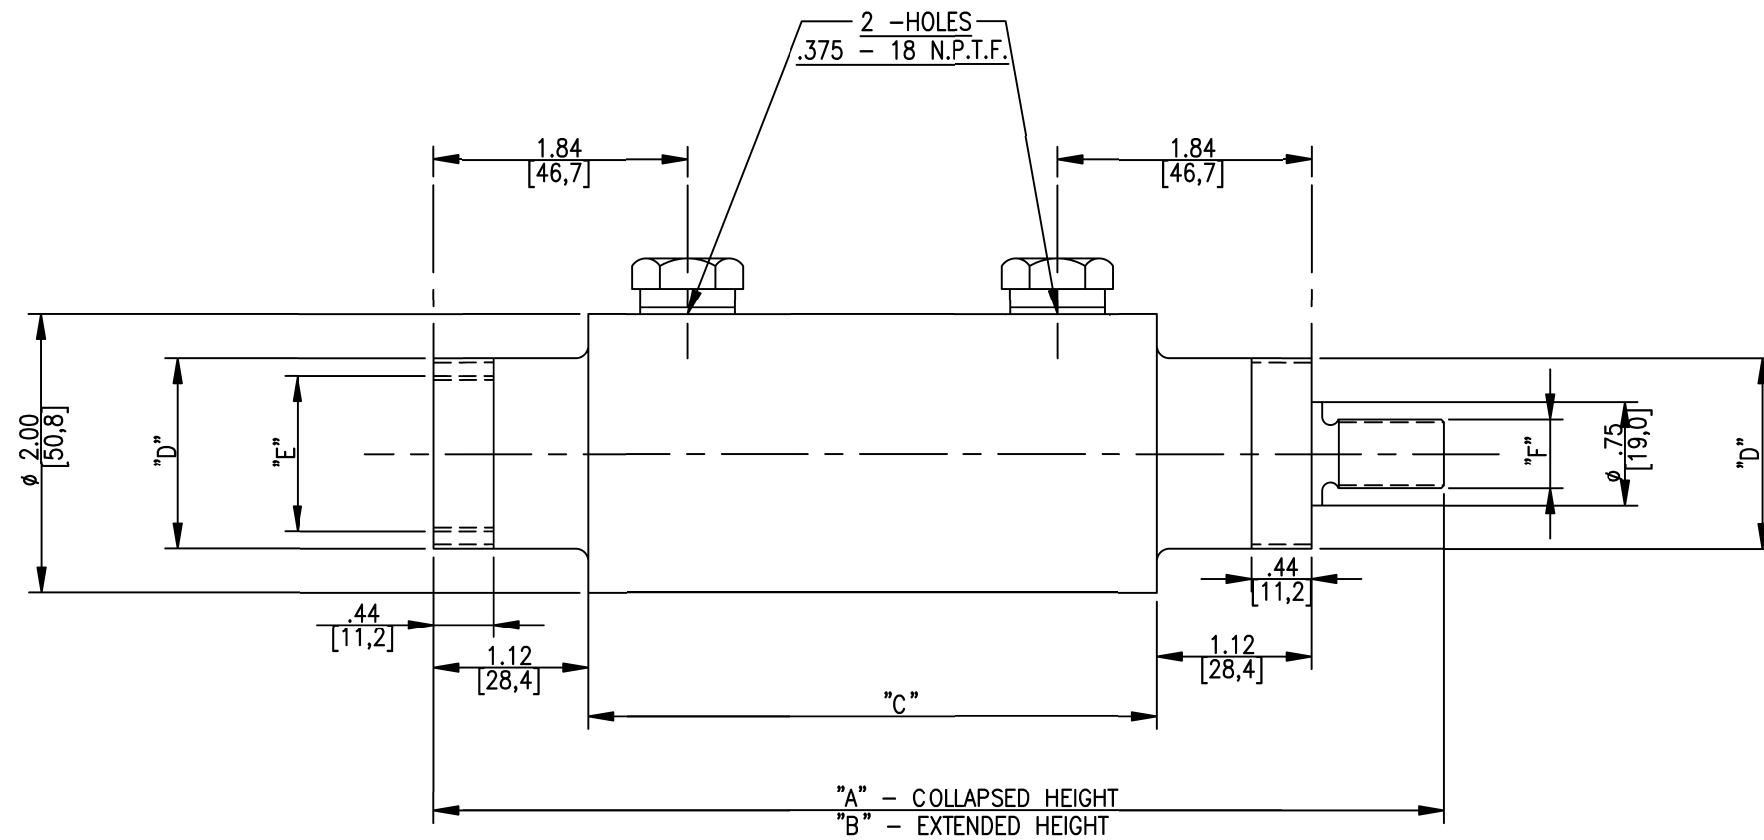

MODEL NUMBER	"A"	"B"	"C"	"D"	"E"	"F"
RD 41	7.31 [185,7]	8.44 [214,4]	4.13 [104,9]	1.375-12 UNF-2A	1.125-12 UNF-2B	.500-20 UNF-2A
RD 43	9.31 [236,5]	12.44 [316,0]	6.16 [156,5]	1.375-12 UNF-2A	1.125-12 UNF-2B	.500-20 UNF-2A
RD 46	12.31 [312,7]	18.44 [468,4]	9.16[232,7]	1.375-12 UNF-2A	1.125-12 UNF-2B	.500-20 UNF-2A
BRD 41	7.31 [185,7]	8.44 [214,4]	4.13 [104,9]	M42 X 1,5 6g	M30 X 1,5 6H	M16 X 1,5 6g
BRD 43	9.31 [236,5]	12.44 [316,0]	6.16 [156,5]	M42 X 1,5 6g	M30 X 1,5 6H	M16 X 1,5 6g
BRD 46	12.31 [312,7]	18.44 [468,4]	9.16[232,7]	M42 X 1,5 6g	M30 X 1,5 6H	M16 X 1,5 6g

MODEL NUMBER	ADV. OIL CAP	RET. OIL CAP	STROKE	WEIGHT
RD 41	.90 CU. IN./[14,75 CU.CM.]	.40 CU. IN./[6,55 CU.CM.]	1.13 IN. [28,70]	4.8 LBS./[2,18 KG.]
RD 43	2.40 CU.IN./[39,33 CU.CM.]	1.10 CU.IN./[18,02 CU.CM.]	3.13 IN. [79,50]	6.4 LBS./[2,90 KG.]
RD 46	4.80 CU.IN./[78,66 CU.CM.]	2.10 CU.IN./[34,41 CU.CM.]	6.13 IN. [155,70]	9 LBS./[4,08 KG.]
BRD 41	.90 CU. IN./[14,75 CU.CM.]	.40 CU. IN./[6,55 CU.CM.]	1.13 IN. [28,70]	4.8 LBS./[2,18 KG.]
BRD 43	2.40 CU.IN./[39,33 CU.CM.]	1.10 CU.IN./[18,02 CU.CM.]	3.13 IN. [79,50]	6.4 LBS./[2,90 KG.]
BRD 46	4.80 CU.IN./[78,66 CU.CM.]	2.10 CU.IN./[34,41 CU.CM.]	6.13 IN. [155,70]	9 LBS./[4,08 KG.]

SPECIFICATION NOTES

EFFECTIVE AREA PUSH - .785 SQ.IN./[5,07 SQ.CM.]
EFFECTIVE AREA PULL - .344 SQ.IN./[2,22 SQ.CM.]
FORCE PUSH - 7,850 LBS./[3,560 KG.]
FORCE PULL - 3,440 LBS./[1560 KG.]
INTERNAL PRESSURE AT RATED CAPACITY PUSH-10,000 PSI/700 BAR
INTERNAL PRESSURE AT RATED CAPACITY PULL-10,000 PSI/700 BAR
BORE DIAMETER - 1.00 IN. / [25,4]

ECO	DATE	DIMENSIONS IN BRACKETS ARE IN [mm]		ENERPAC	13000 WEST SILVER SPRING DR. BUTLER, WISCONSIN 53007	
	CHANGES	Specification Sheet			DESCRIPTION DOUBLE ACTING CYL. 4 TON	
	MODEL NO.	SEE CHART			DR.	DATE
	DATE	DATE			DRAWING NO.	9/93

ECO

DATE

CHANGES

MODEL NO.

DATE

DRAWING NO.

9/93