
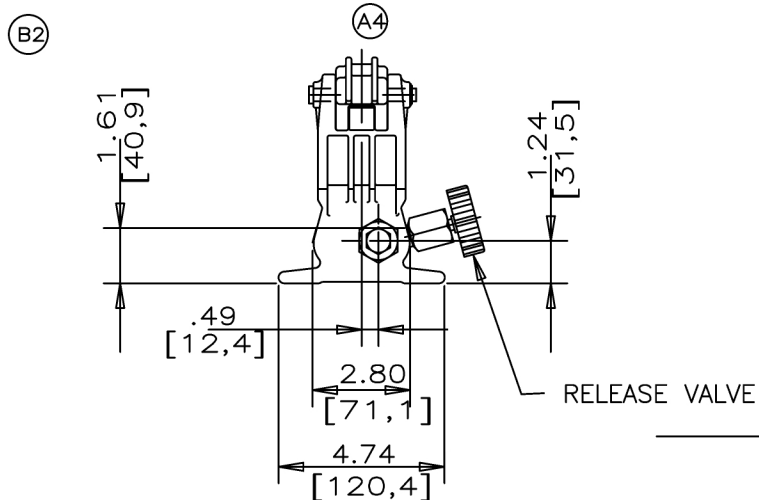


USEABLE OIL CAPACITY: 60 CU. IN. [983,2 CM³] (A1)
 OIL VOLUME/STROKE: 1ST. STAGE .990 IN³ [16,22 CM³]
 2ND. STAGE .037 IN³ [0,61 CM³]
 PRESSURE RATE: 1ST. STAGE 200 PSI [13,8 BAR]
 2ND. STAGE 40,000 PSI [2758,6 BAR]
 PISTON AREA: 1ST. STAGE .990 IN² [6,39 CM²]
 2ND. STAGE .037 IN² [0,24 CM²]
 PISTON STROKE: 1.00 IN [25,4 MM]
 PISTON DIAMETER: 1ST. STAGE 1.123 IN [28,52 MM]
 2ND. STAGE .218 IN [5,54 MM]
 OIL CAPACITY: 63.5 IN³ [1040,6 CM³] (A2)
 WEIGHT: 14 LBS. [6,4 KG]
 40,000 PSI [2758,6 BAR] USE SPECIAL
 (B3) PRESSURE PORT: 40,000 PSI [2758,6 BAR] FITTING.
 .750-16 UNF-2B THREAD

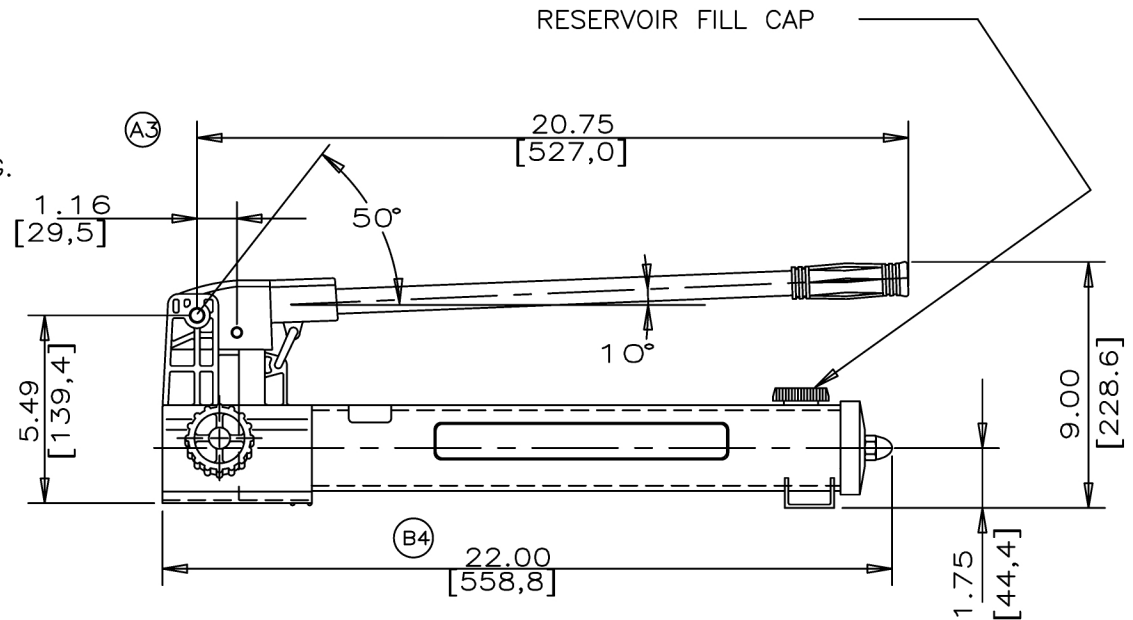

E19629 CHC."B" CM 11-91 E19381 CHC."A" JHG 6/91 PRH89002 RELEASED 10-10-90	DATE	DIMMENSIONS IN BRACKETS ARE IN [mm]		ENERPAC. 		13000 WEST SILVER SPRING DR. BUTLER, WISCONSIN 53007		
	CHANGES	Specification Sheet					DESCRIPTION HAND PUMP	
	ECO	MODEL NO. P-2282			DR. GJK	DATE 10-2-90	DRAWING NO. ID3469	D1107 P
					CH. GJB	DATE 11-12-90		