

ENERPAC

Specification Sheet

DATE 12-20-79

PRODUCT DESCRIPTION DOUBLE ACTING PUMP

A6

ENERPAC, BUTLER, WISCONSIN 53007 TELEPHONE (414) 781 6000 TELEX 096 662 DIVISION OF APPLIED POWER INDUSTRIES, INC.

DOUBLE ACTING PUMP

SPECIFICATIONS

1. WORKING PRESSURE MAX. ~ 2500 PSI (~17,237 KN/m²)

2. PISTON AREA ~ .371 SQ. IN. (2.39 CM²)

3. TOTAL PISTON STROKE ~ 1.50 IN. (38.1 MM)

4. HANDLE EFFORT AT MAX. PRESSURE ~ 60.0 LBS. (27.22 Kg)

5. RELIEF VALVE SETTING ~ 2500 - 2800 PSI (17,237 - 19,305 KN/m²)


6. RESERVOIR CAPACITY

CLOSED ~ 14 CU. IN. (1,868 CU. CM)

VENTED ~ 231 CU. IN. (3,785 CU. CM)

7. WEIGHT WITH 114 CU. IN. OF OIL, 27 LBS. 12.25 Kg

8. DISPLACEMENT PER STROKE .557 CU. IN. 9.13 CU. CM

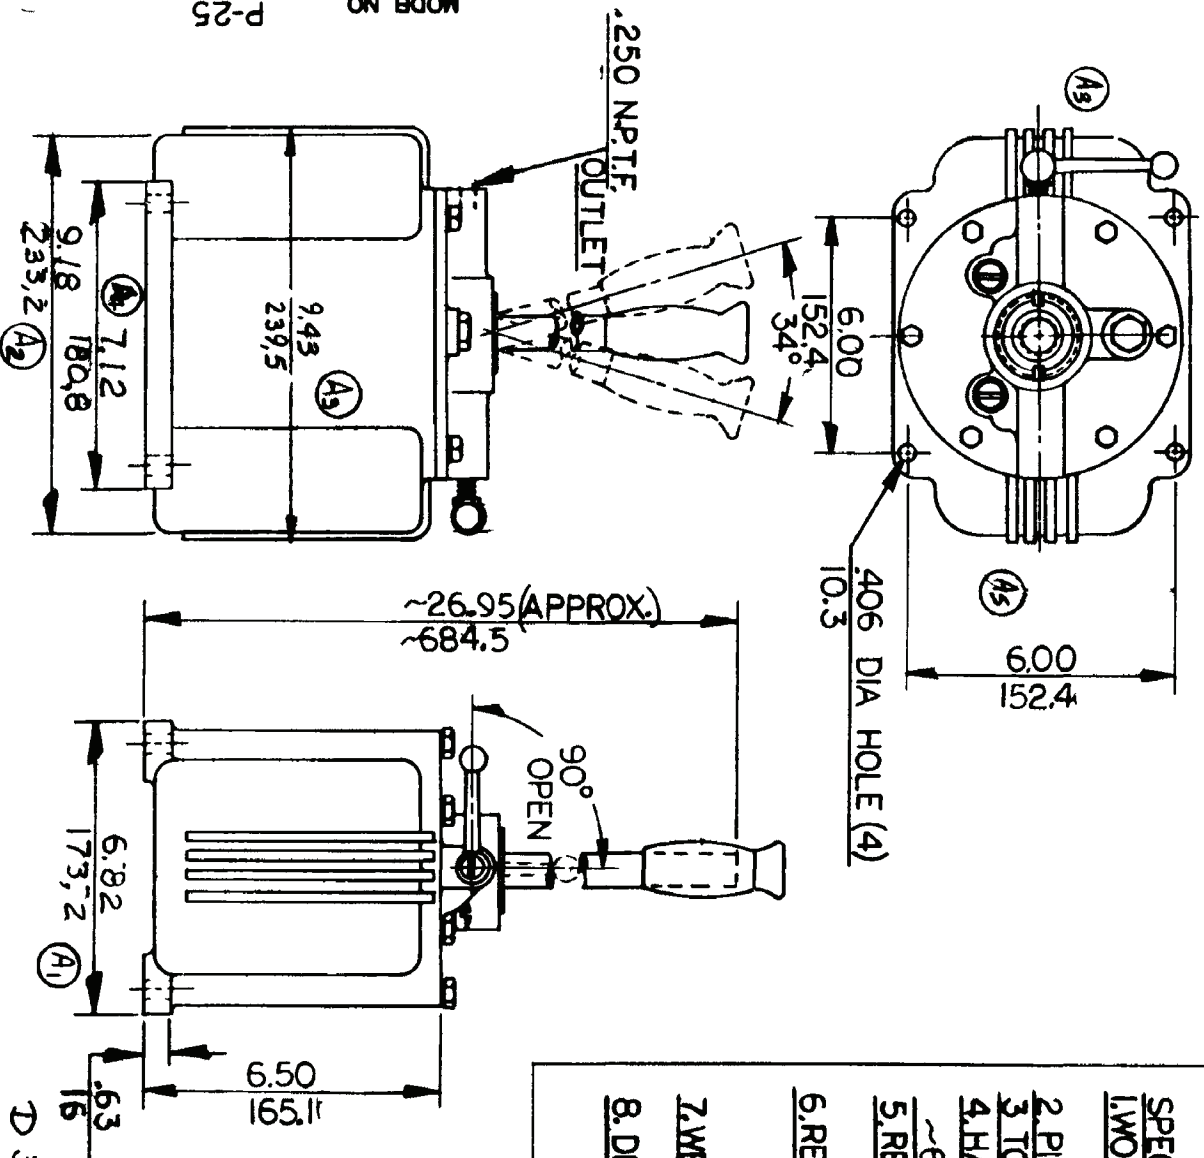

INCHES
MILLIMETERS

A E17162 2-9-89

ID NO. 1718

34945

MODEL NO P-25