




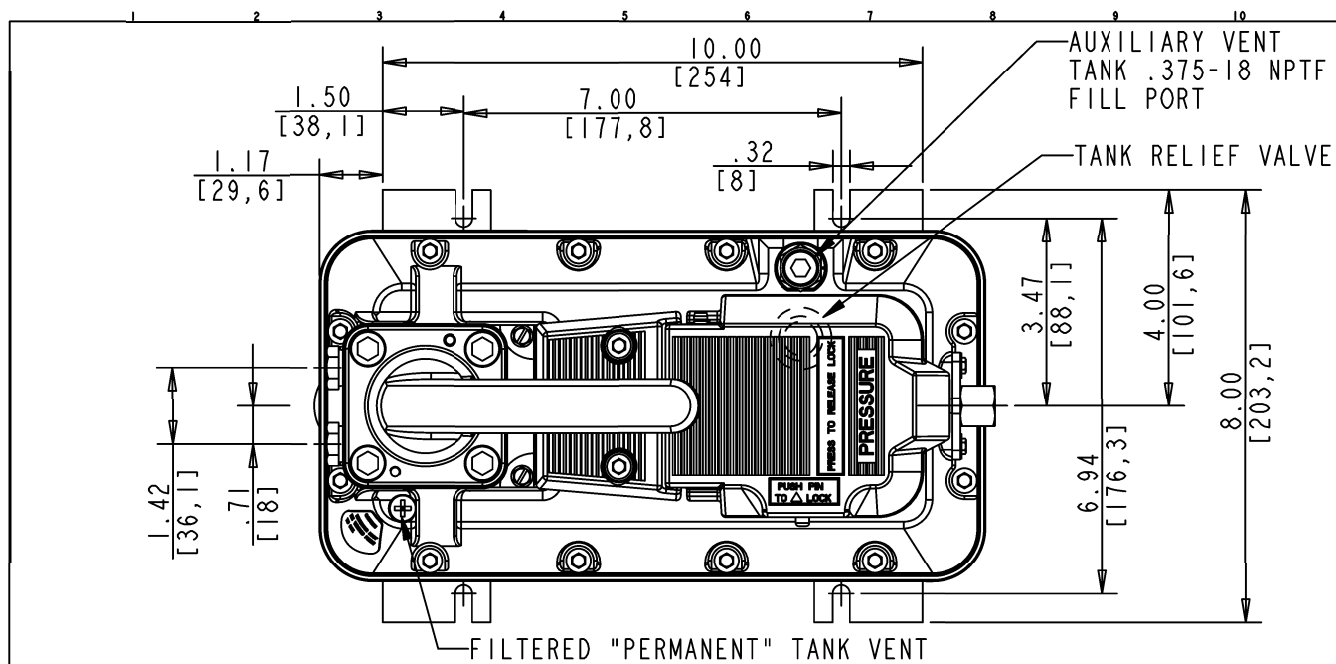




FOR MODELS PAMG5402N / PAMG5402NB PORTS A AND B:
 .375-18 NPTF HYDRAULIC OUTLETS
 FOR MODELS PAMG5402P / PAMG5402PB PORTS A AND B:
 G .250-19 BSPP HYDRAULIC OUTLET.

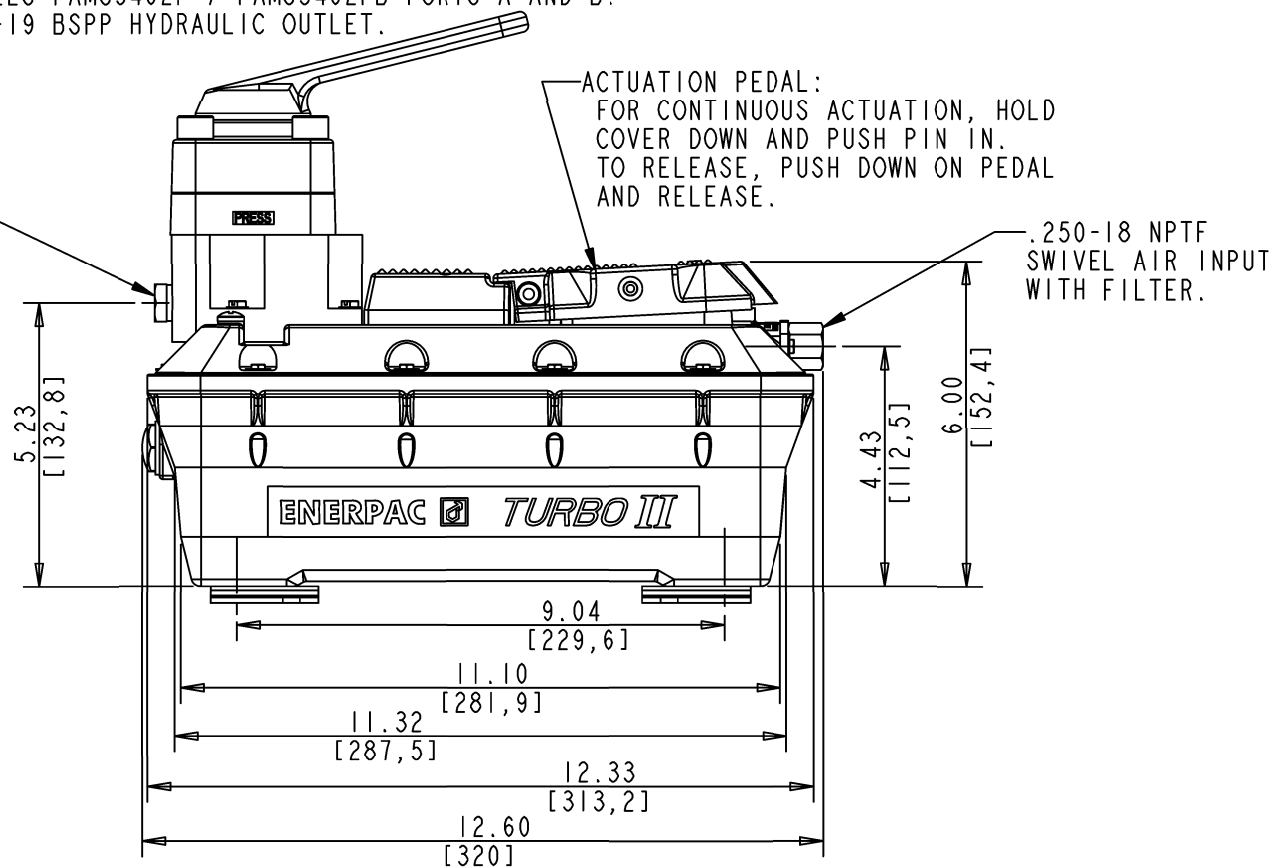

WEIGHT: 20 LBS. [9,1 Kg]
 WEIGHT WITH MOUNTING BRACKET: 21 LBS. [9,5 Kg]
 USABLE OIL CAPACITY: 127 CU. IN. [2,1L]
 RESERVOIR CAPACITY: 150 CU. IN. [2,5L]
 RELIEF VALVE SETTING: 5,200-5,700 PSI [358,6-393,1 BAR] (35.86-39.31 MPa)
 AIR CONSUMPTION: 12 SCFM [340 L/MIN.] @ 75 PSI [5,2 BAR] (0.52 MPa)
 AIR PRESSURE OPERATING RANGE: 25-125 PSI [1,72-8,62 BAR] (0.17-0.86 MPa)
 SOUND LEVEL: TYPICAL 76 DBA

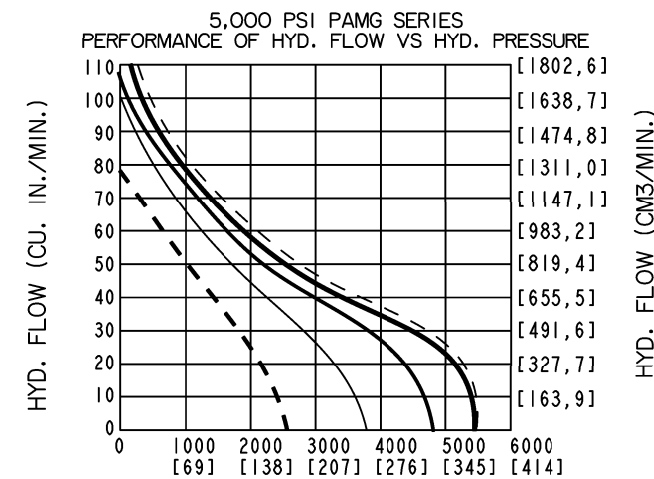

TYPICAL STALL TO RESTART PRESSURE DROP AND AIR PRESSURE VS HYDRAULIC PRESSURE.

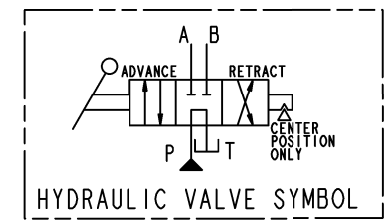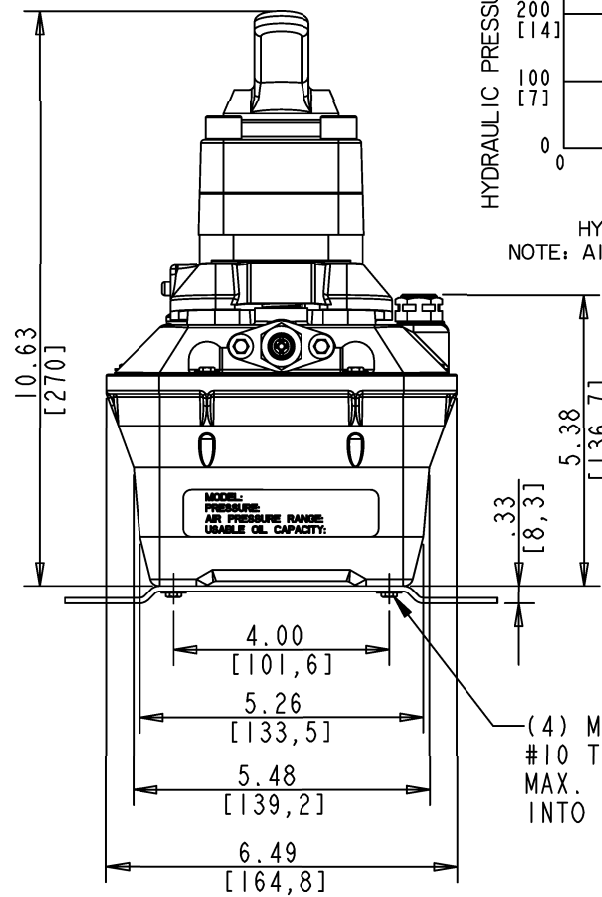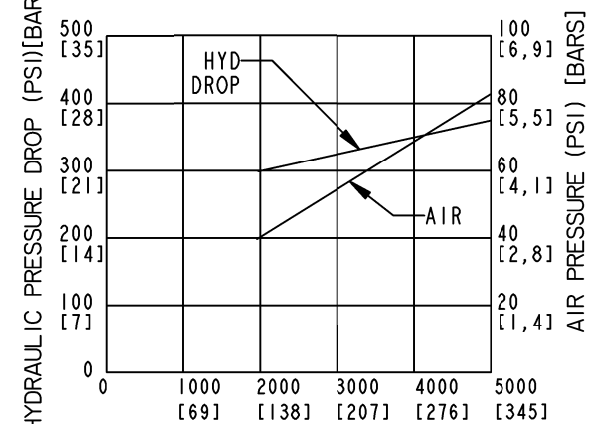

(4) MTG. HOLES FOR
 #10 THREAD FORMING SCREW
 MAX. ENGAGEMENT LENGTH
 INTO RESERVOIR - .75 IN. [19,1MM]

0012015	A	4-9-01/PLS	DATE	DIMENSIONS IN BRACKETS ARE IN [mm]		ENERPAC. 		
			CHANGES	Specification Sheet			DESCRIPTION	TURBO II 2 LT.
				Pro/E CONTROLLED DRAWING				
			ECO	MODEL NO.	DR. PLS	DATE 3-09-01	DRAWING NO.	1/97
				5,000 PSI PAMG SERIES	CH. DAL	DATE 3-14-01	ID10627	C