



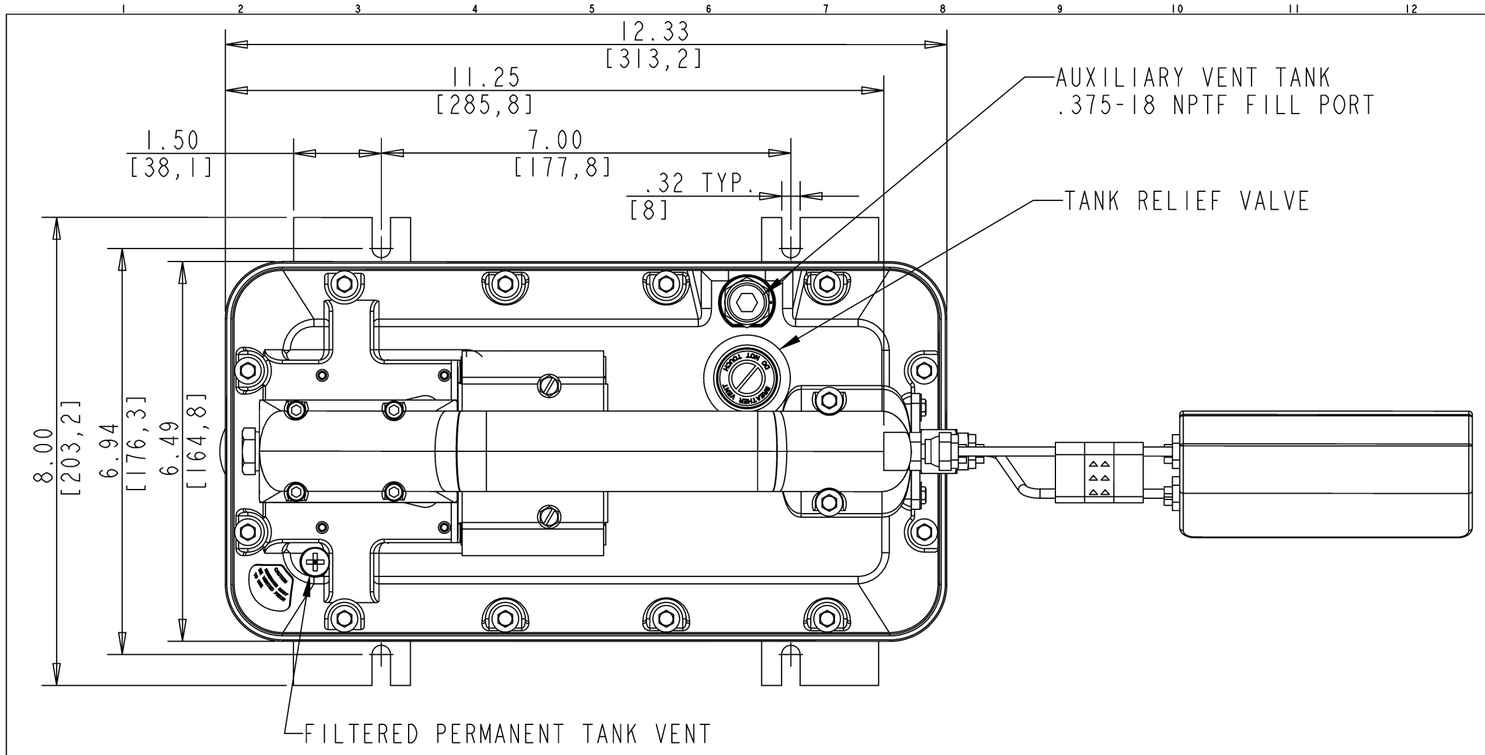


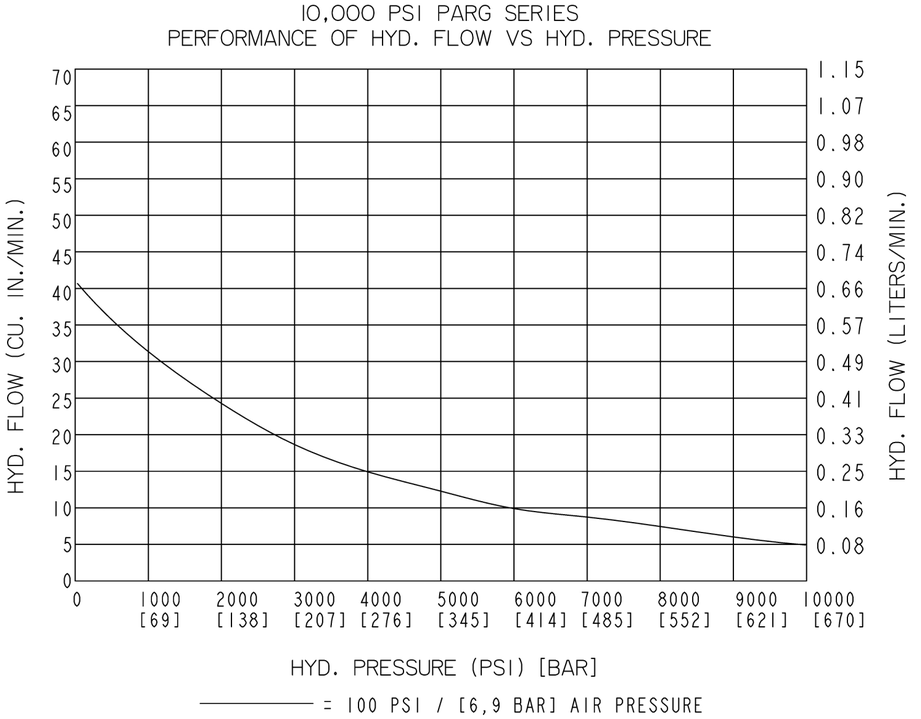

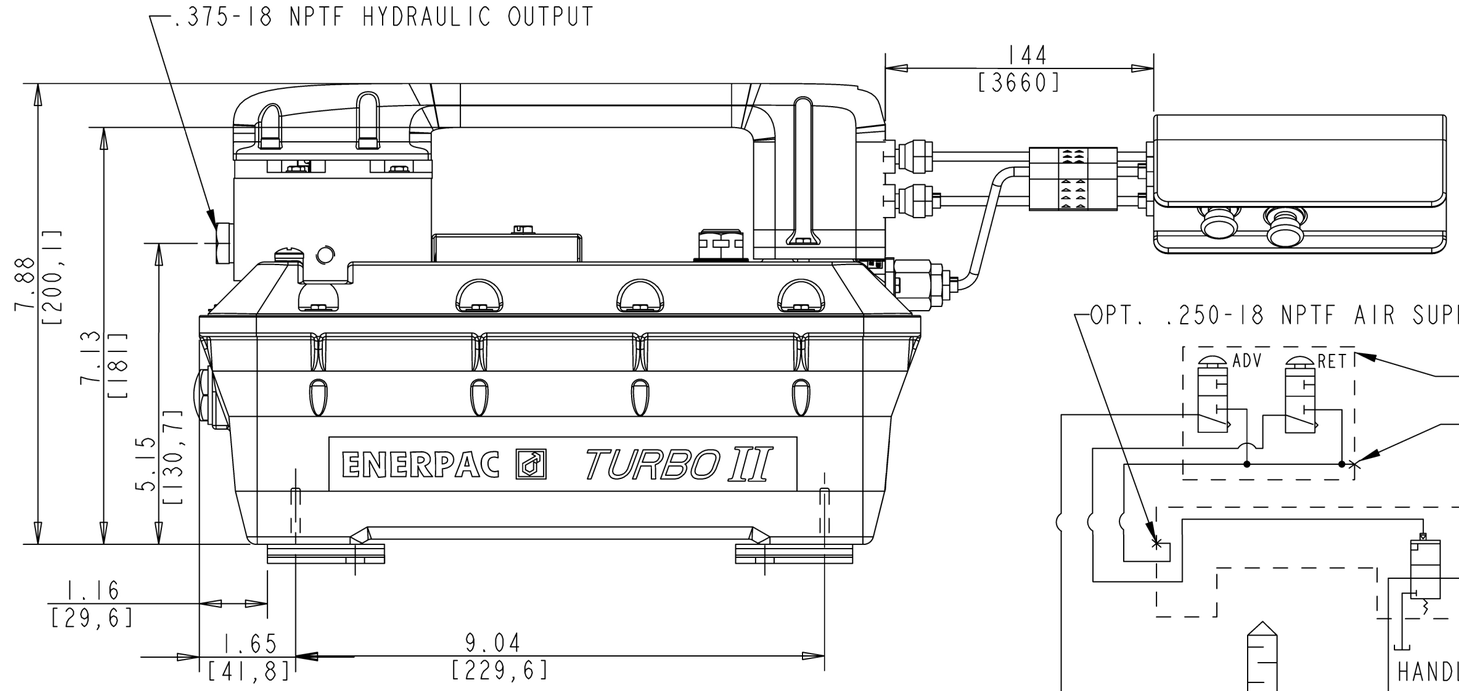

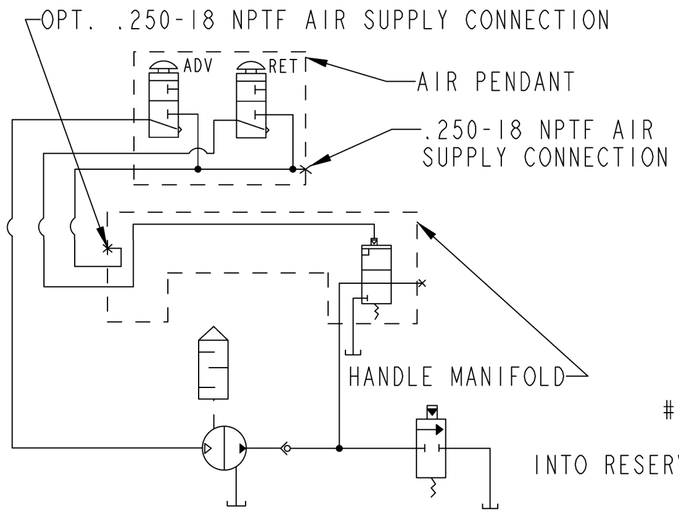

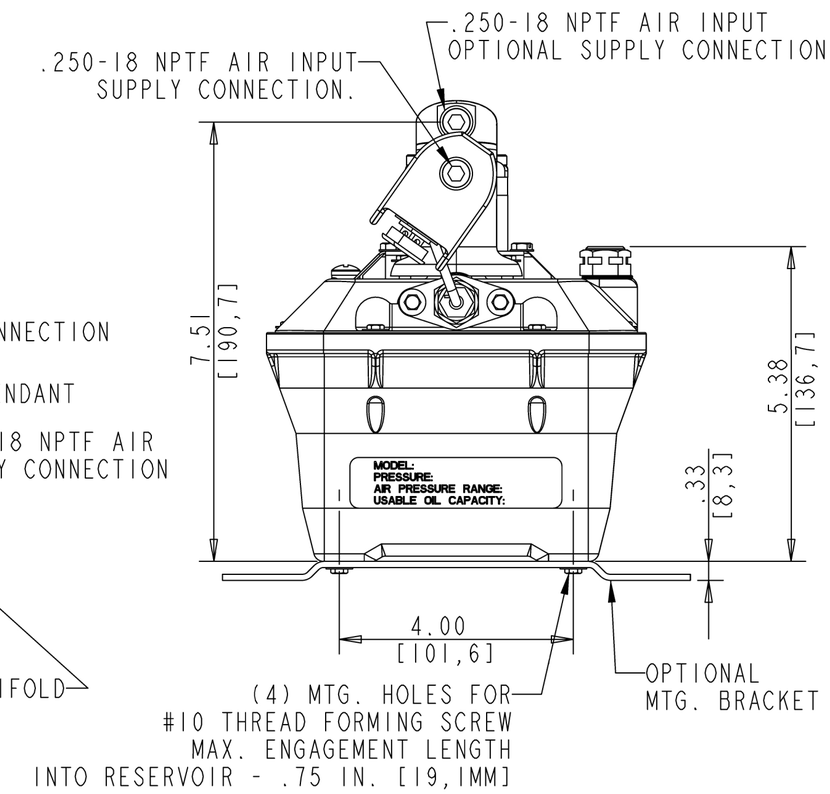

WEIGHT: 20 LBS. [9,1 Kg]
WEIGHT WITH MOUNTING BRACKET 21 LBS. [9,5Kg]
USABLE OIL CAPACITY: 127 CU. IN. [2,1L]
RESERVOIR CAPACITY: 150 CU. IN. [2,5L]
RELIEF VALVE SETTING: 10,400-10,900 PSI [717,24-751,72 BAR](71.72-75.12 MPa)
AIR CONSUMPTION: 12 SCFM [340 L/MIN.] @ 75 PSI [5,2 BAR] (0.52 MPa)
AIR PRESSURE OPERATING RANGE: 25-125 PSI [1,72-8,62 BAR] (0.17-0.86 MPa)
SOUND LEVEL: TYPICAL 76 DBA

001 2015 A 4-9-01/PLS	DATE	DIMENSIONS IN BRACKETS ARE IN [mm]	ENERPAC		
	CHANGES	Specification Sheet Pro/E CONTROLLED DRAWING		DESCRIPTION	TURBO II 2 LT.
	ECO	MODEL NO.	DR. PLS DATE 3-15-01	DRAWING NO.	1/97
		10,000 PSI PARG SERIES	CH. DAL DATE 3-16-01	ID10629	C