





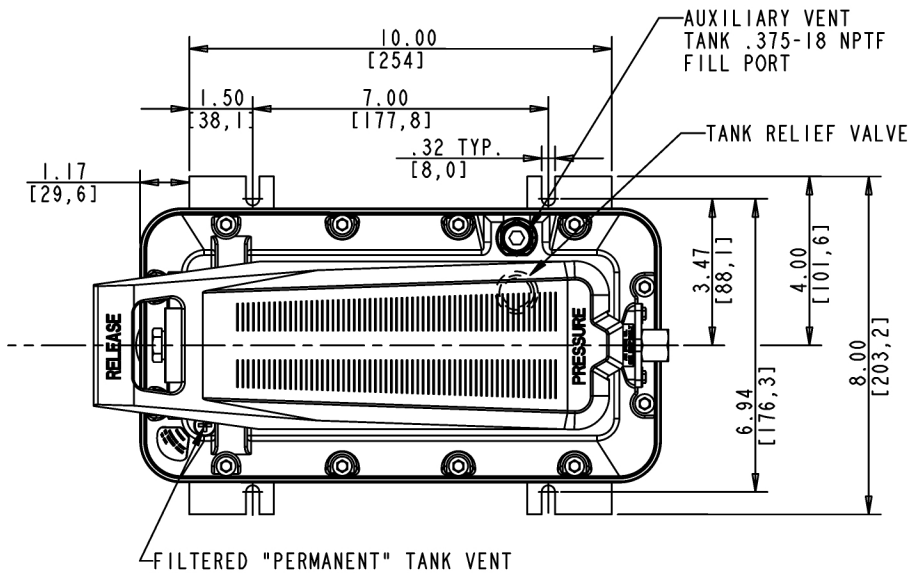


FOR MODELS PATG1102N / PATG1102NB = .375-18 NPTF HYDRAULIC OUTLET
FOR MODELS PATG1102P / PATG1102PB = G .250-19 BSPP HYDRAULIC OUTLET

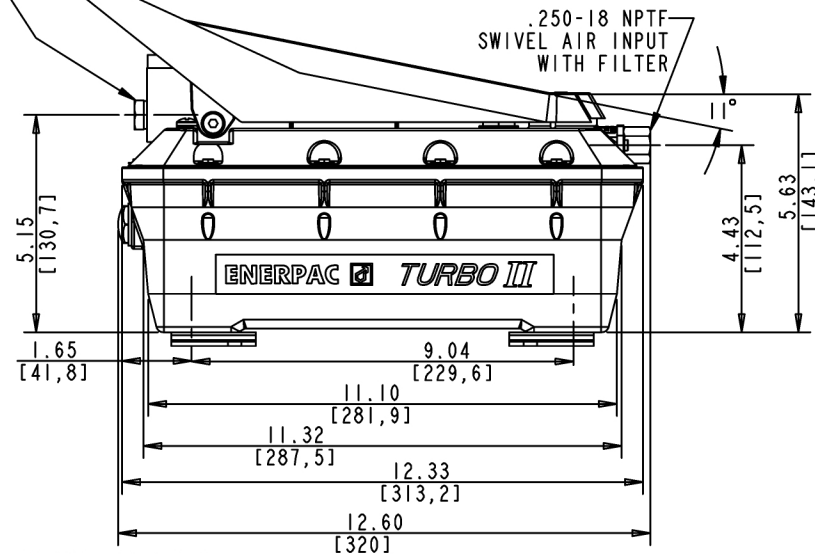

WEIGHT: 16 LBS. [7,3 Kg]
WEIGHT WITH MOUNTING BRACKET: 17 LBS. [7,7 Kg]
USABLE OIL CAPACITY: 127 CU. IN. [2,1L]
RESERVOIR CAPACITY: 150 CU. IN. [2,5L]
RELIEF VALVE SETTING: 10,400-10,900 PSI [717,24-751,72 BAR] (71.72-75.12 MPa)
AIR CONSUMPTION: 12 SCFM [340 L/MIN.] @ 75 PSI [5,2 BAR] (0.52 MPa)
AIR PRESSURE OPERATING RANGE: 25-125 PSI [1,72-8,62 BAR] (0.17-0.86 MPa)
SOUND LEVEL: TYPICAL 76 DBA

10,000 PSI PATG SERIES
PERFORMANCE OF HYD. FLOW VS HYD. PRESSURE

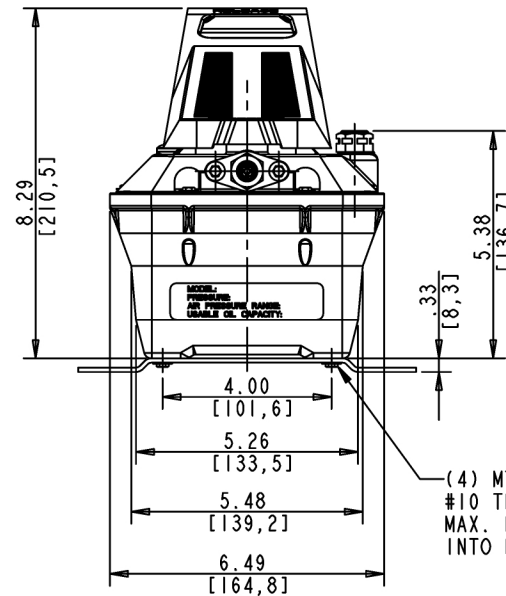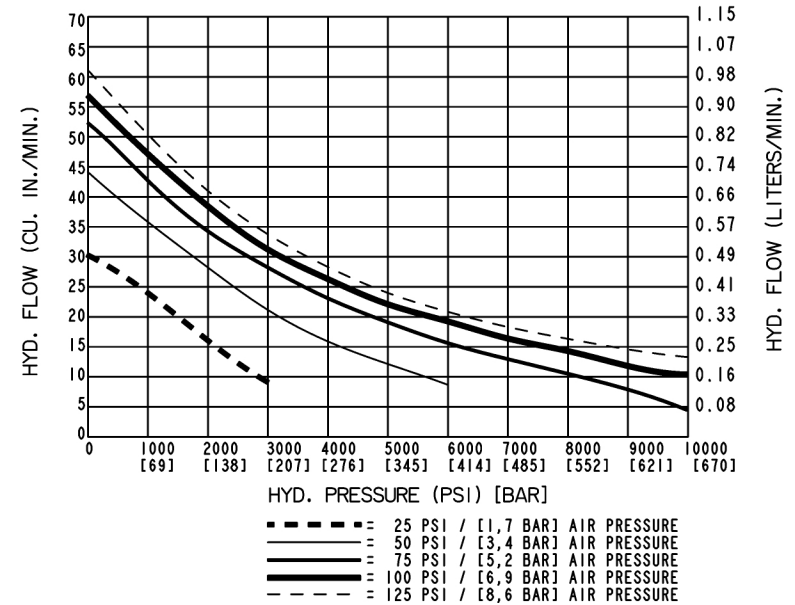

ECO	CHANGES	DATE	DIMENSIONS IN BRACKETS ARE IN [mm]		ENERPAC.	
001205	A	4-4-01/PLS	Specification Sheet		DESCRIPTION	
			Pro/E CONTROLLED DRAWING		TURBO 11 2 LT.	
			MODEL NO.	DR. PLS	DATE 2-09-01	DRAWING NO.
			10,000 PSI PATG SERIES	CH. DAL	DATE 2-14-01	ID10618
						1/97
						C