


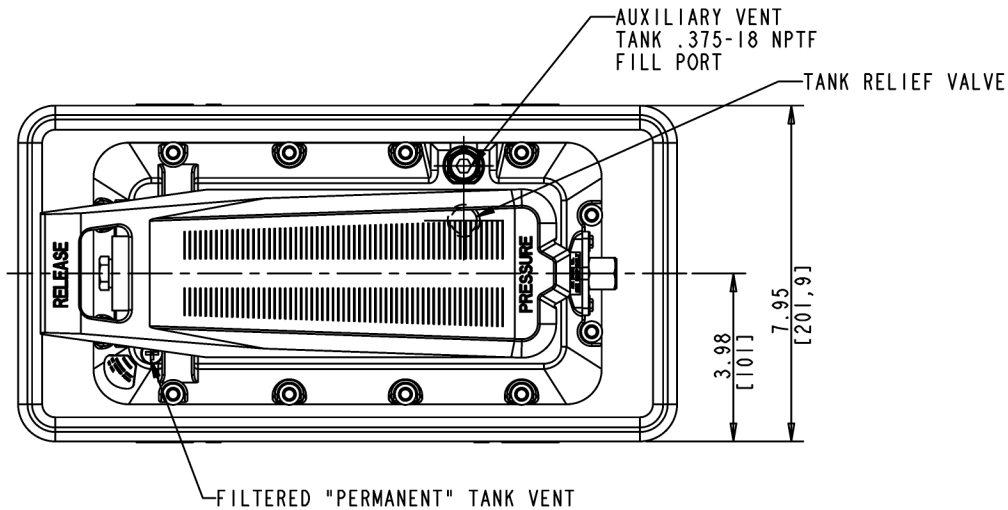
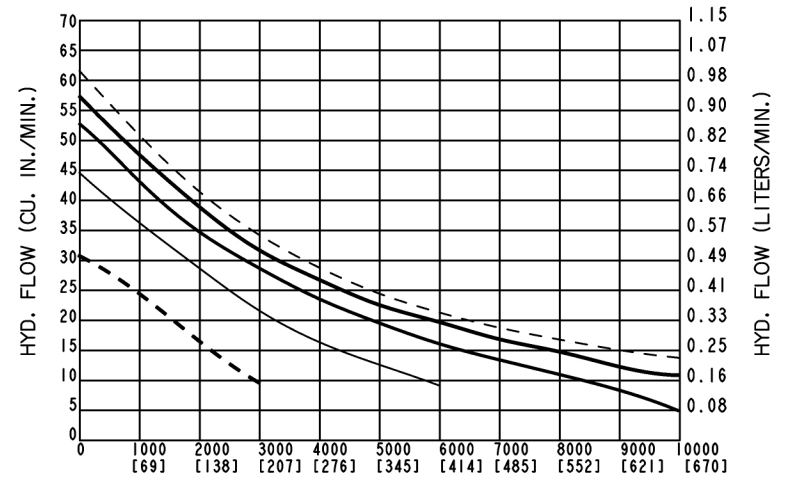




10,000 PSI PATG SERIES
PERFORMANCE OF HYD. FLOW VS HYD. PRESSURE

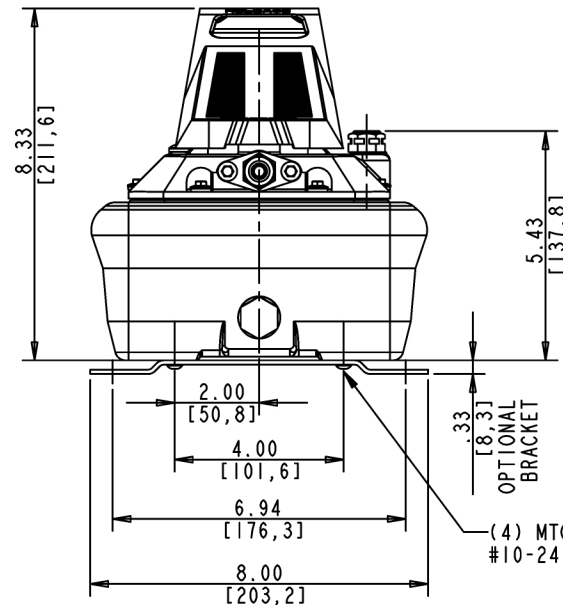

FOR MODELS PATG1105N / PATG1105NB = .375-18 NPTF HYDRAULIC OUTLET
 FOR MODELS PATG1105P / PATG1105PB = G .250-19 BSPP HYDRAULIC OUTLET

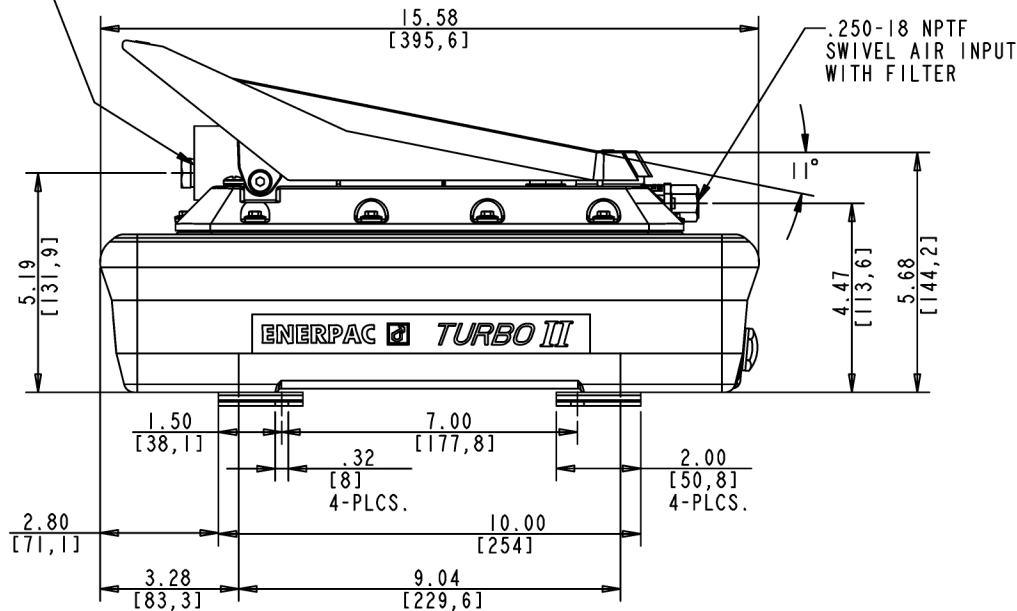

WEIGHT: 21 LBS. [9,5 Kg]
 WEIGHT WITH MOUNTING BRACKET: 22 LBS. [10,0 Kg]
 USABLE OIL CAPACITY: 230 CU. IN. [3,8L]
 RESERVOIR CAPACITY: 265 CU. IN. [4,3L]
 RELIEF VALVE SETTING: 10,400-10,900 PSI [717,24-751,72 BAR] (71.72-75.12 MPa)
 AIR CONSUMPTION: 12 SCFM [340 L/MIN.] @ 75 PSI [5,2 BAR] (0.52 MPa)
 AIR PRESSURE OPERATING RANGE: 25-125 PSI [1,72-8,62 BAR] (0.17-0.86 MPa)
 SOUND LEVEL: TYPICAL 76 DBA

ECO	CHANGES	DATE	DIMENSIONS IN BRACKETS ARE IN [mm]		ENERPAC		DESCRIPTION	
			Specification Sheet				TURBO III 5 LT.	
			Pro/E CONTROLLED DRAWING				DRAWING NO.	
			MODEL NO.		DR. PLS	DATE 4-27-01	1/97	
			10,000 PSI PATG 5LT.		CR. DAL	DATE 4-27-01	ID10647	