
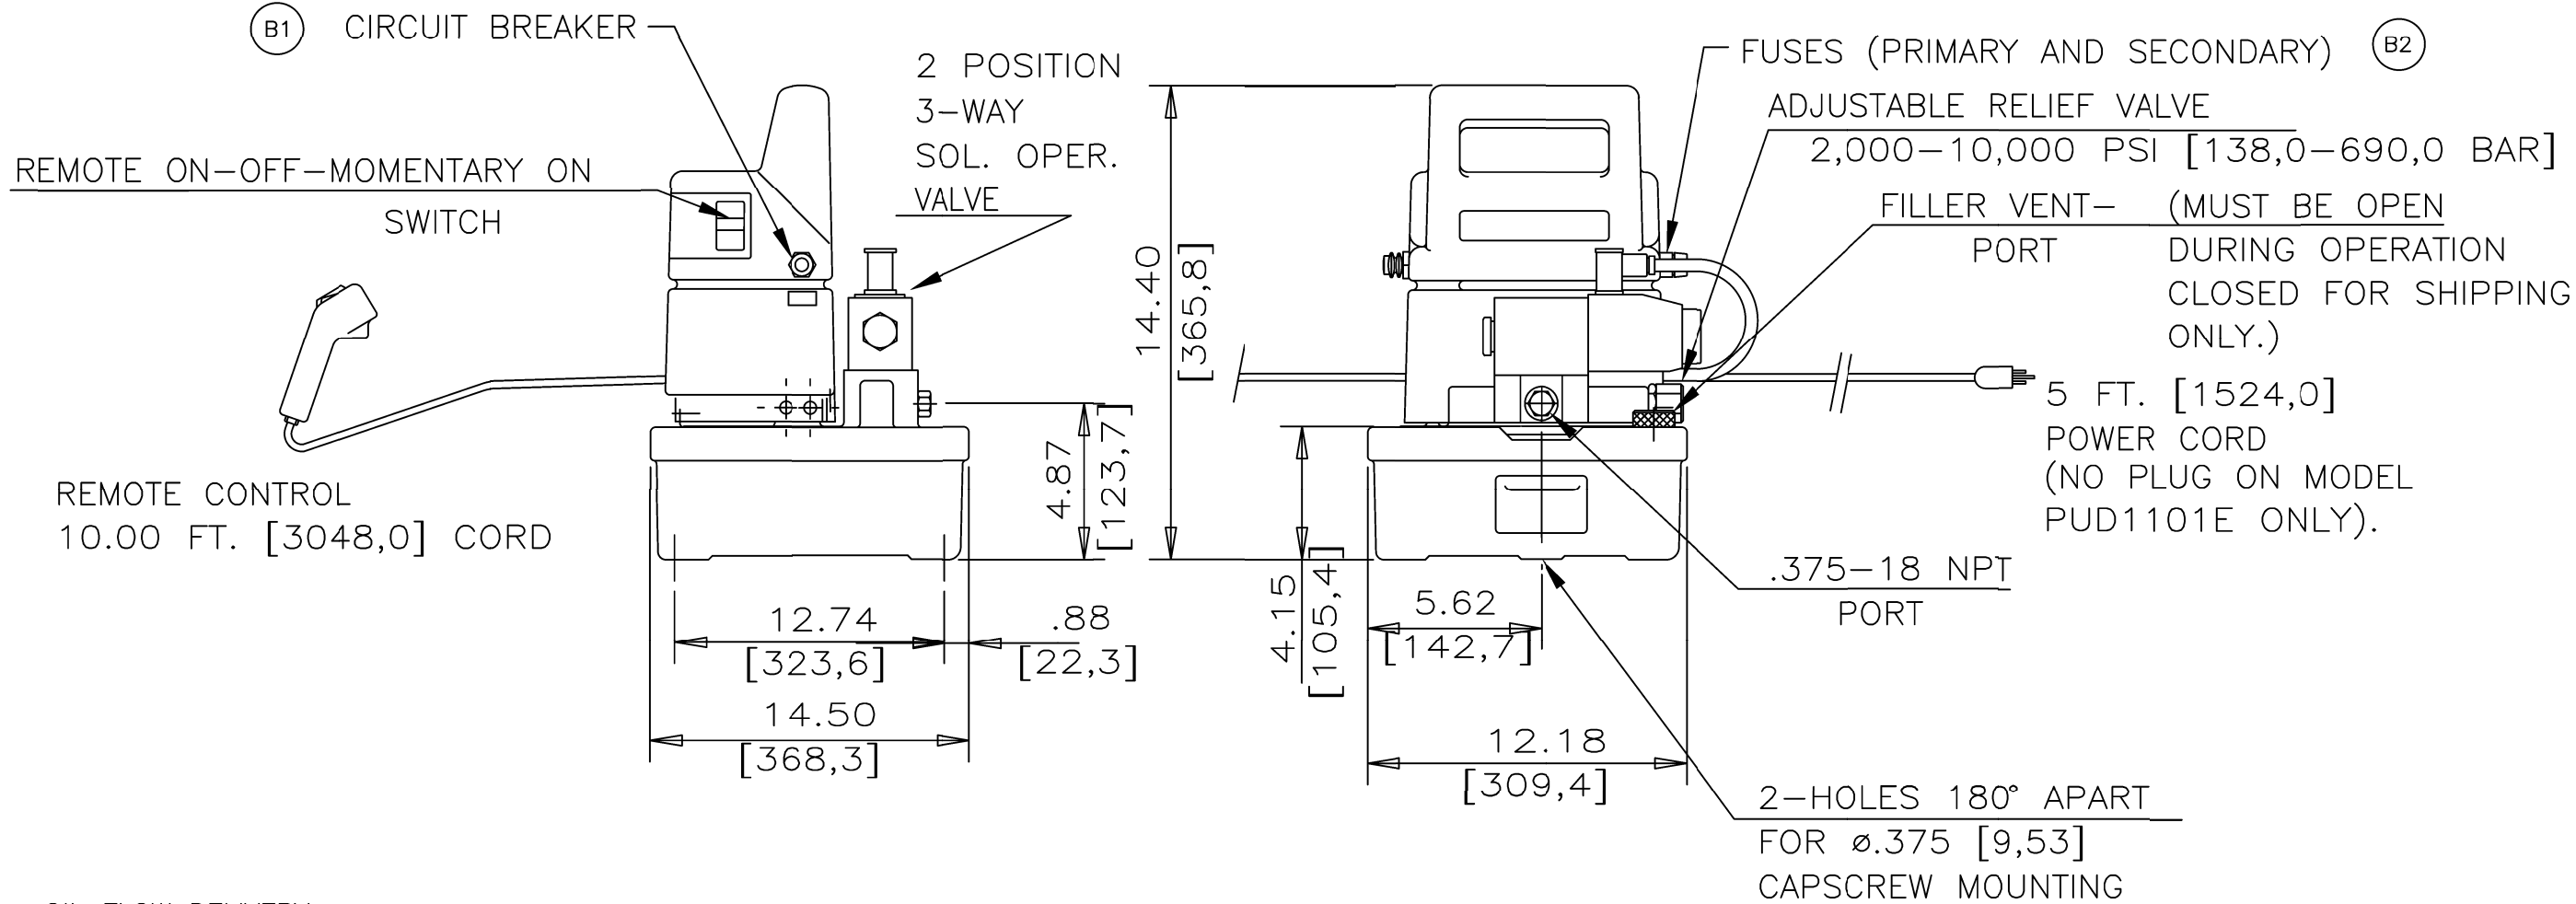


REVISION HISTORY		
REV	ECM #	DATE/INITIAL
	PRH90009	01-18-91
B	0710034	01-28-08/KB



OIL FLOW DELIVERY
 200 IN.³/MIN. [3,4 L/MIN.] FROM 0 PSI – 250 PSI [0 – 17,2 BAR]
 20 IN.³/MIN. [.34 L/MIN.] 8,500 PSI [586,0 BAR]
 18 IN.³/MIN. [.31 L/MIN.] 10,000 PSI [690,0 BAR]
 MAX. CONTINUOUS PRESSURE – 8,500 PSI [586,0 BAR]
 INTERMITTENT PRESSURE –10,000 PSI [690,0 BAR] , 30 SECONDS MAX.
 MAX. OPERATING OIL TEMP. – 150° F. [65° C.]
 MODEL PUD1101B FOR 115V, 60 HZ., 1 PHASE. / CSA APPROVED (B3)
 MODEL PUD1101E FOR 230V, 50 HZ., 1 PHASE. / CSA & CE APPROVED

SHIPPING WEIGHT 34 LBS. [15,4 Kg]
 RESERVOIR CAPACITY – 1.00 GAL. [3,79 L.] TOTAL
 RESERVOIR CAPACITY – .88 GAL. [3,33 L.] USABLE
 15 AMP. , 120V. GROUNDED 1 PHASE CIRCUIT REQUIRED,
 FOR MODEL PUD1101B.
 FOR MODEL PUD1101E (CONSULT FACTORY).

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		DO NOT SCALE DRAWING		ENERPAC 	
FINISH UNLESS SPECIFIED		DECIMALS METRIC		APPROVALS	DATE	TITLE 0.5 HP DUMP PUMP SOL. OPER. 2-WAY	
		.X ? .02 X. ?0.5mm .XX ? .01 X.X ?0.25mm .XXX ? .005 X.XX ?0.1mm ANGLES ?1°		DRAWN BY: KB	01-28-08	SIZE B DWG NO. ID5029	
MATERIAL:		THIS PRINT AND INFORMATION HEREIN IS CONFIDENTIAL AND PROPRIETARY AND IS THE PROPERTY OF ENERPAC. IT IS NOT TO BE COPIED OR REPRODUCED WITHOUT WRITTEN PERMISSION.		ENGR: NM	01-28-08	SCALE	DWG FORMAT
FINISH:							SHEET
TREATMENT:							AutoCAD 1 OF 1