
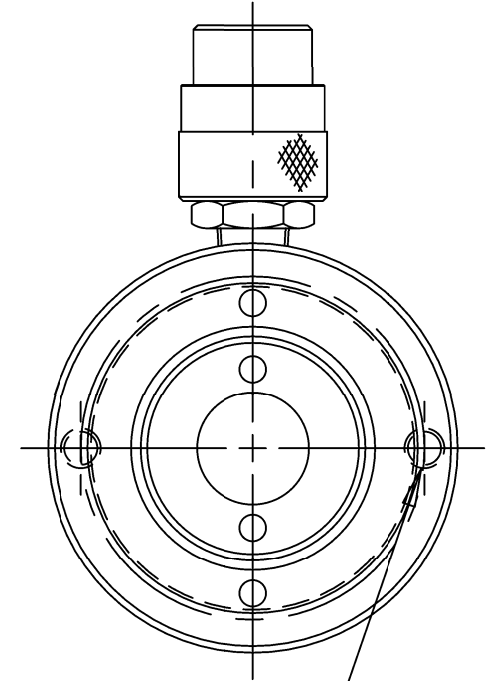


.250-18 N.P.T.F.
THREADS
(RWH MODELS)


.375-18 N.P.T.F.
THREAD
(RCH MODELS)

COLLAPSED HT. - 12.05 [306,0]
EXTENDED HT. - 18.12 [460,0]

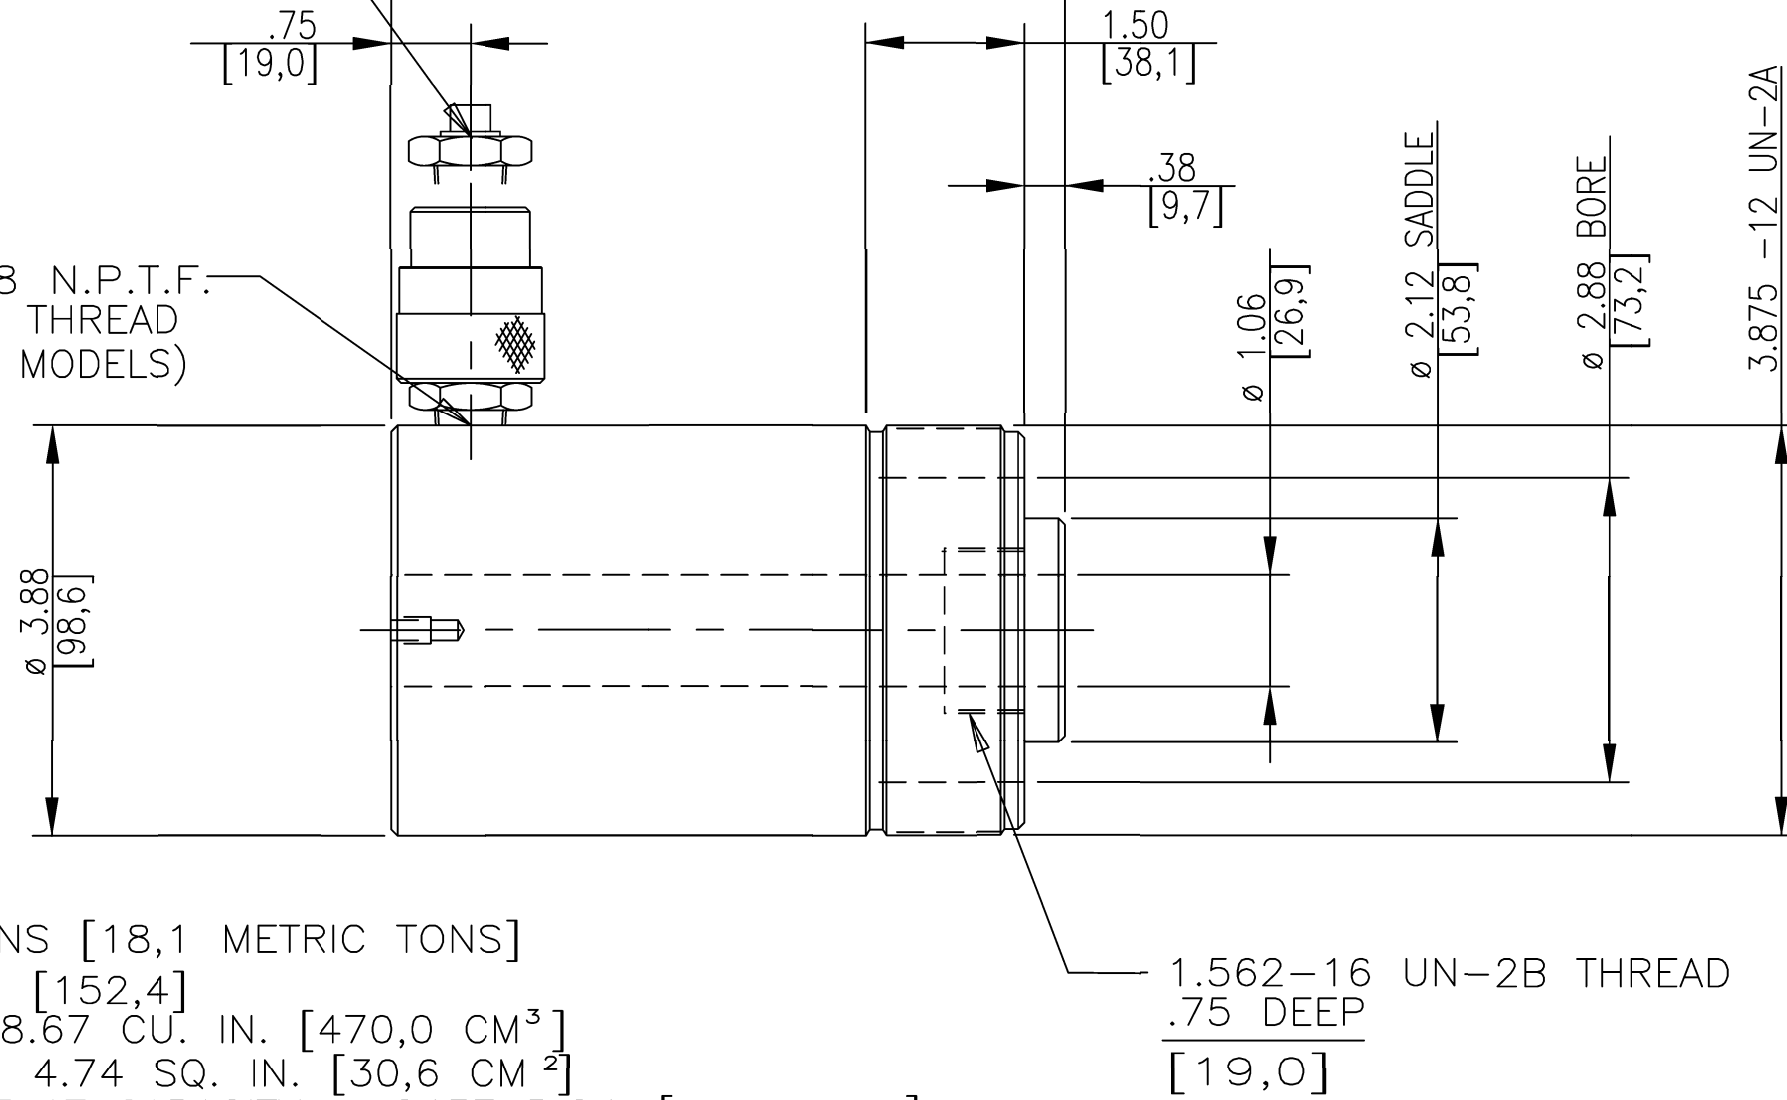


(A)
2-HOLES
.375-16UNC-2B THD.
.38 DEEP (FAR SIDE)
[9,7]
ON A Ø3.25 B.C.
[82,6]

CAPACITY - 20 TONS [18,1 METRIC TONS]
STROKE - 6.00 IN. [152,4]
OIL CAPACITY - 28.67 CU. IN. [470,0 CM³]
EFFECTIVE AREA - 4.74 SQ. IN. [30,6 CM²]
INTERNAL PRESSURE AT CAPACITY - 8437 P.S.I. [581,9 BAR]
PLUNGER DIA. - 2.12 IN. [53,8]
SHIPPING WEIGHT - 31 LBS [14,1 KG.]

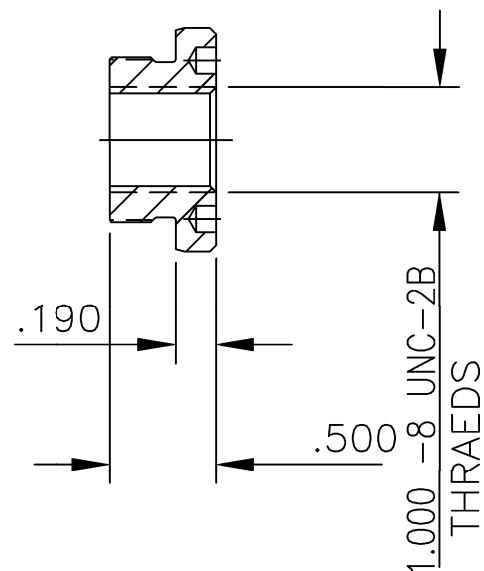

ALTERNATE SADDLE
PART NO. HP-2015

E21896 A 09-07-94/GHD PRH91204 RELEASED 8-9-94	DATE	DIMENSIONS IN BRACKETS ARE IN [mm]		ENERPAC 		13000 WEST SILVER SPRING DR. BUTLER, WISCONSIN 53007	
	CHANGES	Specification Sheet				DESCRIPTION 20 TON HOLLOW CYLINDER	
	ECO	MODEL NO. RCH206		DR. CMI	DATE 05/19/94	DRAWING NO. ID5461	
				CH. GJB	DATE 8-9-94	9/93 B	