
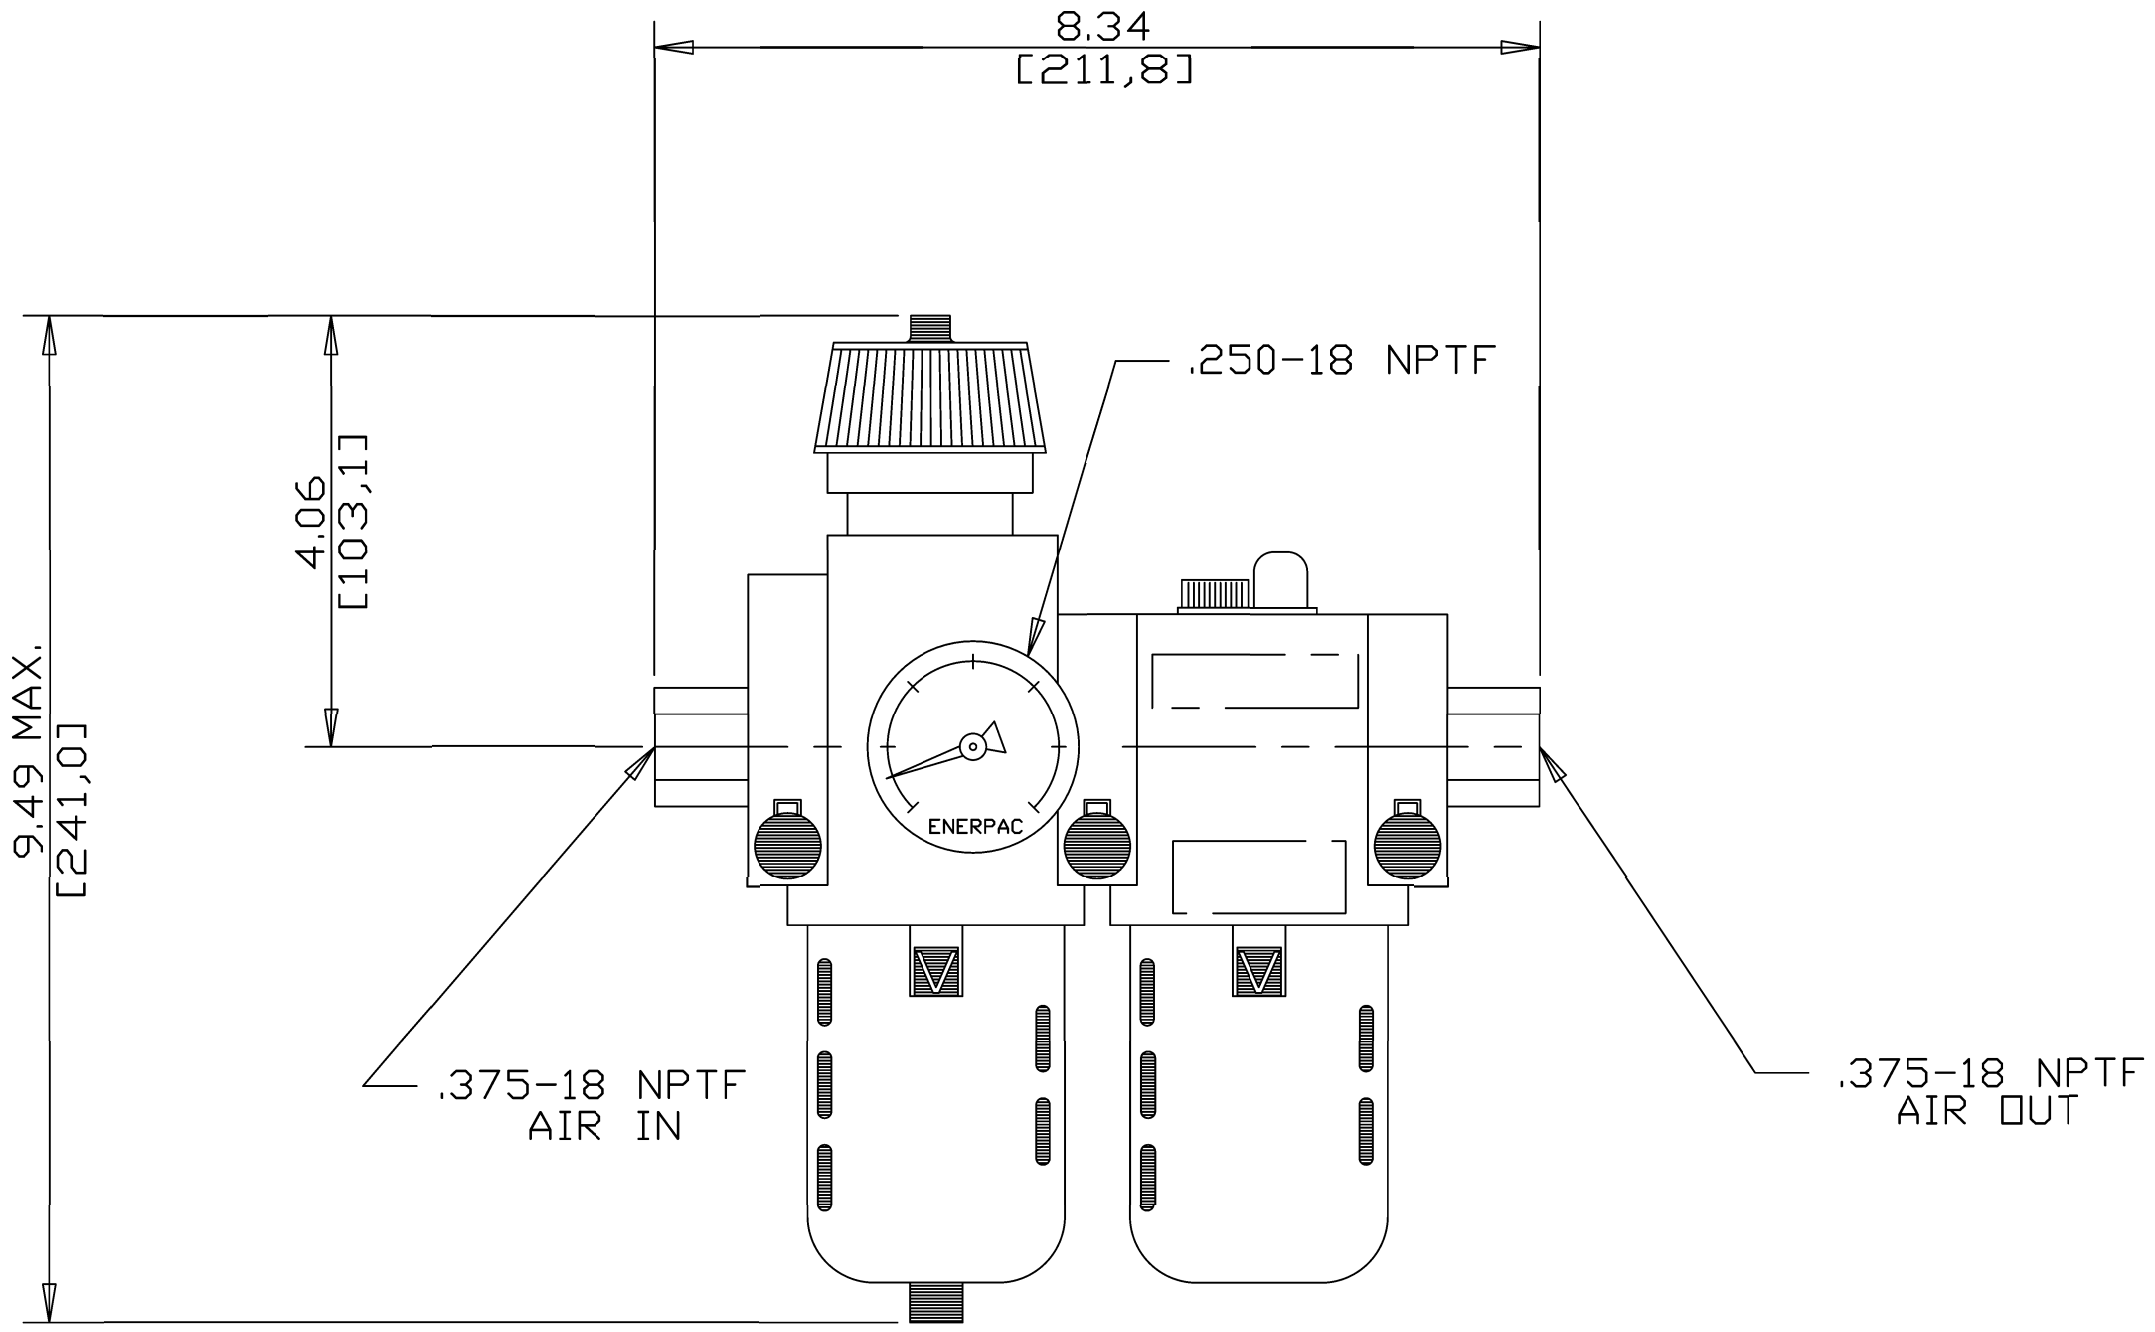




SPECIFICATIONS

- FLOW RATE AT 90 PSIG [6,3 BAR]
- 48 scfm [22 dm³/s]
- MAX. OPERATING CONDITIONS
- TEMP: 125°F [52°C]
 - PRESS: 150 PSIG [10 BAR]

PRH90203 RELEASED 5-2-90	DATE	DIMMENSIONS IN BRACKETS ARE IN [mm]		ENERPAC. 		13000 WEST SILVER SPRING DR. BUTLER, WISCONSIN 53007	
	CHANGES	Specification Sheet				DESCRIPTION REGULATOR	
	ECO	MODEL NO. RFL 102		DR. SPM	DATE 10-27-89	DRAWING NO. ID3232	D11604 B
				CH. GJB	DATE 5-2-90		