
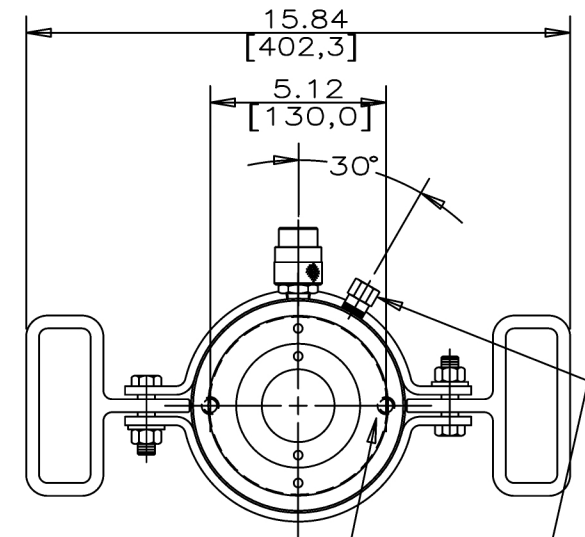


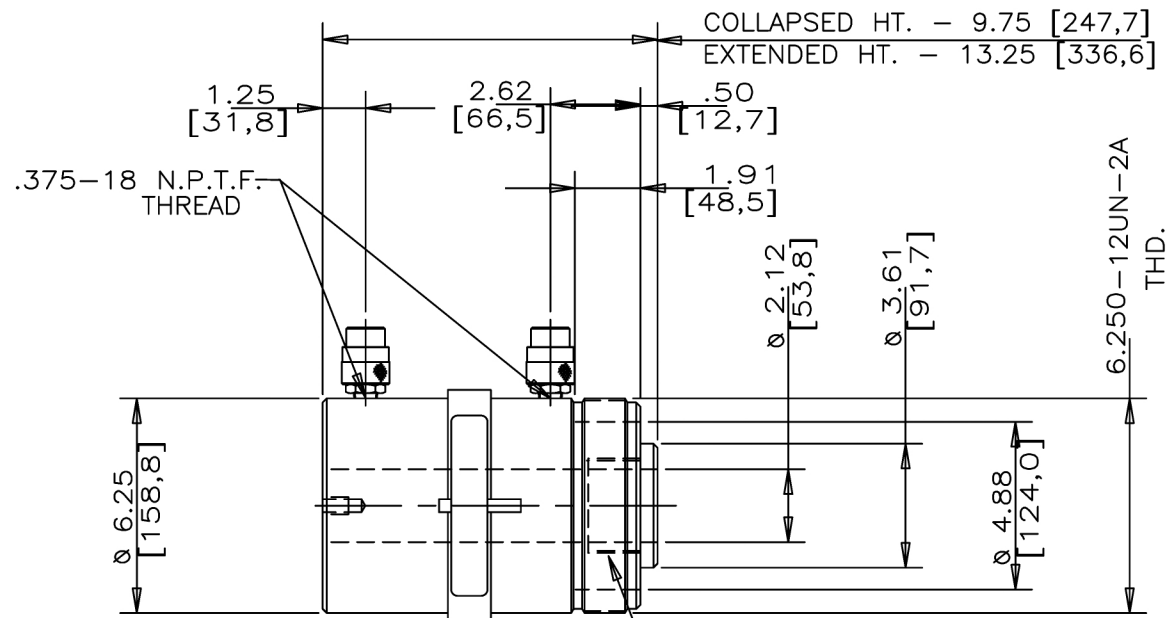

CAPACITY PUSH - 60 TONS [54,5 METRIC TONS]
 CAPACITY PULL - 41.8 TONS [38,0 METRIC TONS]
 STROKE - 3.50 IN. [88,9 MM]
 OIL CAPACITY PUSH - 44.56 CU. IN. [730,2 CM³]
 OIL CAPACITY PULL - 29.30 CU. IN. [480,1 CM³]
 EFFECTIVE AREA PUSH - 12.73 SQ. IN. [82,1 CM²]
 EFFECTIVE AREA PULL - 8.37 SQ. IN. [54,0 CM²]
 INTERNAL PRESSURE AT CAPACITY PUSH - 9427 P.S.I. [650 BAR]
 INTERNAL PRESSURE AT CAPACITY PULL - 10,000 P.S.I. [689 BAR]
 PLUNGER DIA. - 3.62 IN. [91,9 MM]
 SHIPPING WEIGHT - 62 LBS. [28,1 KGS.]

2.750-16 UN-2B THREAD
 .75 DEEP
 [19,0]

2-HOLES
 .500-13UNC-2B THD.
 .62 DEEP (FAR SIDE)
 [15,7]

RELIEF VALVE SET AT
 10,400 P.S.I. [717,2 BAR]

PRH0202 RELEASED 6-11-91

ECO CHANGES


DATE

DIMMENSIONS IN BRACKETS ARE IN [mm]

ENERPAC

13000 WEST SILVER SPRING DR.
BUTLER, WISCONSIN 53007

Specification Sheet



DESCRIPTION
60 TON HOLL-O CYL.

MODEL NO. RRH 603-4

DR.
GJK
CH.
GJB

DATE
7-18-90
DATE
9-3-91

DRAWING NO.
ID3475

D11090
B