
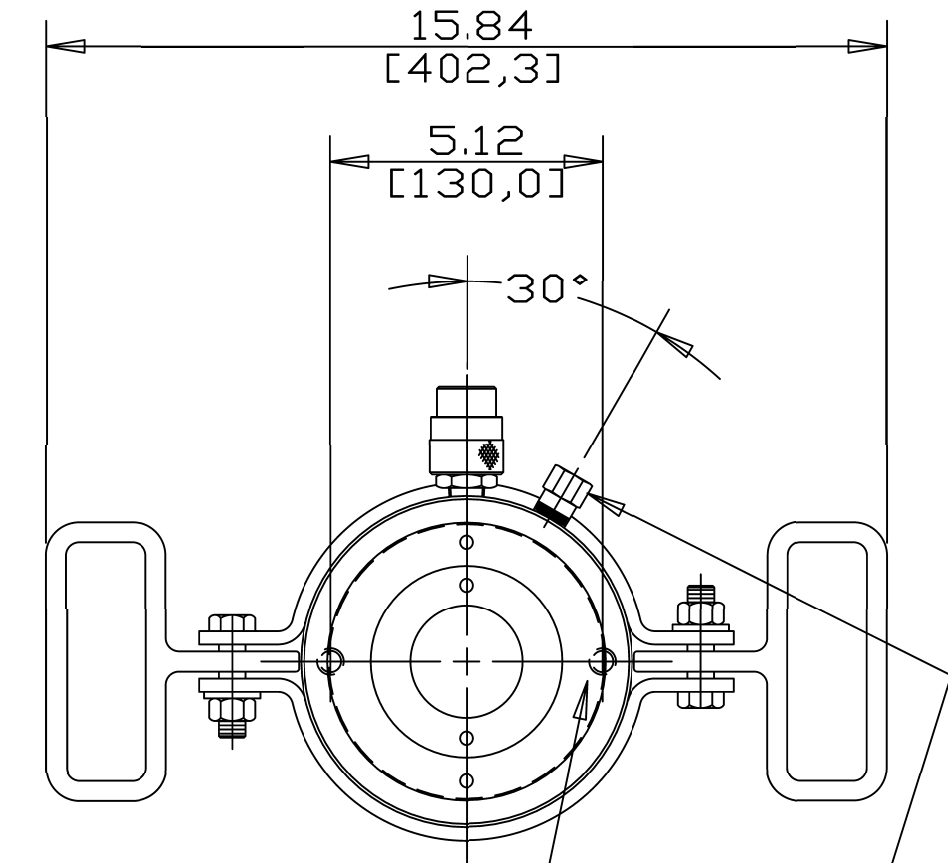


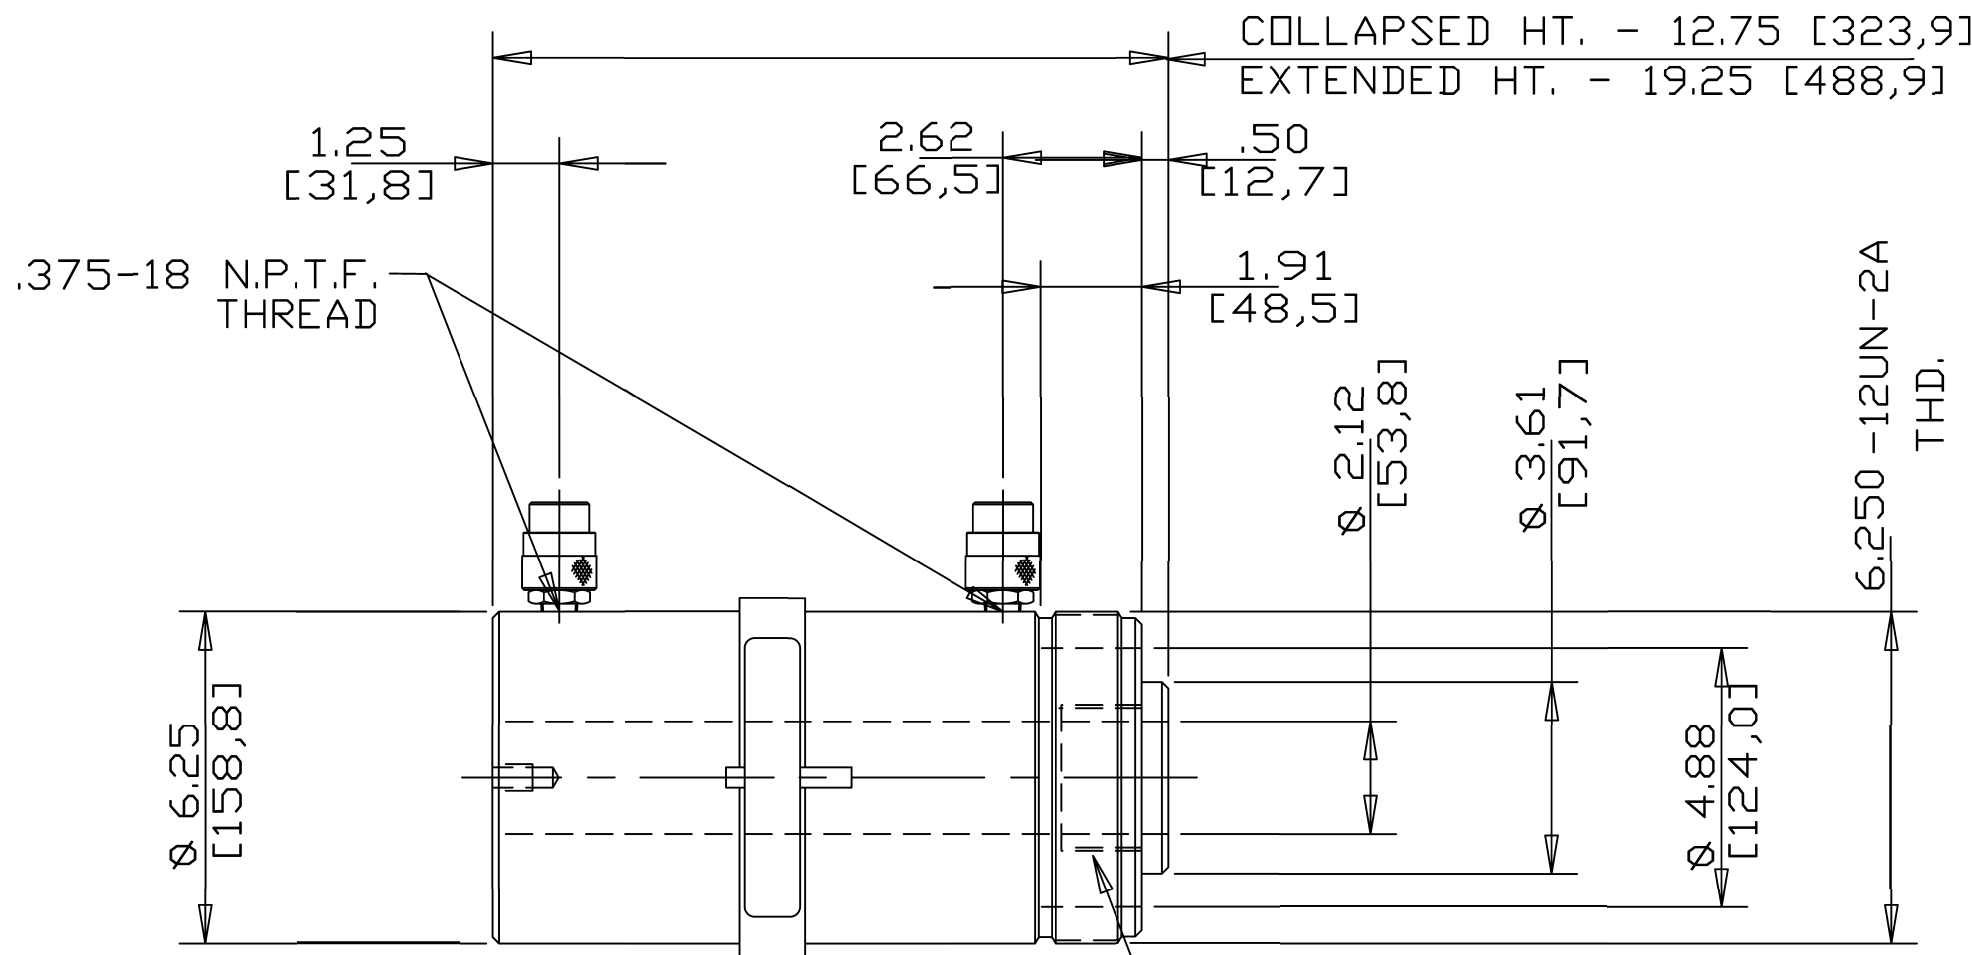


CAPACITY PUSH - 60 TONS [54,5 METRIC TONS]
 CAPACITY PULL - 41.8 TONS [38,0 METRIC TONS]
 STROKE - 6.50 IN. [165,1 MM]
 OIL CAPACITY PUSH - 82.74 CU. IN. [1355,9 CM³]
 OIL CAPACITY PULL - 54.40 CU. IN. [891,5 CM³]
 EFFECTIVE AREA PUSH - 12.73 SQ. IN. [82,1 CM²]
 EFFECTIVE AREA PULL - 8.37 SQ. IN. [54,0 CM²]
 INTERNAL PRESSURE AT CAPACITY PUSH - 9427 P.S.I. [650 BAR]
 INTERNAL PRESSURE AT CAPACITY PULL - 10,000 P.S.I. [689 BAR]
 PLUNGER DIA. - 3.62 IN. [91,9 MM]
 SHIPPING WEIGHT - 78 LBS. [35,4 KGS.]

2.750-16 UN-2B THREAD
 .75 DEEP
 [19,0]

2-HOLES
 .500-13UNC-2B THD.
 .62 DEEP (FAR SIDE)
 [15,7]

RELIEF VALVE SET AT
 10,400 P.S.I. [717,2 BAR]

DATE	DIMENSIONS IN BRACKETS ARE IN [mm]		ENERPAC 		13000 WEST SILVER SPRING DR. BUTLER, WISCONSIN 53007	
CHANGES	Specification Sheet				DESCRIPTION 60 TON HOLL-Ø CYL.	
ECO	MODEL NO. RRH 606-4		DR. GJK	DATE 7-18-90	DRAWING NO. ID3476	D11093 B
			CH. GJB	DATE 9-3-91		