

SPECIFICATIONS



CAPACITY: 35 TONS [317,5 KN]

OIL CAPACITY: 4.58 CU. IN. [75,0 CU. CM.]

PUNCH & DIE Ø'S: 3/8 [9,5]
 1/2 [12,7]
 5/8 [15,9]
 3/4 [19,0]

WEIGHT: 30 LBS. [13,6 KG.]

PUNCH CAPACITY UP TO 1/2" [12,7] MILD STEEL
 (FOR 13/16" [20,6] @ 10,000 [689,7 BARS] PSI IN MATERIAL
 WITH SHEAR STRENGTH NO GREATER THAN 54,000 [3724,4 BARS] PSI
 PUNCH CAPACITY UP TO 1/2" [12,7] MILD STEEL

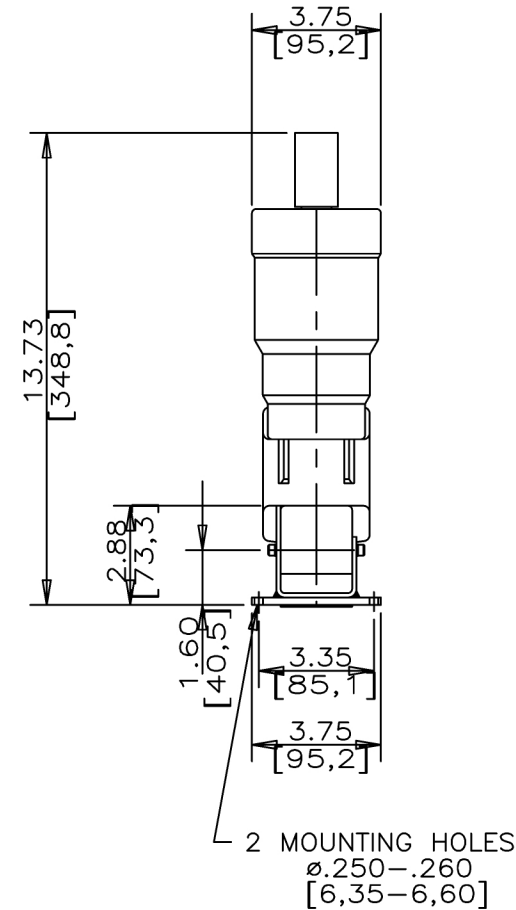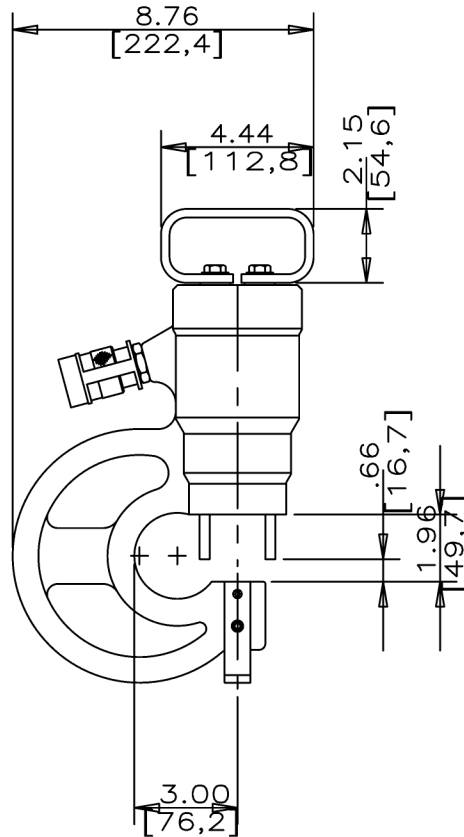

E18753 CHGA SPM 10-8-90	PRH88037 RELEASED 1-5-90	DATE	DIMENSIONS IN BRACKETS ARE IN [mm]		ENERPAC. 		13000 WEST SILVER SPRING DR. BUTLER, WISCONSIN 53007	
			Specification Sheet		 		DESCRIPTION 35 TON PUNCH	
	ECO	CHANGES	MODEL NO.	SP-35	DR. SPM	DATE 12-1-89	DRAWING NO.	ID3240
					CH. GJB	DATE 1-5-90		