
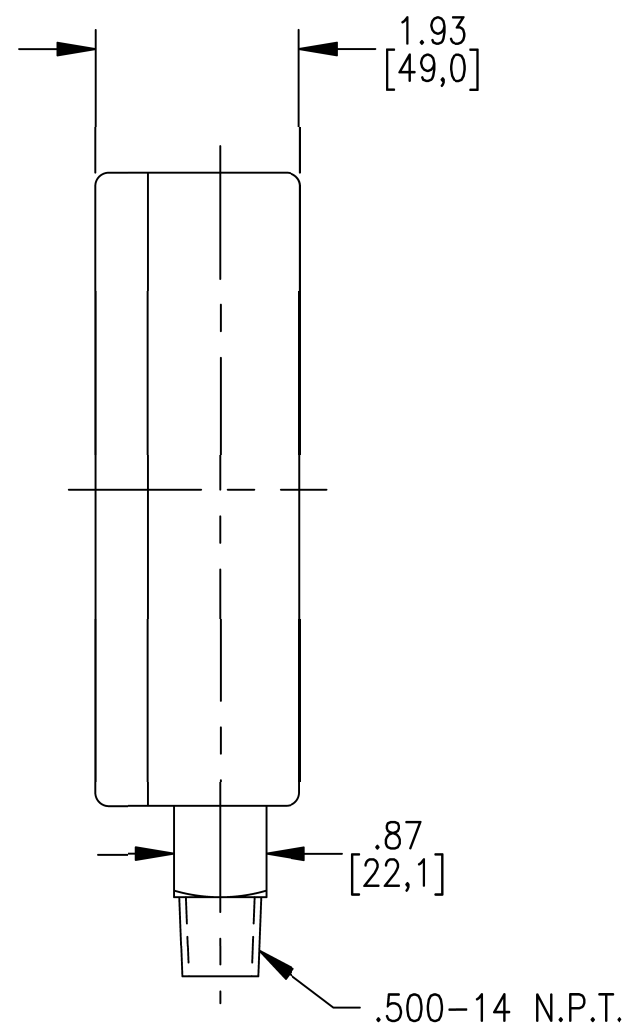
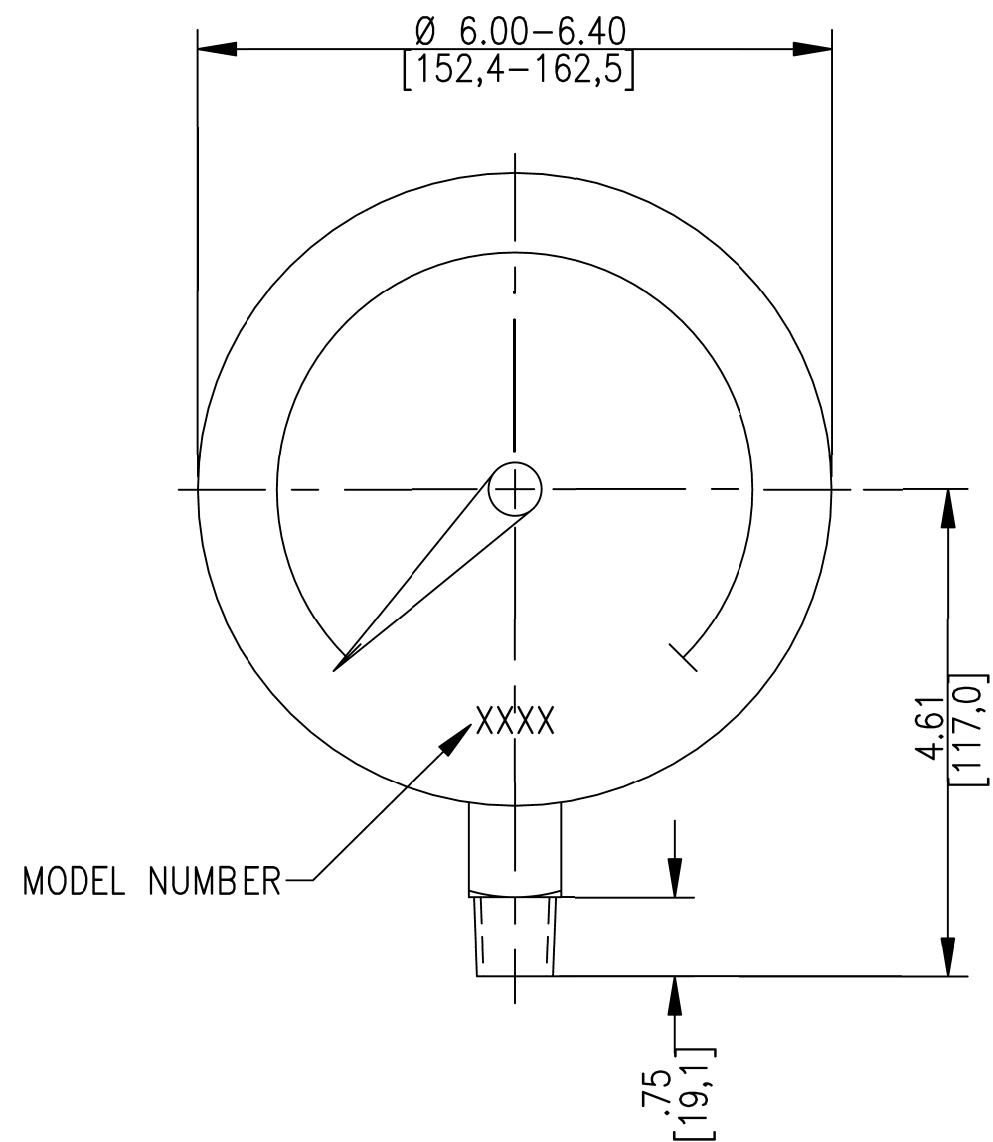




DIAL DIVISIONS
 MAJOR: 100 PSI/ 10 BAR
 INTERMEDIATE: 50 PSI/ 5 BAR
 MINOR: 10 PSI/ 1 BAR
 NUMBERS 0-100-200-300-400-500-600-700-800-900-1000/
 0-10-20-30-40-50-60-70
 RANGE: 0-1000 P.S.I./ 0 - 70 BAR
 CONNECTION: 1/2" NPT 316 SS
 OPERATING TEMP.: -10°F TO +140°F
 (-25°C TO +60°C)

ACCURACY ±1/2% FULL SCALE
 CASE: 304 STAINLESS STEEL MATTE
 WINDOW: POLYCARBONATE
 POINTERS: ADJUSTABLE POINTER
 DRAG POINTER W/NON-REMOVABLE KEY

9706003 B R&R 08-17-01/MP	DATE	DIMENSIONS IN BRACKETS ARE IN [mm]		ENERPAC. 		13000 WEST SILVER SPRING DR. BUTLER, WISCONSIN 53007	
	CHANGES	Specification Sheet		 		DESCRIPTION TEST SYSTEM GAUGE 0-1000 P.S.I.	
	ECO	MODEL NO. T6001L		DR. MP	DATE 07/07/97	DRAWING NO. ID1924 (B)	9/93
				CH. GJB	DATE 3/20/98		B