
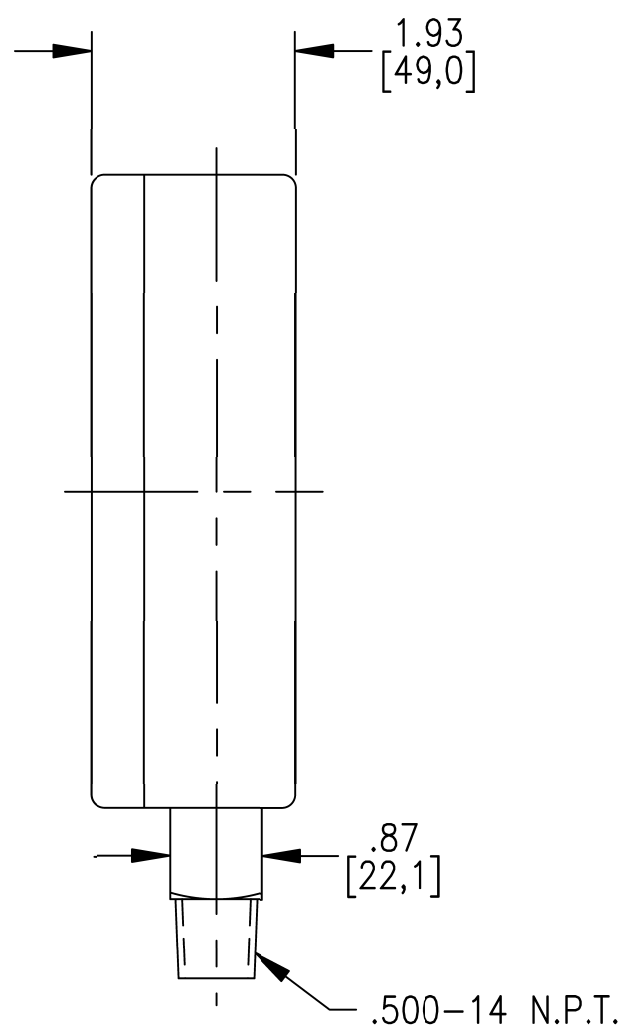
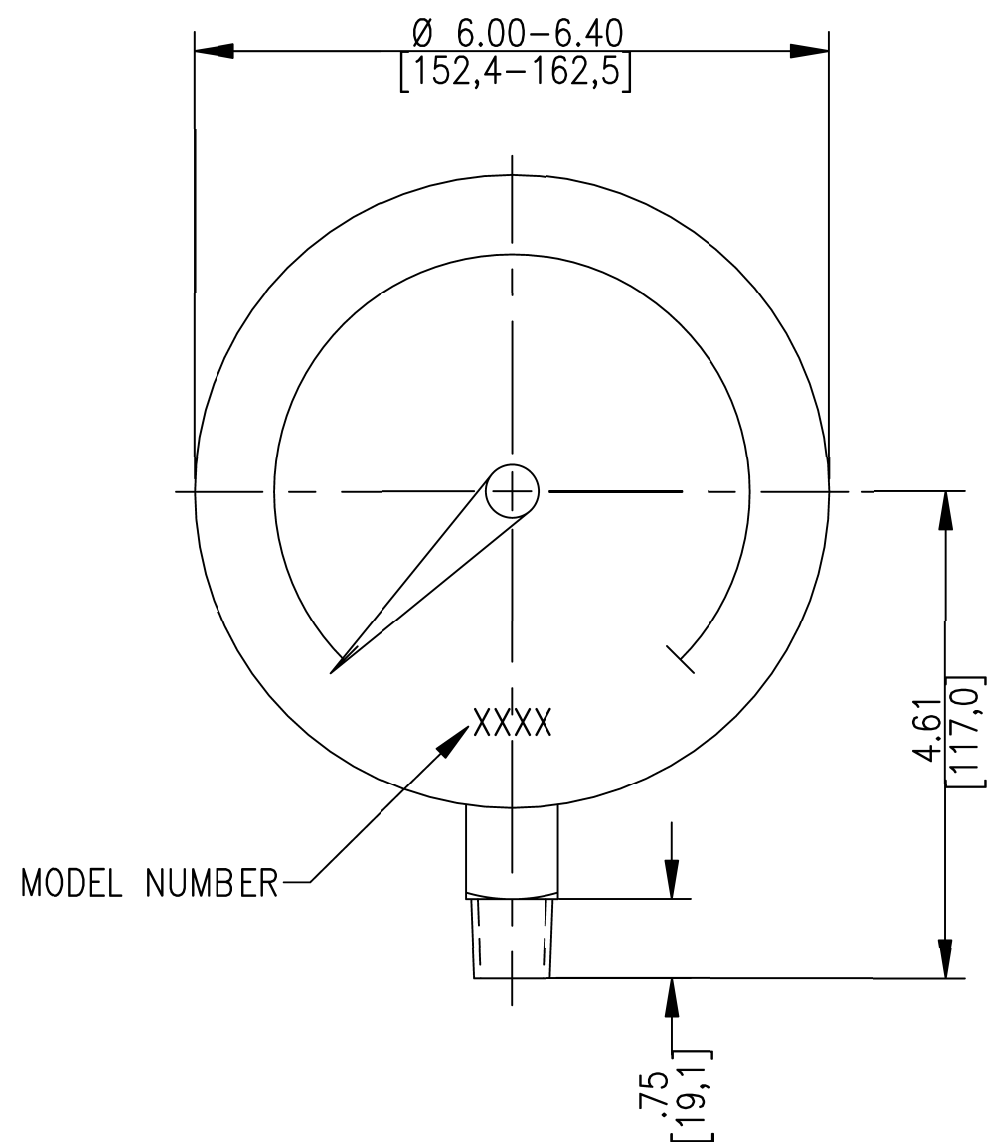




DIAL DIVISIONS
 MAJOR: 500 PSI/ 50 BAR
 INTERMEDIATE: 100 PSI/ 10 BAR
 MINOR: 50 PSI/ 5 BAR
 NUMBERS 0-500-1000-1500-2000-2500-3000-3500-4000-4500-5000
 0-50-100-150-200-250-300-350
 RANGE: 0-5000 P.S.I./ 0 - 350 BAR
 CONNECTION: 1/2" NPT 316 SS
 OPERATING TEMP.: -10°F TO +140°F
 (-25°C TO +60°C)
 ACCURACY $\pm 1/2\%$ FULL SCALE
 CASE: 304 STAINLESS STEEL MATTE
 WINDOW: POLYCARBONATE
 POINTERS: ADJUSTABLE POINTER
 DRAG POINTER W/NON-REMOVABLE KEY

9706003 B R&R 08-17-01/MP	DATE	DIMENSIONS IN BRACKETS ARE IN [mm]		ENERPAC. 		13000 WEST SILVER SPRING DR. BUTLER, WISCONSIN 53007	
	CHANGES	Specification Sheet				DESCRIPTION TEST SYSTEM GAUGE 0-5000 P.S.I.	
	ECO	MODEL NO. T6002L		DR. MP	DATE 07/08/97	DRAWING NO. ID1925 (B)	9/93
				CH. GJB	DATE 3/20/98		B

135067A