
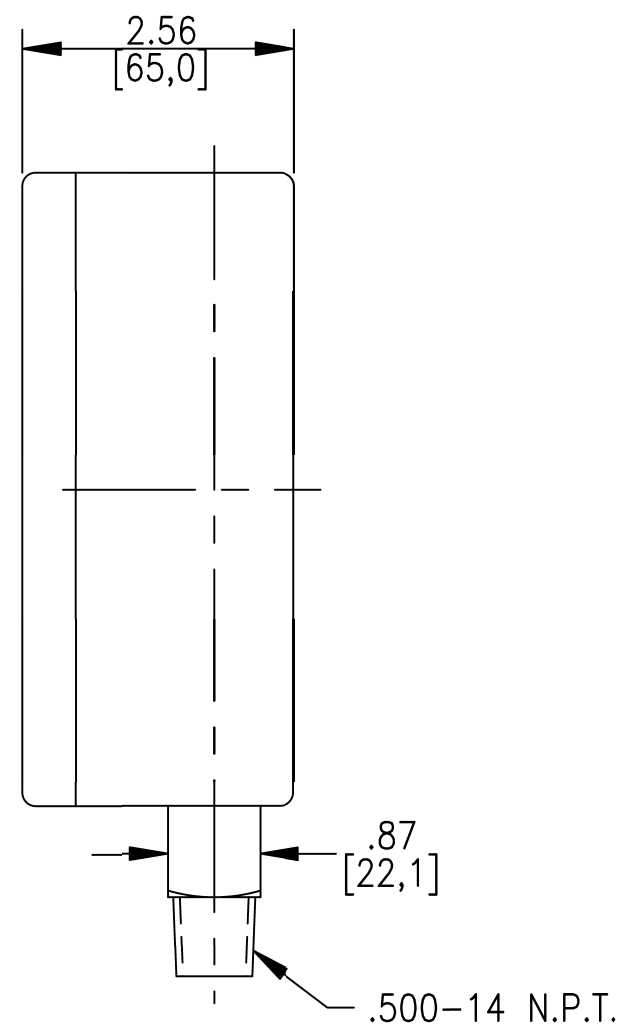
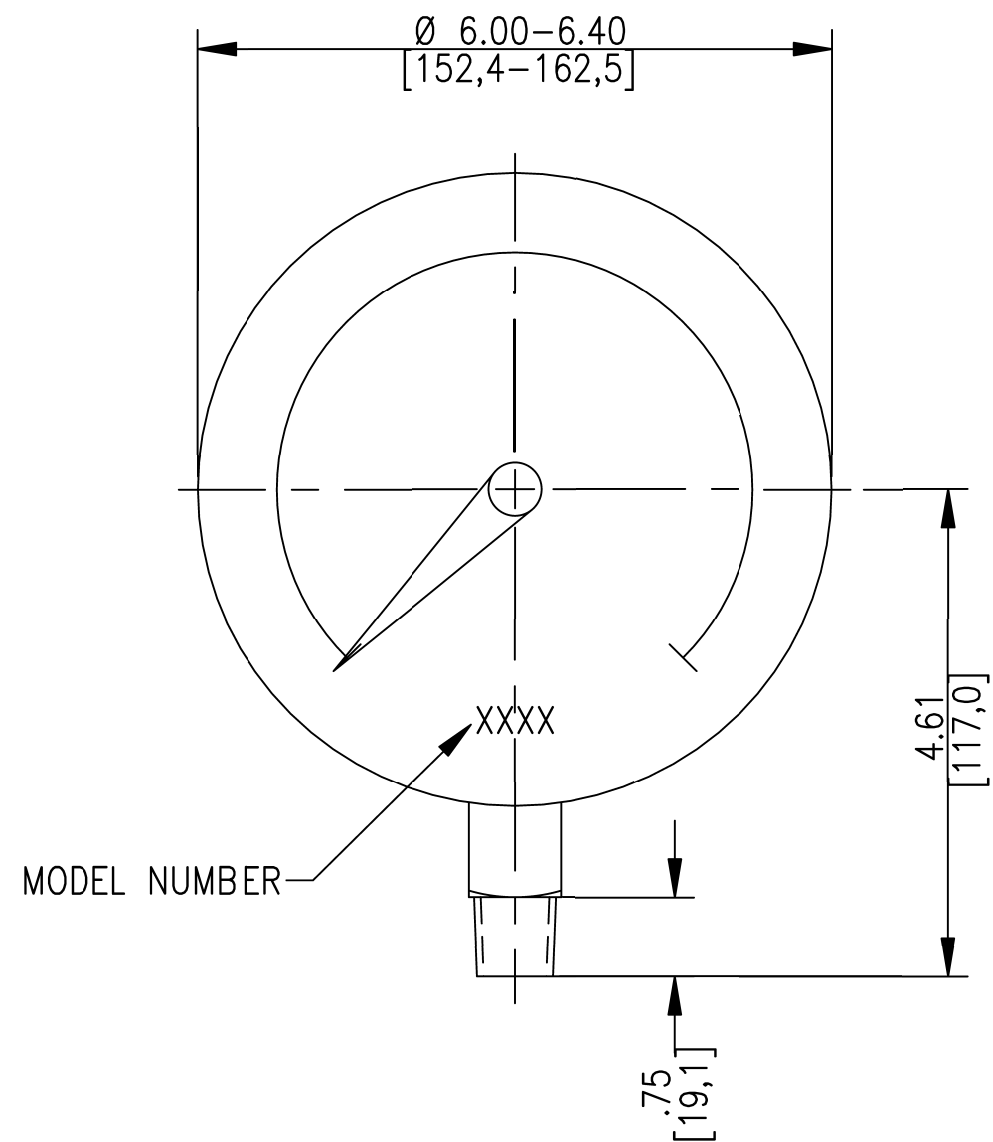




DIAL DIVISIONS
 MAJOR: 1000 PSI/ 100 BAR
 INTERMEDIATE: 500 PSI/ 50 BAR
 MINOR: 100 PSI/ 10 BAR
 NUMBERS 0-1000-2000-3000-4000-5000
 6000-7000-8000-9000-10000/
 0-100-200-300-400-500-600-700
 RANGE: 0-10000 P.S.I./ 0 - 700 BAR
 CONNECTION: 1/2" NPT 316 SS
 OPERATING TEMP.: -10°F TO +140°F
 (-25°C TO +60°C)
 ACCURACY ±1/2% FULL SCALE
 CASE: 304 STAINLESS STEEL MATTE
 WINDOW: POLYCARBONATE
 POINTERS: ADJUSTABLE POINTER
 DRAG POINTER W/NON-REMOVABLE KEY

9706003 B R&R 08-17-01/MP	DATE	DIMENSIONS IN BRACKETS ARE IN [mm]		ENERPAC. 		13000 WEST SILVER SPRING DR. BUTLER, WISCONSIN 53007	
	CHANGES	Specification Sheet		 		DESCRIPTION TEST SYSTEM GAUGE 0-10000 P.S.I.	
	ECO	MODEL NO. T6003L		DR. MP	DATE 07/08/97	DRAWING NO. ID1914 (B)	9/93
				CH. GJB	DATE 3/20/98		B

135163A