
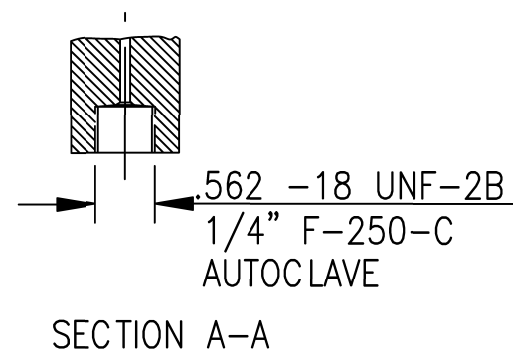
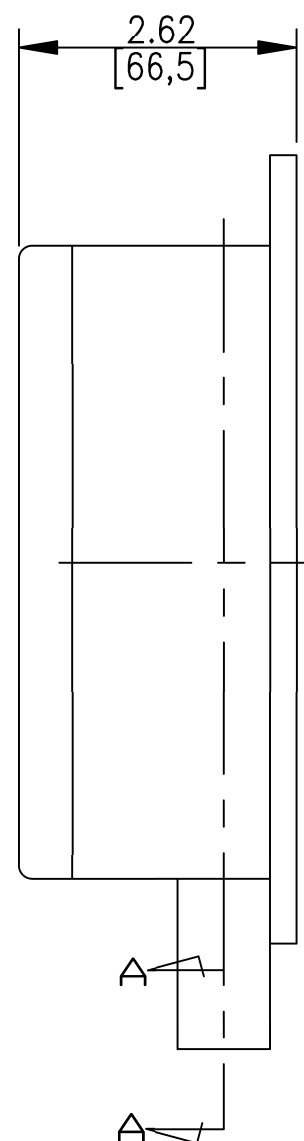
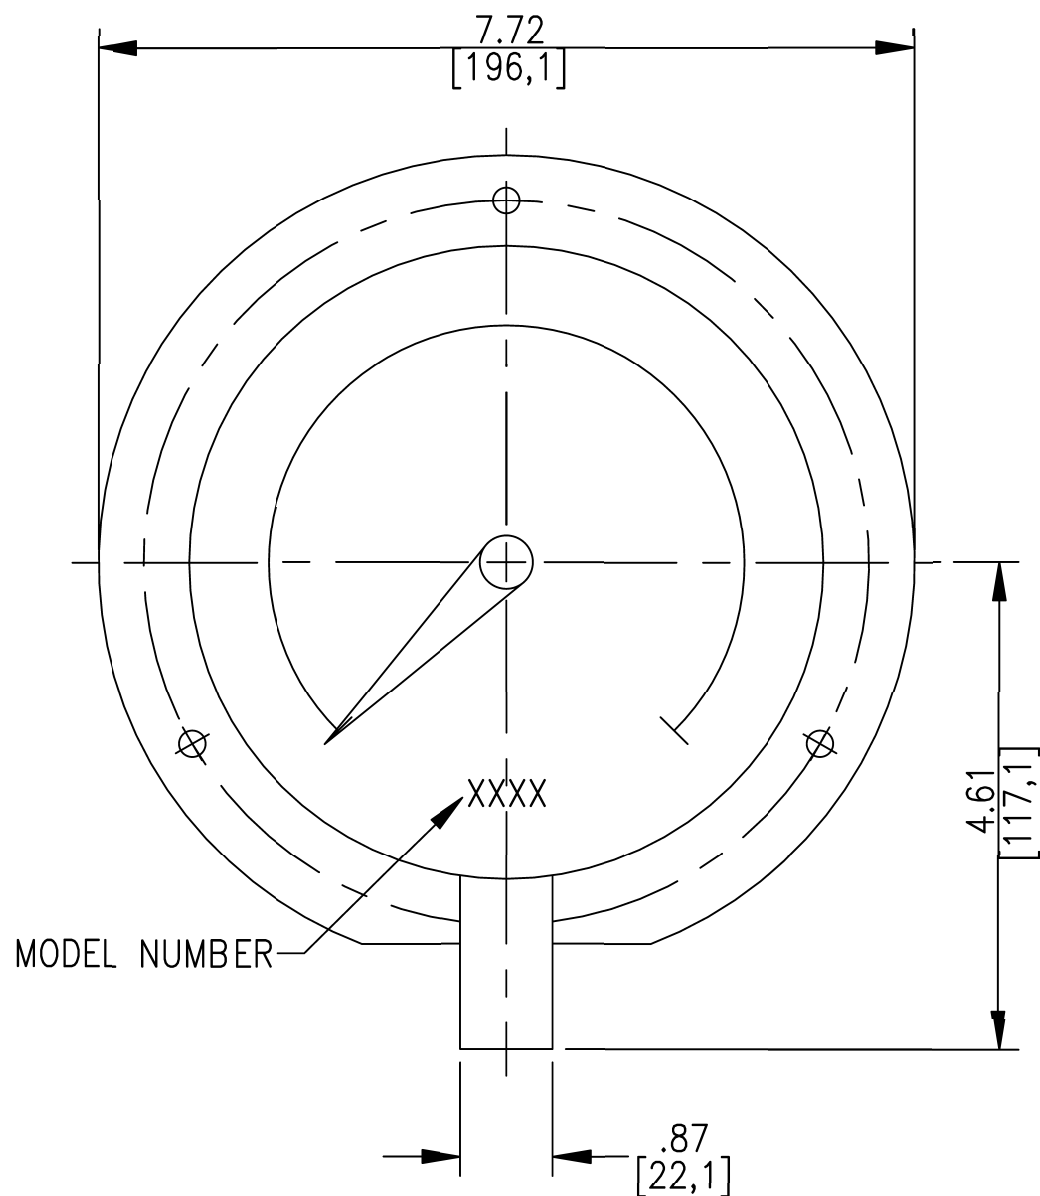




DIAL DIVISIONS
 MAJOR: 5000 PSI/ 500 BAR
 INTERMEDIATE: 1000 PSI/ 100 BAR
 MINOR: 200 PSI/ 20 BAR
 NUMBERS 0-5000-10000-15000-20000-25000
 30000-35000-40000/
 0-500-1000-1500-2000-2500
 RANGE: 0-40000 P.S.I./ 0 - 2800 BAR
 CONNECTION: AUTOCLAVE 1/4" F-250-C
 (.562-18 INTERNAL THREAD) CARBON STEEL
 OPERATING TEMP.: -10°F TO +140°F
 (-25°C TO +60°C)

ACCURACY ±1.5% FULL SCALE
 CASE: 304 STAINLESS STEEL MATTE
 WINDOW: POLYCARBONATE
 POINTERS: ADJUSTABLE POINTER
 DRAG POINTER W/NON-REMOVABLE KEY

9706003	B	R&R	08-17-01/MP	DATE	DIMENSIONS IN BRACKETS ARE IN [mm]		ENERPAC. 		13000 WEST SILVER SPRING DR. BUTLER, WISCONSIN 53007	
				CHANGES	Specification Sheet				DESCRIPTION TEST SYSTEM GAUGE 0-40000 P.S.I.	
				ECO	MODEL NO.	T6010L	DR. MP	DATE 07/08/97	DRAWING NO.	ID1931 (B)
							CH. GJB	DATE 3/20/98		

135073A