
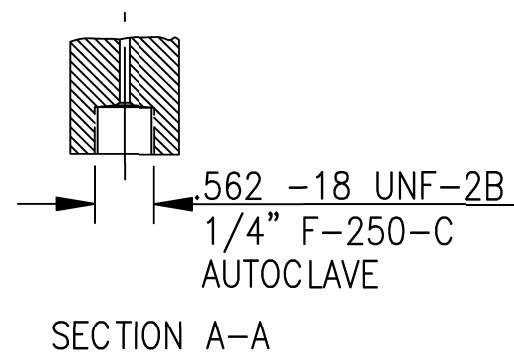
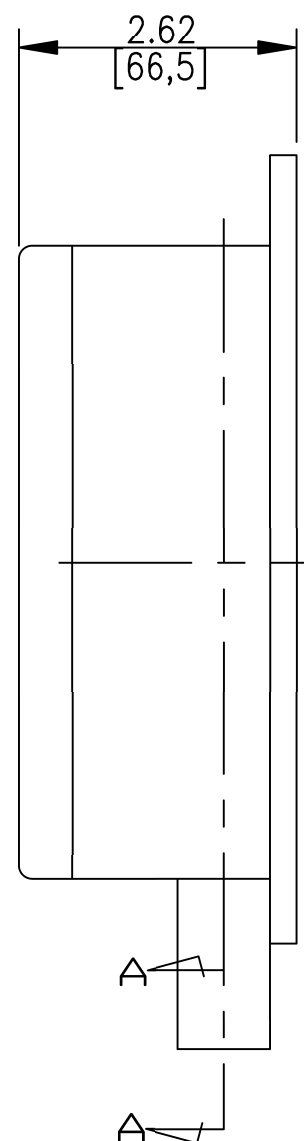
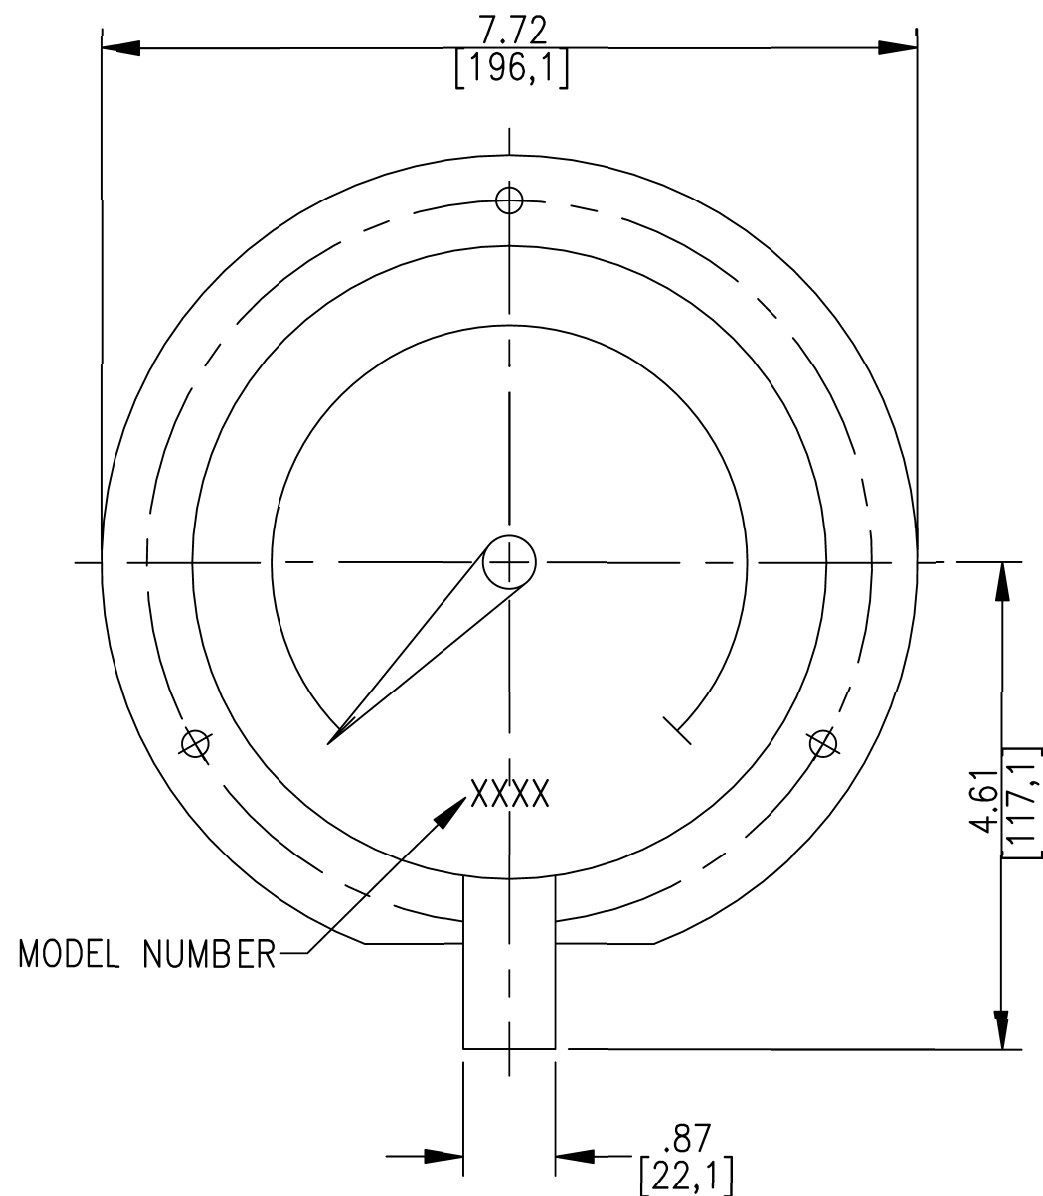




DIAL DIVISIONS
 MAJOR: 5000 PSI/ 500 BAR
 INTERMEDIATE: 1000 PSI/ 100 BAR
 MINOR: 500 PSI/ 50 BAR
 NUMBERS 0-5000-10000-15000-20000-25000
 30000-35000-40000-45000-50000/
 0-500-1000-1500-2000-2500-3000-3500
 RANGE: 0-50000 P.S.I./ 0 - 3500 BAR
 CONNECTION: AUTOCLAVE 1/4" F-250-C
 (.562-18 INTERNAL THREAD) CARBON STEEL
 OPERATING TEMP.: -10°F TO +140°F
 (-25°C TO +60°C)
 ACCURACY ±1.5% FULL SCALE
 CASE: 304 STAINLESS STEEL MATTE
 WINDOW: POLYCARBONATE
 POINTERS: ADJUSTABLE POINTER
 DRAG POINTER W/NON-REMOVABLE KEY

9706003 B R&R 08-17-01/MP	DATE	DIMENSIONS IN BRACKETS ARE IN [mm]		ENERPAC. 		13000 WEST SILVER SPRING DR. BUTLER, WISCONSIN 53007	
	CHANGES	Specification Sheet		 		DESCRIPTION TEST SYSTEM GAUGE 0-50000 P.S.I.	
	ECO	MODEL NO.	T6011L	DR. MP	DATE 07/09/97	DRAWING NO. ID1932 (B)	9/93 B
				CH. GJB	DATE 3/20/98		

135074A