
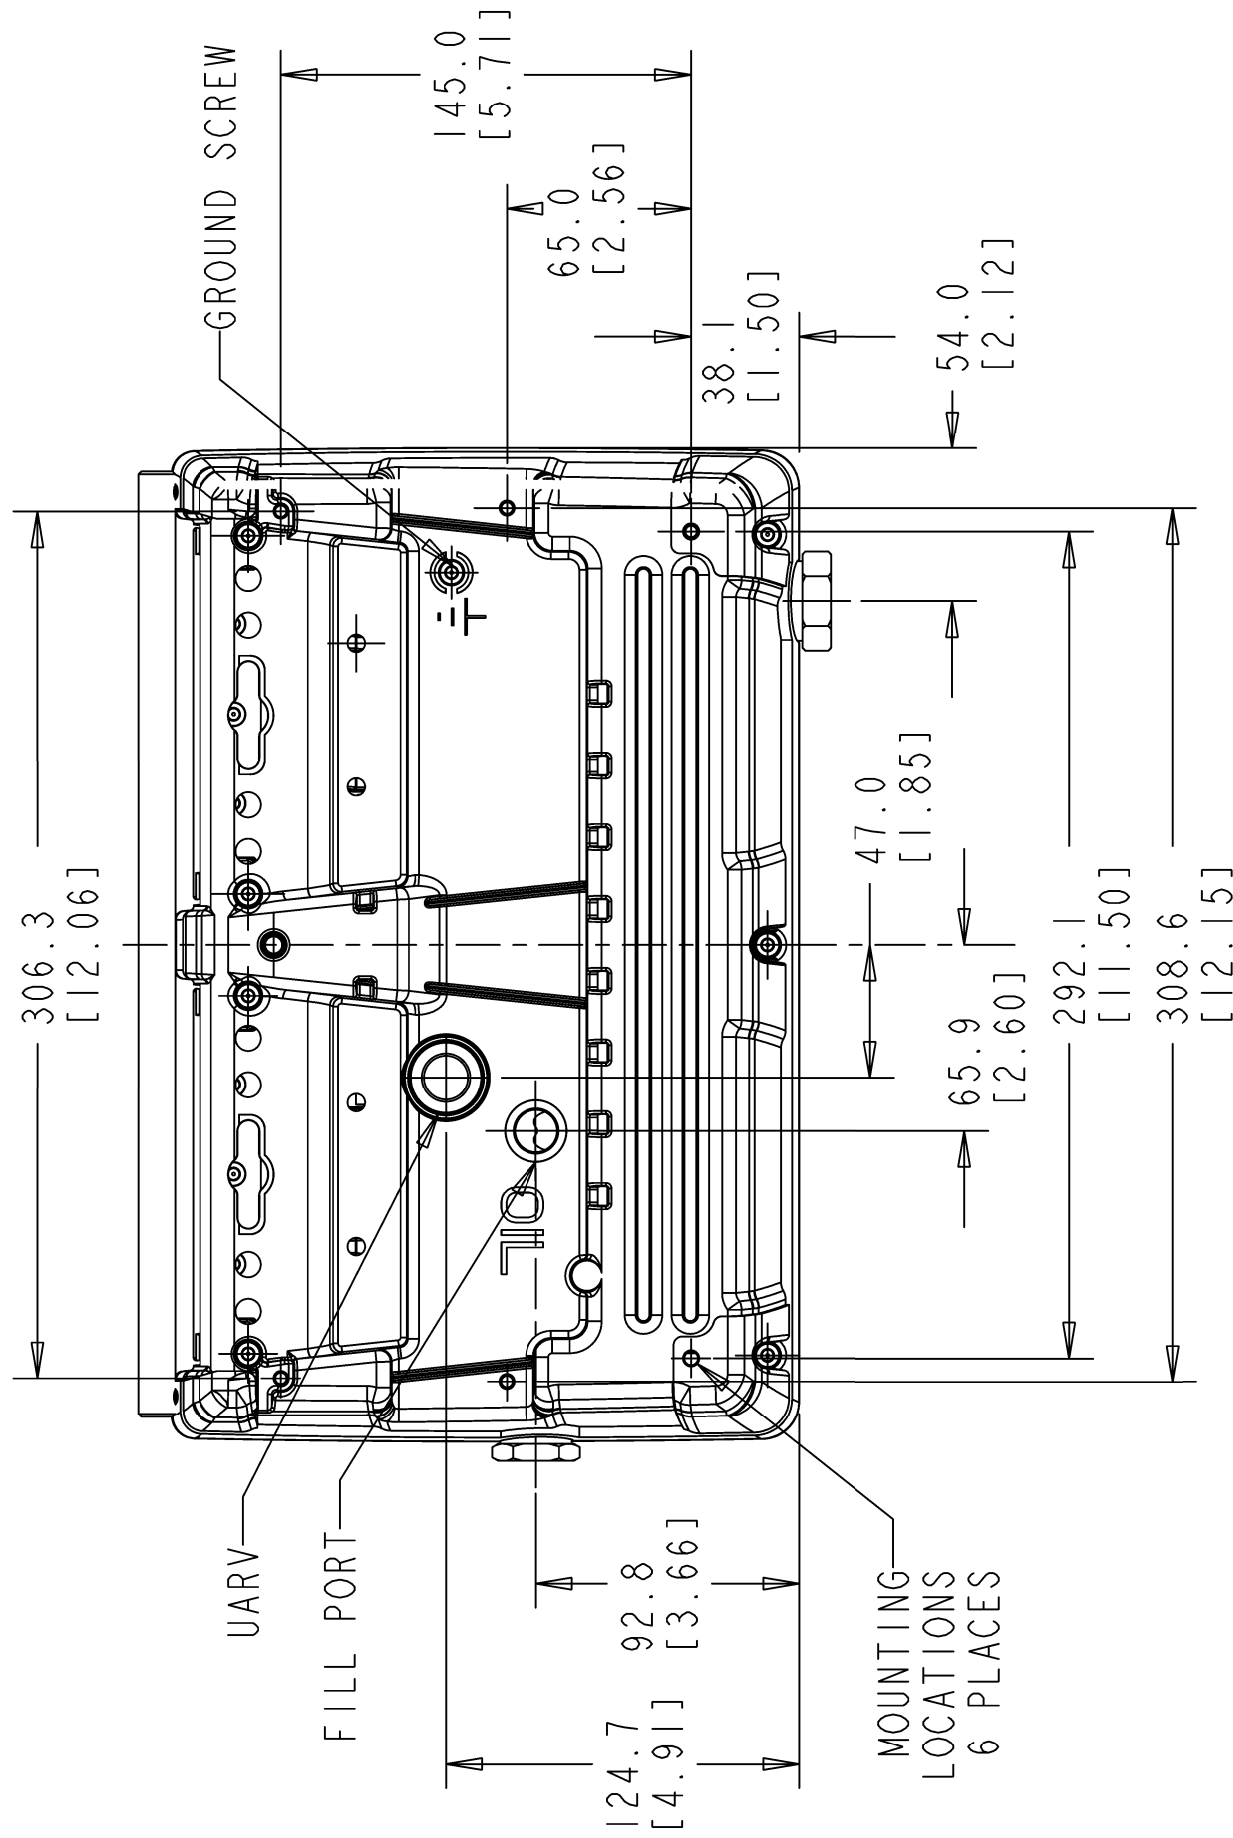
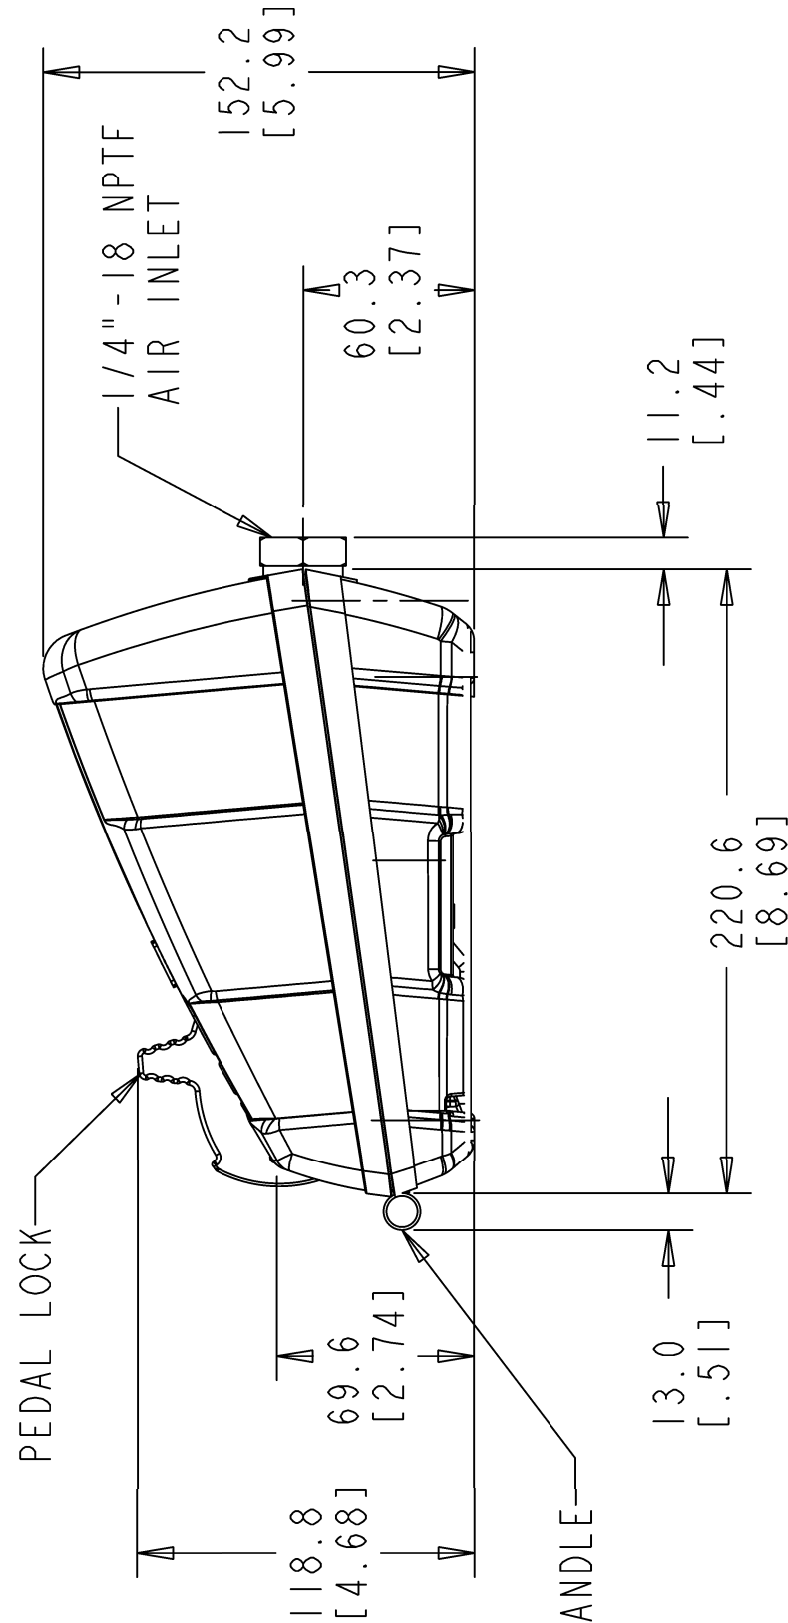
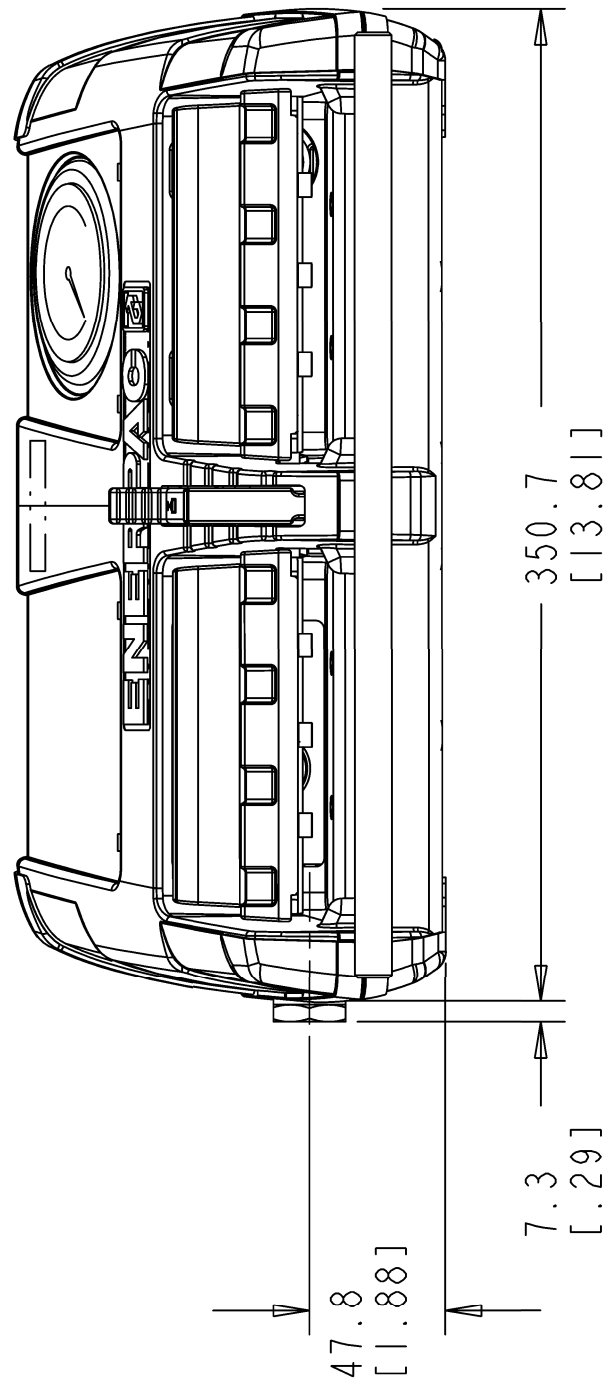


4

3

2

1

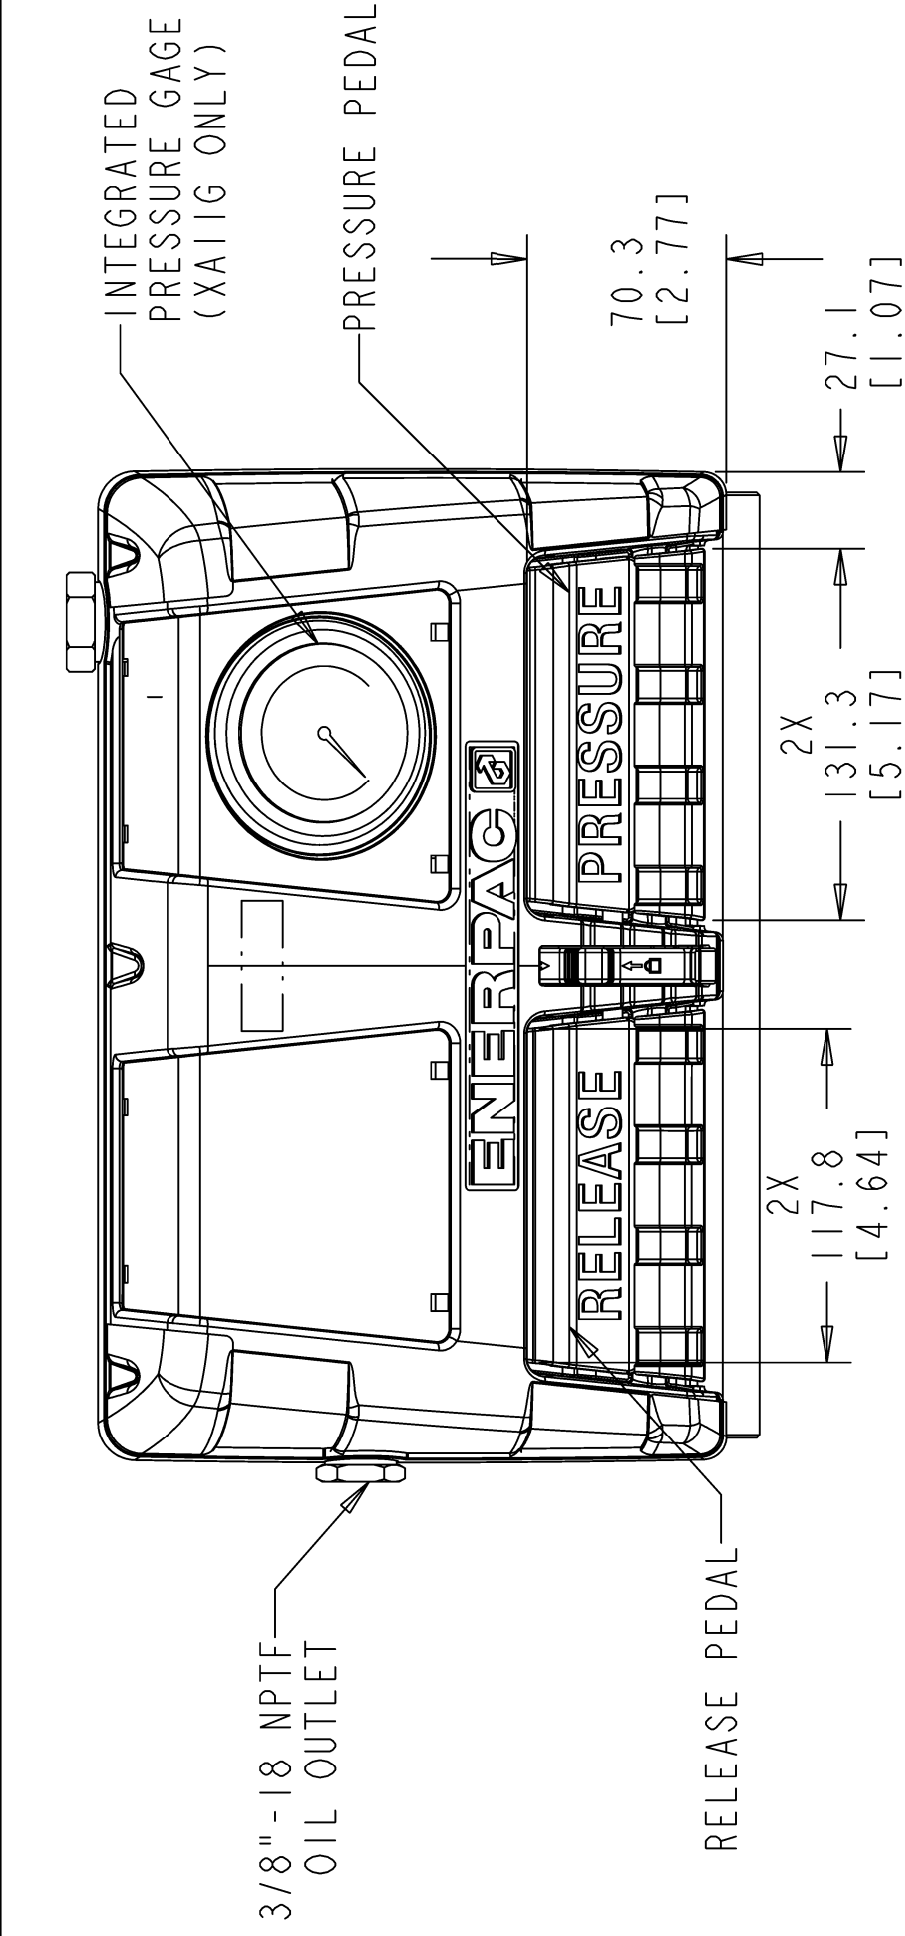

MODEL # NO.	FOR USE WITH CYLINDER TOOL	USABLE OIL CAPACITY	INTEGRATED PRESSURE GAUGE	3-WAY, 3-POSITION VALVE	WEIGHT (LBS)
XA11	SINGLE-ACTING	61	NO	YES	19.0
XA11G	SINGLE-ACTING	61	YES	YES	19.4

MAX. PRESSURE (PSI)	OUTPUT FLOW RATE (IN3/MIN)		DYNAMIC AIR PRESSURE (PSI)	AIR CONSUMPTION (SCFM)
	NO LOAD	LOAD		
10,000	120	15	30-125	10-35

ALL DIMENSIONS ARE REFERENCE ONLY

METRIC

THIRD ANGLE PROJECTION

FINISH UNLESS SPECIFIED

R_{eq} (8µm)
In (feet)

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
DECIMALS METRIC
XX ±.01 X X ±0.25mm
XXX ±.005 X XX ±0.1mm
ANGLES ±1°
DO NOT SCALE DRAWING

MATERIAL:
FINISH:
TREATMENT:

DATE

DRAWN BY: SPS

APPROVALS

CHECKER: GKC

ENGR: GKC

DATE

25-Jul-12

DATE

7-25-12

DATE

7-25-12

ENERPAC®

1D11346

ID, XA11 & XA11G

DWG NO.

0.375

Pro/E

1 of 1

SHEET

4

3

2

1