


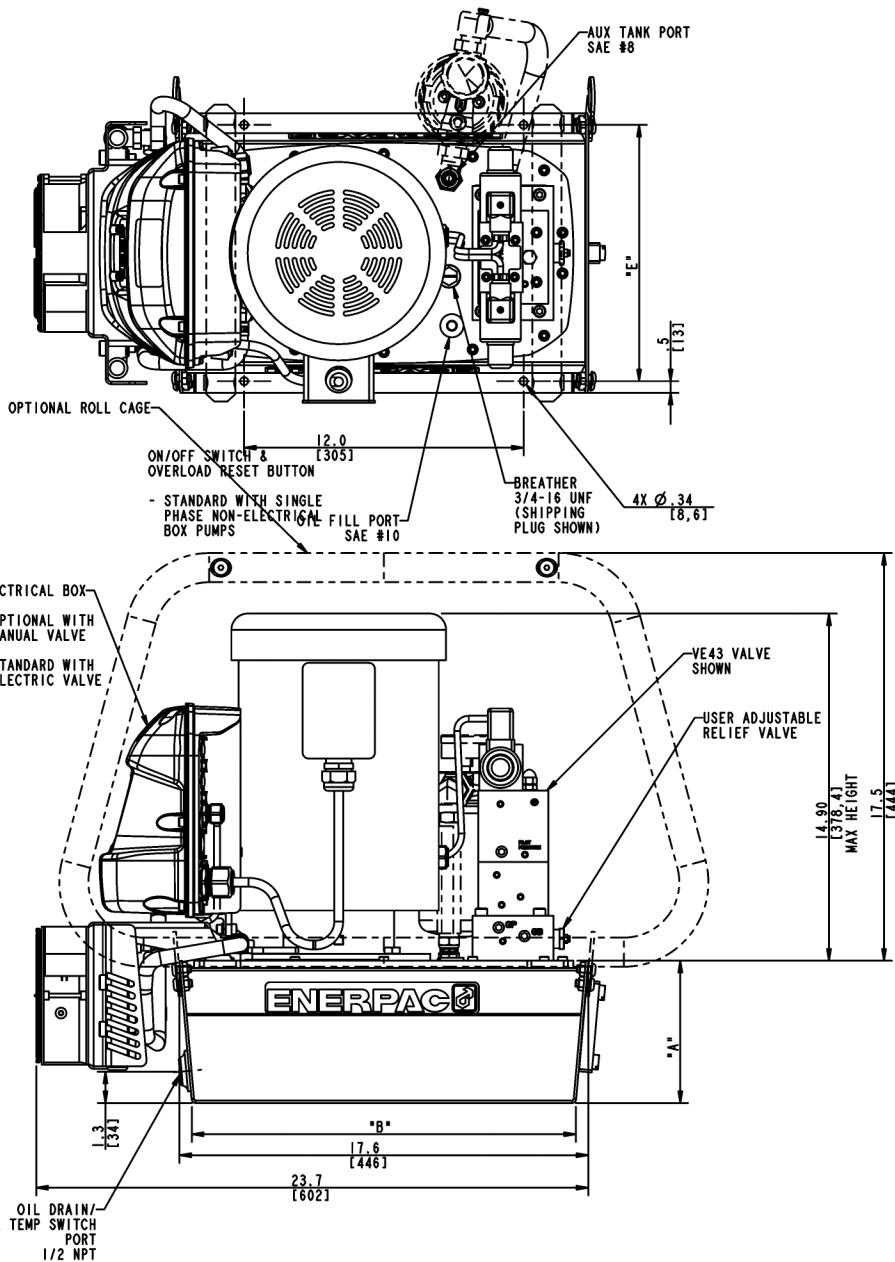


PRODUCT SPECIFICATIONS

TEMPERATURE RANGE	-20° - 122°F [-29° - 50°C]
VISCOSITY RANGE	150-165 S.U.S. [15-250c.St]
HYDRAULIC OIL	ENERPAC HF (ISO GRADE 32)
SEAL MATERIAL	VITON, BUNA-N & URETHANE
MAX PRES STANDARD PUMP	10,000 PSI [689 BAR]
dBa RATING: ZE3-S, ZW4-S	75 dBa
dBa RATING: ZE6	80 dBa
WEIGHT OF HEAT EXCHANGER	9.1 lbs [4.1 kg]

TANK SIZE	"A" in [mm]	"B" in [mm]	"C" in [mm]	"D" in [mm]	"E" in [mm]
2.5 GAL [10 LT]	6.1 [155]	16.5 [419]	12.0 [305]	15.1 [384]	11.0 [279]
5.0 GAL [20 LT]	7.1 [180]	16.3 [414]	16.6 [421]	19.7 [500]	15.6 [396]
10.0 GAL [40 LT]	10.6 [269]	15.7 [399]	19.9 [505]	22.7 [557]	18.9 [480]

NOTE: ALL DIMENSIONS ARE FOR REFERENCE ONLY

WEIGHT W/VE43 NO OPTIONS LBS [kg]			
	2.5 GAL [10 L]	5 GAL [20 L]	10.0 GAL [40 L]
ZE3	125 [57]	152 [69]	203 [92]
ZE4	134 [61]	161 [73]	212 [96]
ZE5	148 [67]	174 [79]	225 [102]
ZE6	187 [85]	213 [97]	212 [120]

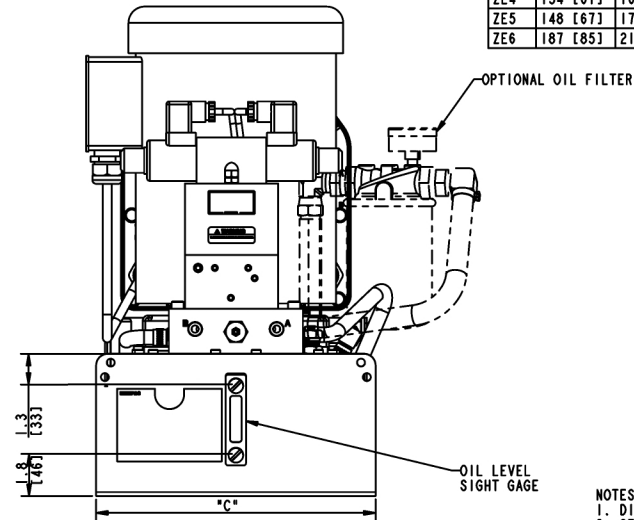

TYPE 'B' - 115V RECEPTACLE	
TYPE 'I' - 230V RECEPTACLE	
TYPE 'E' - 230V RECEPTACLE	
ALL THREE PHASE: POWER CORD CUT FLUSH TO ELECTRICAL BOX	

- NOTES:
1. DIMENSIONS ARE FOR REFERENCE ONLY.
 2. SEE SHEET 2 FOR FLOW AND AMP DRAW INFORMATION.

		720 WEST JAMES STREET COLOMBUS, WI. 53005	
TITLE: ID DRAWING ZE3, ZE4, ZE5, ZE6 10, 20 & 40 LITER RESERVOIRS		SIZE: D 3:8 Pro/E 1 of 2	
DATE: 01-Apr-04 APPROVALS: [Signature] CHECKED: MBO DATE: 01-Apr-04		THIS PRINT AND INFORMATION HEREIN IS CONFIDENTIAL AND PROPRIETARY AND IS THE PROPERTY OF ENERPAC. IT IS NOT TO BE COPIED OR REPRODUCED WITHOUT WRITTEN PERMISSION.	