

ABB BALDOR RELIANCE III

Customer information packet

031913

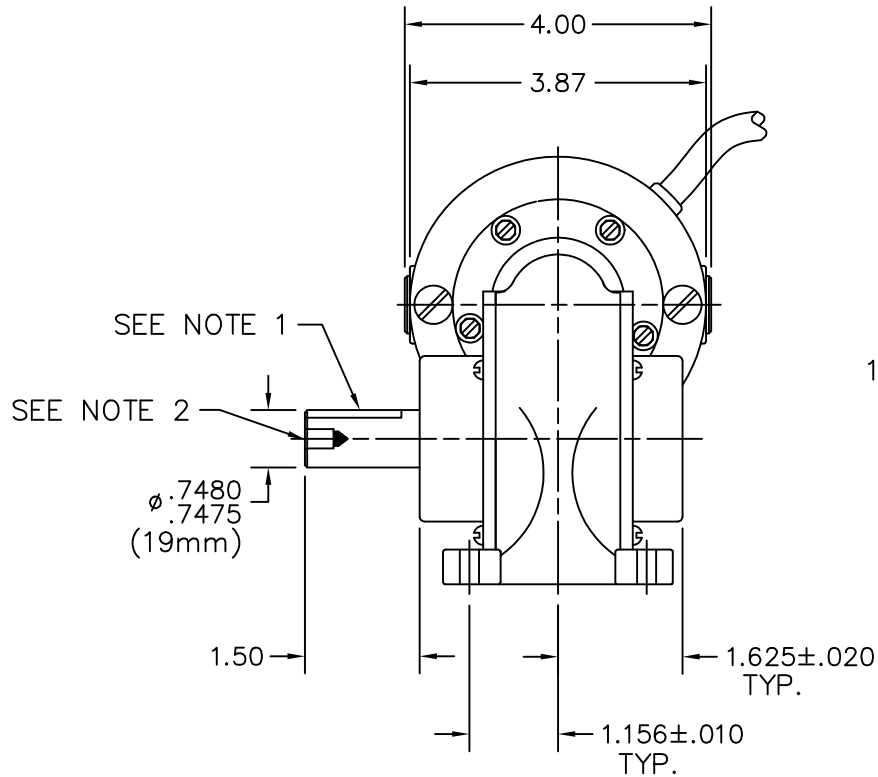
56 DBEC-6-MA-115/230 VAC

MACH. TOL UNLESS SPEC.

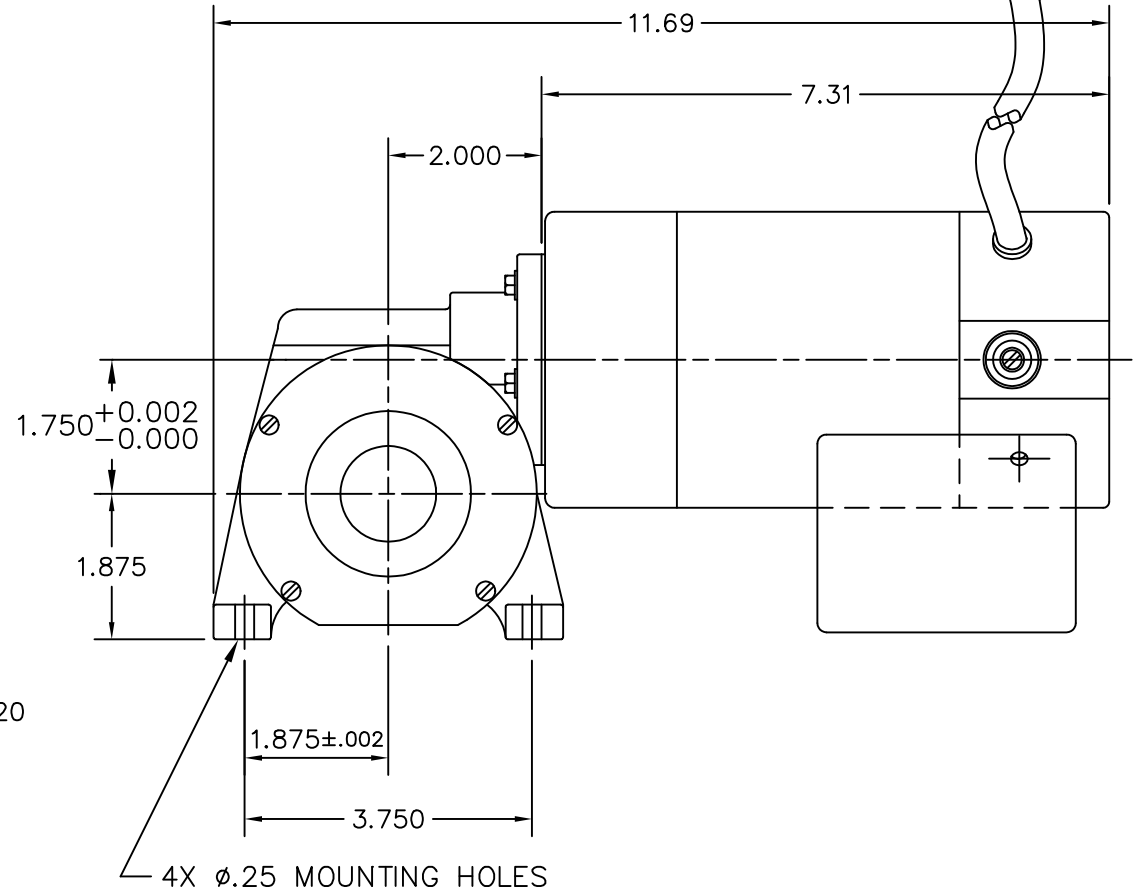
2 PLC DECIMALS = ± 0.010

3 PLC DECIMALS = ± 0.005

ANG= $\pm 5^\circ$ RADII= 0.015 ± 0.005

18-3
7' LONG
BLK #1
BLK #2
GRN/YEL
STRIP JACKET 10"

NOTES:

- 1) KEYWAY IS 5mm X 2.5mm X 32mm
- 2) TAP M6-1 X $\downarrow$ 25mm (1.000 $\pm$ 0.031)



CUST. NAME			CUST. P.O.			CERTIFIED BY			MODEL			INSUL			AMB		
H.P.		MTG		TYPE		R.P.M.		VOLTS		ENCL		PHASE		FREQ		FRAME	
REV. DESC: CORRECT LEAD COLORS									BALDOR ELECTRIC Co.								
REV. LTR: E		BY: RLH		REVISED: 07/11/00 14:1			TDR: 0211920										
Σ161Σ				FILE: CKA00004253			MDL: —		LAYOUT,74 JK TENV GP NONE								
				MTL: —													

Page 2 of 2

BALDOR ELECTRIC Co.

LAYOUT,74 JK TENV GP NONE