

ABB BALDOR RELIANCE III

Customer information packet

3AUA0000132359

ACB530-U1-075A-2


Specifications

Base Type Code	ACB530-U1-075A-2
Enclosure	IP21, UL TYPE 1
Frame	R4
Input Phase	3
Mounting Method	WALL MOUNTED
Normal Duty Continuous Current	74.80 a
Normal Duty Power	25.00 HP
Output Phase	3
Product Series	BALDOR 530
Rated Input Voltage	240.00 V
ACB Block Diagram	3AUA0000135121.PDF
Dimensional Drawing Numbers	3AUA0000133660.PDF
Heavy Duty Continuous Current	59.40 a
Heavy Duty Power	20.00 HP
Input Current Constant Torque	74.80 a
Input Frequency Max.	63 Hz
Input Frequency Min.	48 Hz
Input Voltage Max.	240.00 V
Input Voltage Min.	208.00 V
Output Frequency Max.	500 Hz
Rated Output Voltage Max.	240.00 V

Accessories

Part number	Description	Multiplier
3AUA00000003489	OHDI-01 KIT 115/230V DIGITAL INPUT	
3AUA00000013086	OPMP-01 KIT PANEL MOUNTING PLATFORM	
3AUA00000002388	OCAT-01 CABLE,ETHERNET,CAT5	EG
68294673	ACS/H-CP-EXT PANEL KIT	ES
68829593	ACS/H-CP-EXT-IP66 PANEL KIT	EG
64606891	RDNA-01 DEVICENET OPTION/SP KIT	EG
64606859	RPBA-01 PROFIBUS-DP ADAPTER-KIT	EG
64751727	RETA-01 ETHERNET ADAPTOR MODULE KIT	CM
64751701	BAC, RCNA-01 Option	CT
3AUA00000045102	RECA-01 ETHERCAT MODULE KIT	EG
3AUA00000006791	FMK-A-R4 FLANGE MNT KIT, IP21, R4	
3AUA00000131700	ACB-CP-BA CONTROL PANEL	
3AUA00000015354	ABB-48431-153	
3AUA00000015356	ABB-48431-155	
3AUA00000015357	ABB-48431-156	
3AUA00000015360	ABB-48431-160	
3AUA00000064091	NBBM-V230-A30	

3AUA0000133660

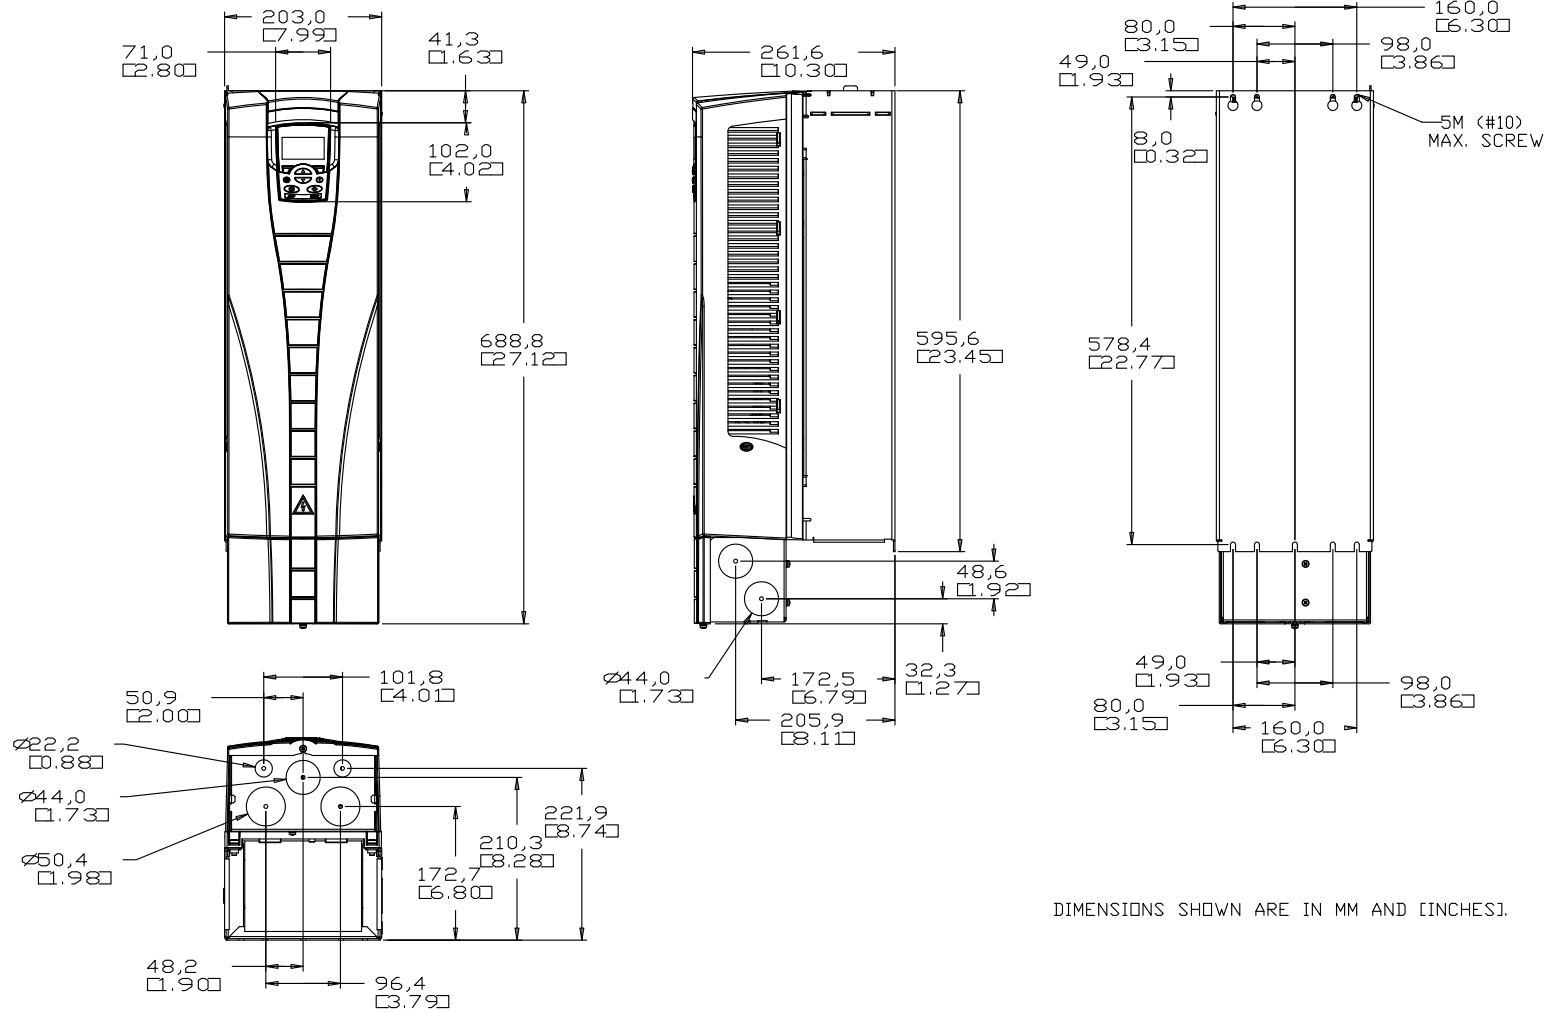

REV. DESC: INITIAL RELEASE		
REV. LTR: A	VERSION: A	TDR: B. AMBY
FILE: 3AUA0000133660	REVISED: 12-11-12	BY: J. GEISS
MTL: 3AUA0000133660		

BALDOR

DRAWING, DIMENSIONAL
ACB530, R4, IP21

3AUA0000133660

3AUA0000135121

