

ABB BALDOR RELIANCE III

Customer information packet

BSM132C-6200AA

BSM132C-6200AA T'STAT, RESOLVER

Specifications


Enclosure	TENV
Nameplate Speed	3500
Agency Approvals	WEEE
Base Indicator	Bracket Mounted
Dimensional Drawing Numbers	S8LYP009
Frame	D132D
Motor Lead Quantity/Wire Size	3 @ 8 AWG
Motor Standards	IEC
Mounting Arrangement	F1
Nameplate Output	9.8KW
Shaft Rotation	Reversible

Part Detail


Revision	AC
Type	AC
Mech. spec.	S8P009
Base	
Status	PRD/A
Elec. spec.	S8WGW019
Layout	S8LYP009
Eff. date	05-13-2025
CD Diagram	CD0006A02
Poles	08
Leads	3#8 Y
Proprietary	False
Created date	07-28-2009

Nameplate

NP3306L				
CAT.NO.	BSM132C-6200AA			
SPEC.	S8P009W019			
MFG.NO.				
TORQ CONT STALL	105 NM			
CUR CONT STALL/A RMS	63			
POWER	15.69KW			
RATED SPEED/RPM(1/MIN)	3500			
RATED BUS VOLTS	650			
MAX SPEED/RPM(1/MIN)	5000			
PEAK CUR/A RMS	201			
MAXIMUM POWER/KW	15.69KW			
TORQ PEAK STALL/NM	315			
TORQ CONSTANT-NM/A	2			
IP	54	IC	410	KG 85

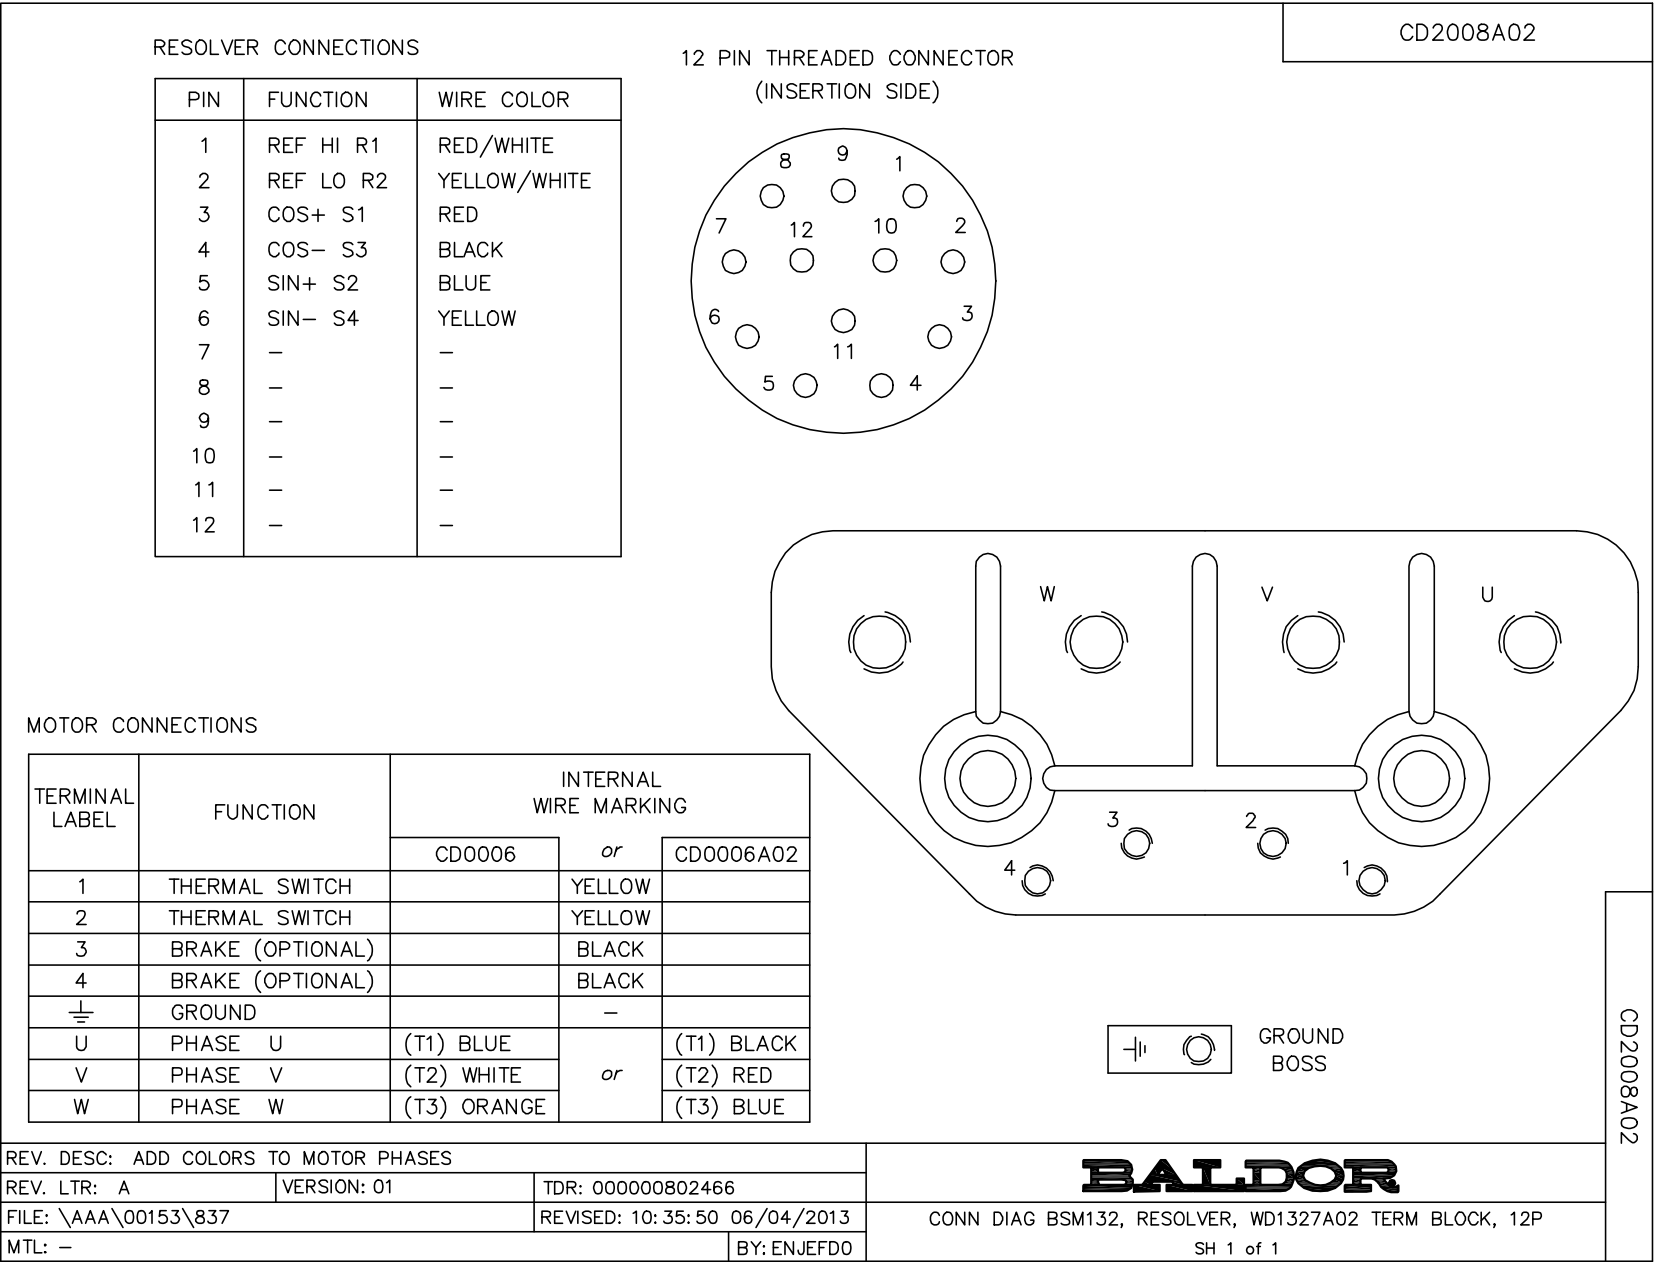

CD0006A02

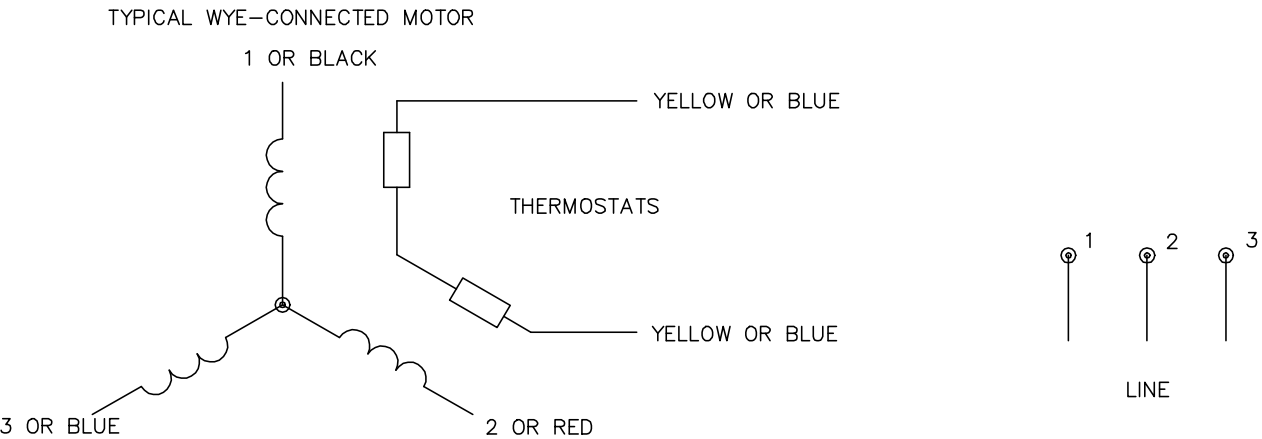

- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.

REV. DESC: REMOVED "OPTIONAL" FROM PRINT, SERVO REQ'S T'STATS		
REV. LTR: D	VERSION: 03	TDR: 000000414937
CD0006A02	FILE: \AAA\00068\606	REVISED: 10:02:28 11/21/2006
	MTL: -	BY: ENJEFO

BALDOR ELECTRIC Co.

3PH, SV, 3 LEADS, WYE CONNECTED

CD0006A02