

ABB BALDOR RELIANCE III

Customer information packet

CDPX3440

.75HP, 1750RPM, DC, 56C, X3435P, XPFC, F1

Class - CLI GP D; CLII GP F,G

Division -

Specifications

Armature Voltage	90 V
Base Speed	1750 rpm
Enclosure	XPFC
Frame	56C
Frame Material	Steel
Haz Area Class and Group	CLI GP D; CLII GP F,G
Output Power	0.750 HP
Agency Approvals	CSA UL UR
Ambient Temperature	40 °C
Armature Current	7.0 a
Armature Inertia	13.657 lb-ft ²
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Drip Cover	No Drip Cover
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
Lifting Lugs	No Lifting Lugs
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	2 @ 14 AWG, A
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Mounting Arrangement	F1
Overall Length	15.87 IN
Product Family	General Purpose
Pulley End Bearing Type	Sealed Bearing
Service Factor	1.00
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End

Part Detail

Revision	AJ
Type	DC
Mech. spec.	34-6519
Base	
Status	PRD/A
Elec. spec.	34WG3675
Layout	34LY6519
Eff. date	06-15-2023
CD Diagram	CD0194
Poles	00
Leads	2#14 A,2#18 JJ Y
Proprietary	False
Created date	01-01-0001

Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger

Nameplate

NP0727XPSL			
NO.			
SER.			
SPEC.	34-6519-3675G1		
CAT.NO.	CDPX3440	T. CODE	T3C
HP	3/4 W	ENCL	XPFC
RPM	1750		
FRAME	56C	TYPE	3435P
ARM V	90	ARM A	7
FLD V		FLD A	
INSUL	F	AMB.	40
DUTY	CONT	SUPPLY	1.5
BRG/DE	6203	BRG/ODE	6203
BRUSHES	2/BP5011CV01		
BLANK			

DC Motor Performance Data

Record # 1430

Typical performance - not guaranteed values

Winding: 34WG3675-R019		Type: 3435P	Enclosure: XPFC
Nameplate Data		General Characteristics	
Rated Output (HP)	0.75	Armature Resistance @ 25°C	0.537 Ω
R.P.M.	1750		
Armature Volts	90		
Armature Amps	7		
Field Volts			
Field Amps			
Rating - Duty	40C AMB-CONT		
Form Factor	1.5		

Load Characteristics at 90 Armature Volts

Load Point	1	2	3	4	5	6
Armature Amps	0.5	5	7.2	9.65	11.7	14.2
R.P.M.	1853	1758	1727	1711	1642	1604
Torque (LB-FT)	0	1.5	2.25	3	3.75	4.5


ABB Motors and Mechanical Inc.

WINDING # 34WG3675

Typical performance - not guaranteed values.

0.75 HP DC 1750 RPM 90 V 3435P

ENCL: XPFC DUTY: CONT CL: F

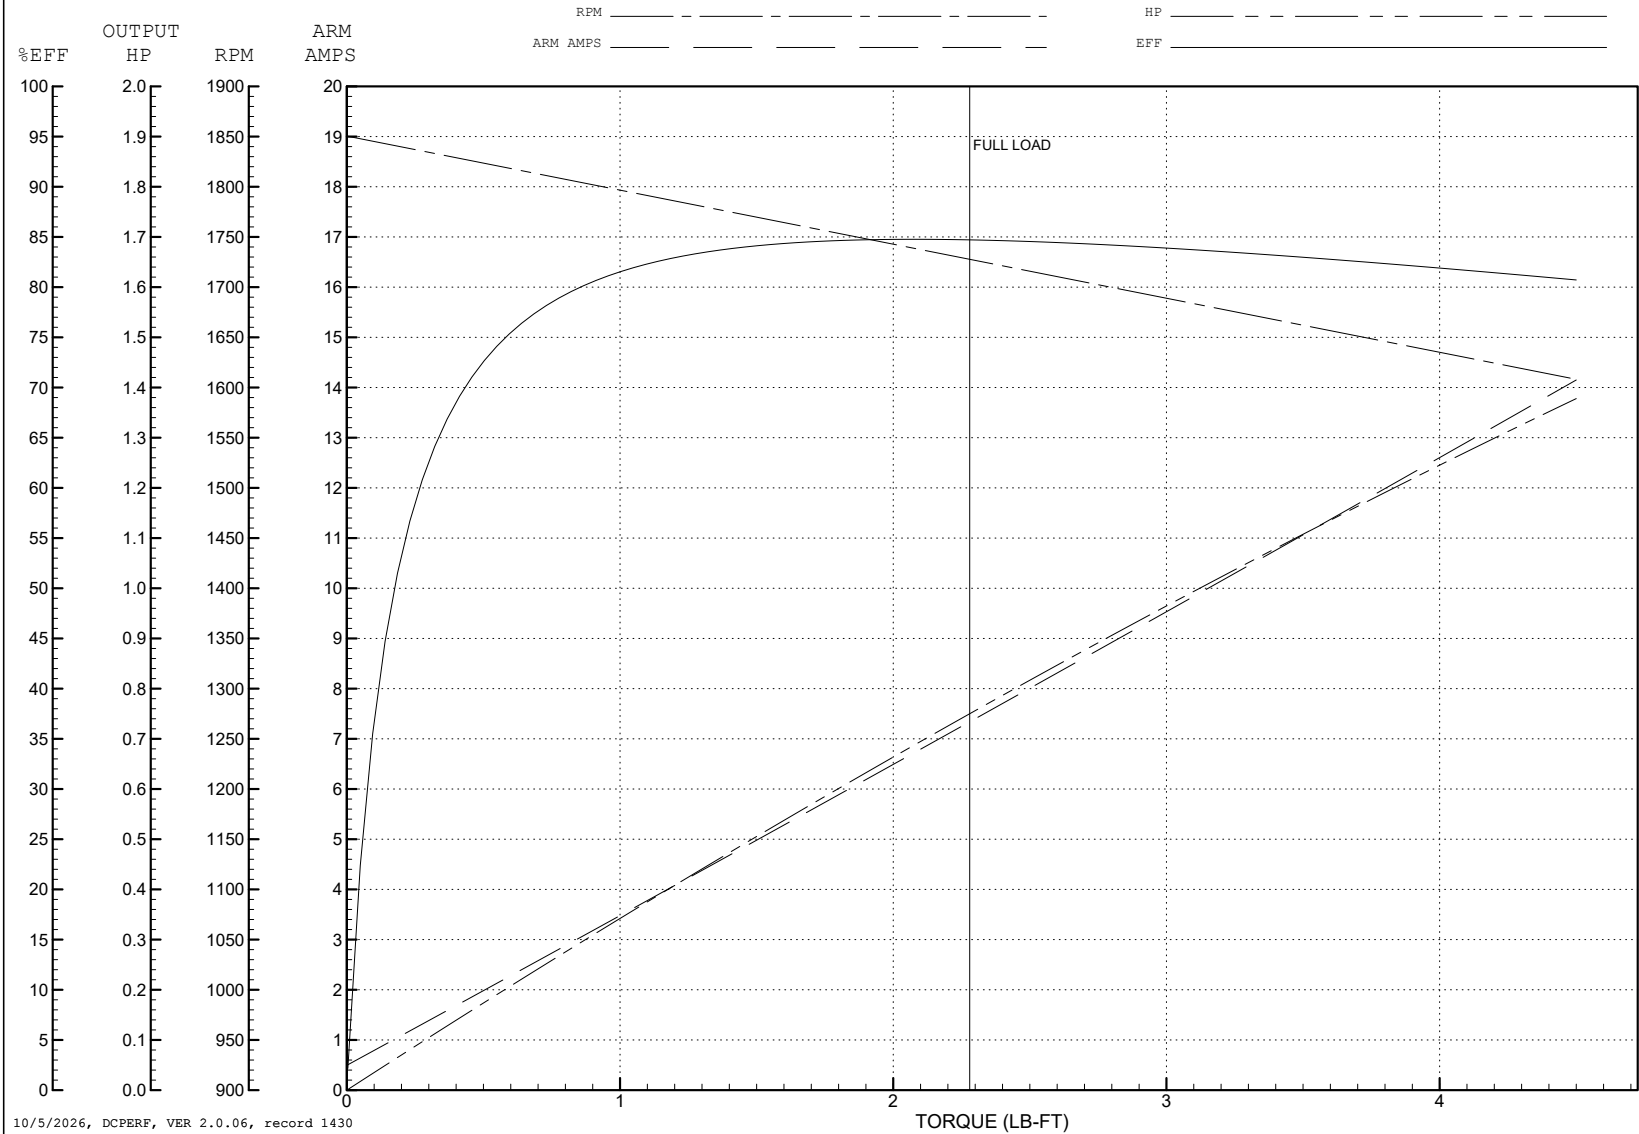

DC Motor Performance Data

Record # 2007

Typical performance - not guaranteed values

Winding: 34WG3675-R019		Type: 3435P	Enclosure: XPFC
Nameplate Data		General Characteristics	
Rated Output (HP)	0.75	Armature Resistance @ 25°C	0.5743 Ω
R.P.M.	1750		
Armature Volts	90		
Armature Amps	7		
Field Volts		Armature Inductance	6.631536 mH
Field Amps			
Rating - Duty	40C AMB-CONT		
Form Factor	1.5		

Load Characteristics at 90 Armature Volts

Load Point	1	2	3	4	5	6	7
Armature Amps	0.49	2.29	3.82	5.49	7.19	9.07	10.71
R.P.M.	1998	1927	1894	1844	1827	1806	1769
Torque (LB-FT)	0	0.563	1.125	1.688	2.25	2.813	3.375


ABB Motors and Mechanical Inc.


WINDING # 34WG3675

Typical performance - not guaranteed values.


0.75 HP DC 1750 RPM 90 V 3435P

ENCL: XPFC DUTY: CONT CL: F

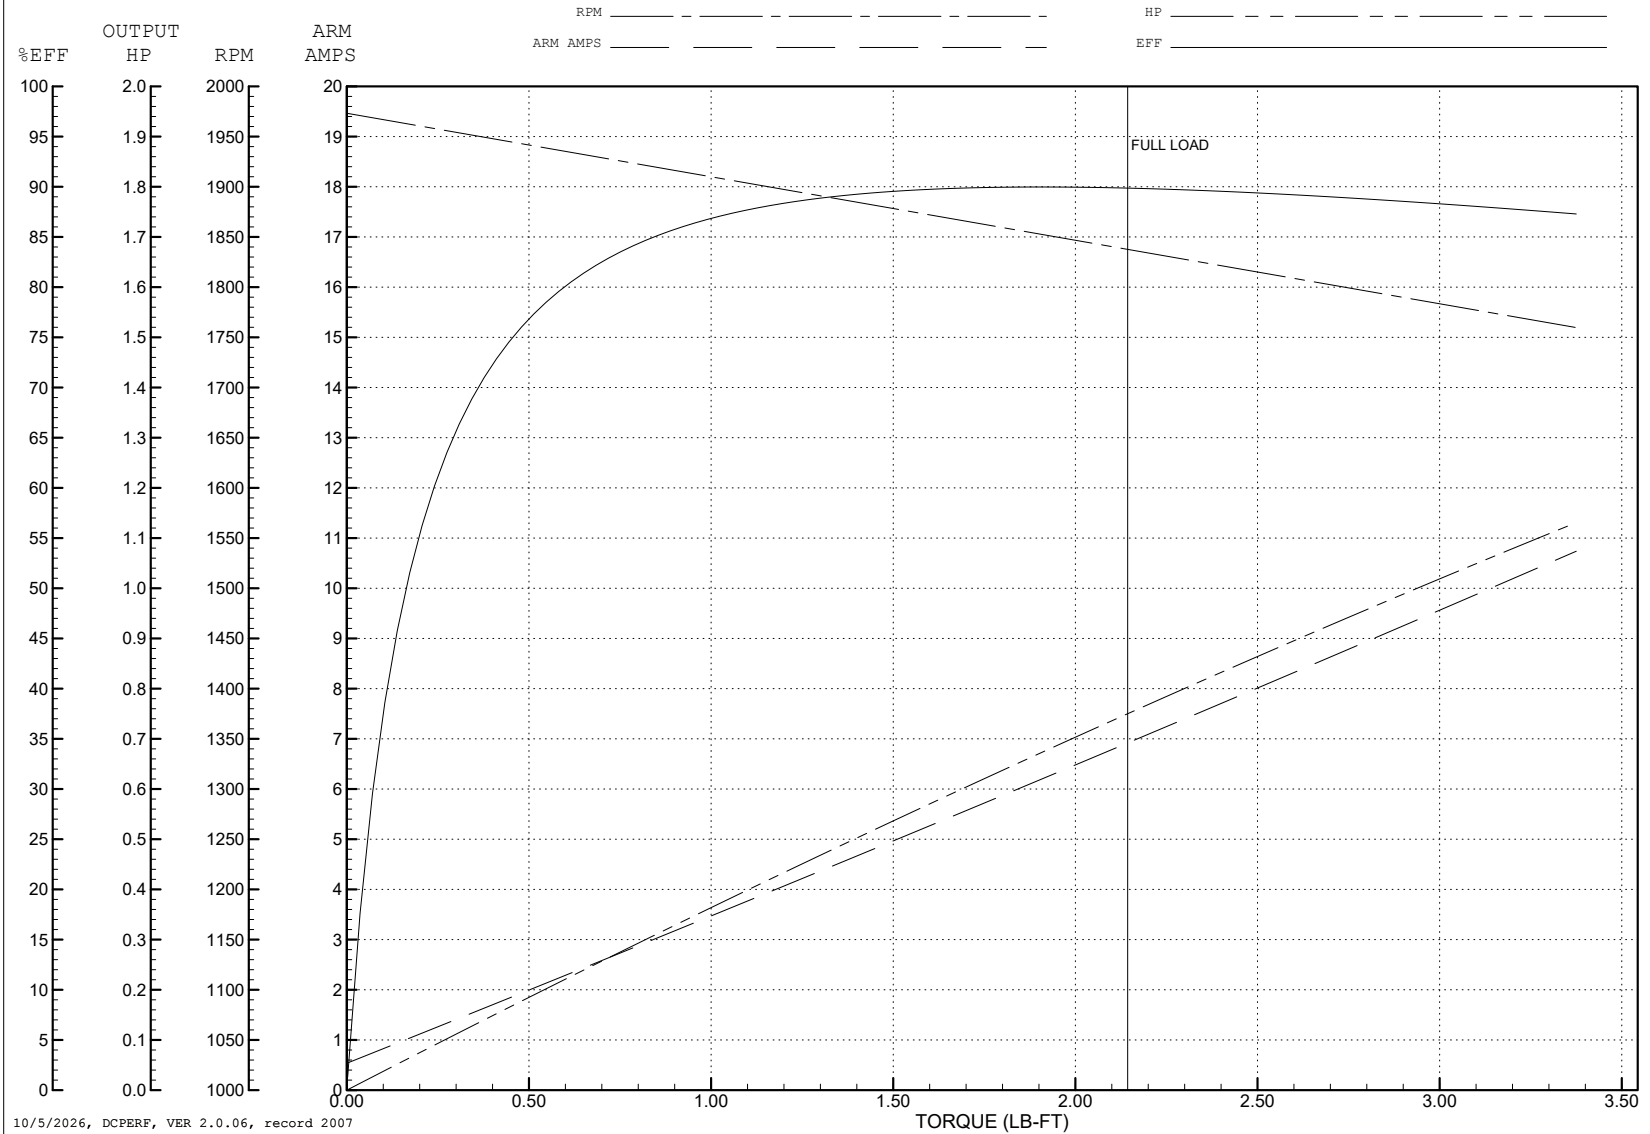

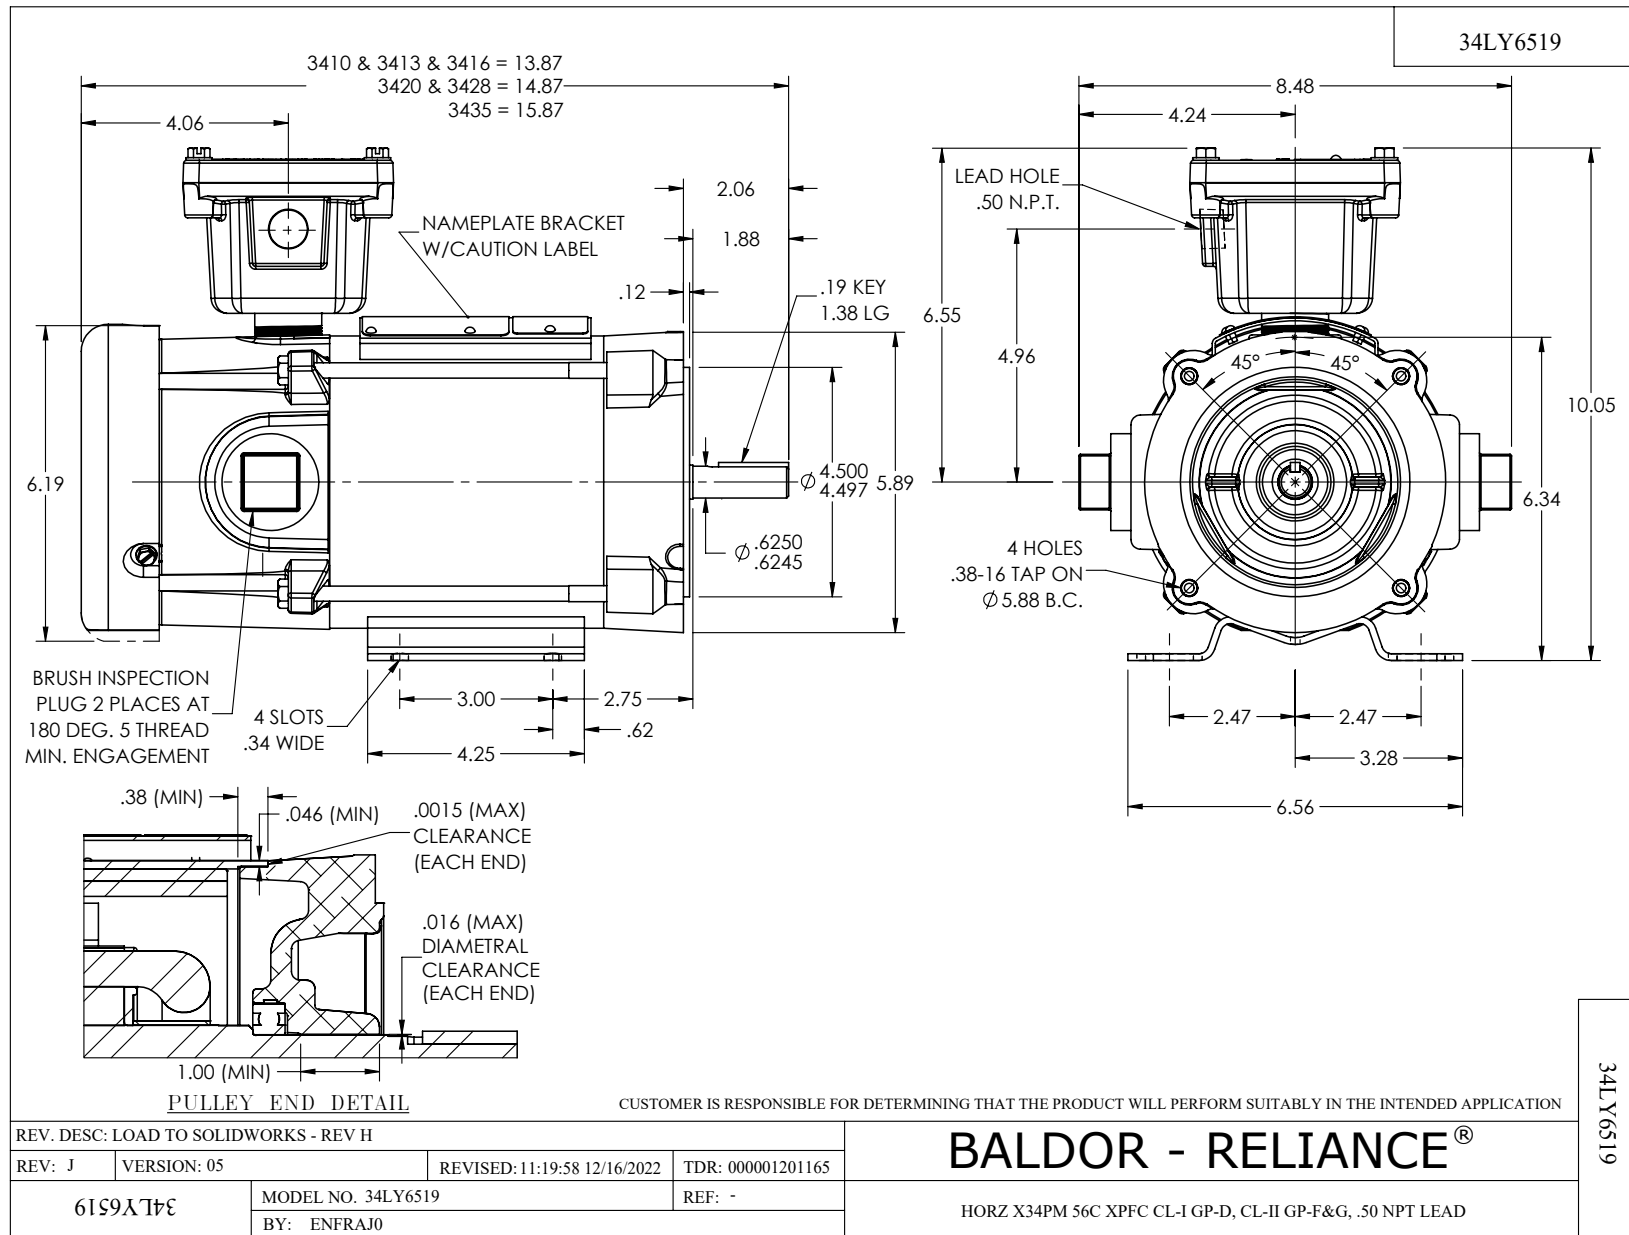

CD0194

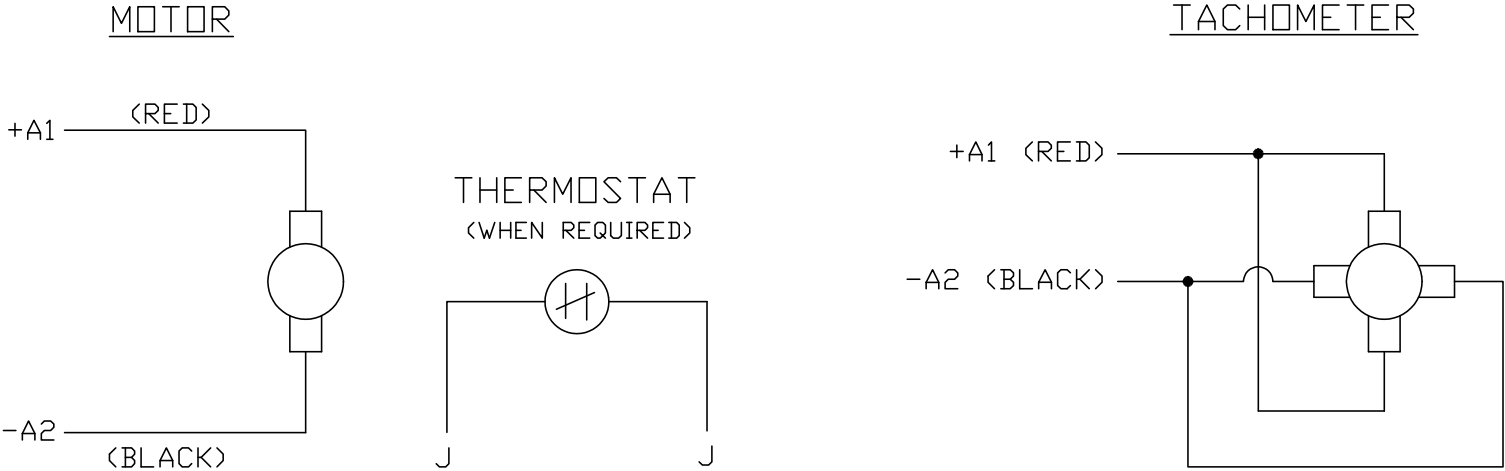

NOTES:

- 1. CCW ROTATION AS SHOWN FACING COMMUTATOR END. TO REVERSE MOTOR ROTATION OR TACHOMETER OUTPUT POLARITY INTERCHANGE LEADS A1(RED) & A2(BLACK)
- 2. LEAD COLORS FOR REFERENCE ONLY & NOT SPECIFIED BY THIS DRAWING. LEAD COLORS SPECIFIED BY LAYOUT DRAWING & BILL OF MATERIAL ONLY.

MATL: -			
REV:	E	ADDED NOTE "LEAD COLORS FOR REFERENCE ONLY &..."	
CD0194		SCALE: -	BY: CK
		FILE: AAA00004503	TDR: 0078737

BALDOR ELECTRIC Co.

CD TYPE P DC PERMANENT MAGNET MOTORS AND TACHOMETERS

CD0194