

ABB BALDOR RELIANCE III

Customer information packet CECP4316T

75HP, 1780RPM, 3PH, 60HZ, 365TC, A36070M, TEFC

Class - None

Division - Division II

Specifications

Enclosure	TEFC
Frame	365TC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	75.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV CURUSEEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	15-60
Current @ Voltage	86.000 A @ 460.0 V 188.000 A @ 208.0 V 172.000 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.4 %
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3
Heater Indicator	No Heater

Part Detail

Revision	H
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A36WG4076
Layout	611740-503-SH1
Eff. date	02-13-2025
CD Diagram	416820-002
Poles	04
Leads	3#4,6#6
Proprietary	False
Created date	05-15-2020

High Voltage Full Load Amps	86.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Motor Lead Quantity/Wire Size	3 @ 4 AWG
Motor Standards	NEMA
Motor Type	A36070M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	33.44 IN
Power Factor	86
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Service Factor	1.15
Shaft Diameter	2.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1780 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate

NP4033LUA																		
CAT #		CECP4316T				SER					CC		010A					
SPEC		A36-7700-4076				RATING		40C AMB-CONT										
HZ		VOLTS		AMPS		RPM		HP	CODE		SF	DES	PF	NEMA NOM. EFF				
60		230/460		172/86		1780		75	G		1.15	B	86	%	95.4	%		
													%		%			
PH	3	CL	F	MAX RPM		4200		MAX CORR KVAR		15.8								
BRG		DE	6313		ODE	6313		ENCL	TEFC		FR	365TC		IP	55			
GREASE		POLYREX EM								MTR WT				LBS				
CL I DIV 2 GRPS A,B,C,D				CL I ZONE 2 GRPS				IIA,IIB,IIC				TEMP T		200	C			
INV READY		CT	15-60		HZ	4:1		VT	3-60		HZ	20:1		CHP	60-90		HZ	1.5:1
INV TEMP CL			200	C	USABLE AT		50HZ 60HP 190/380V 168/84A								SF1.0			

AC Induction motor performance data

Record #71910 - Typical performance - not guaranteed values

Winding	A36WG4076
Type	A3670M
Enclosure	TEFC

Nameplate data

Rated Output	75		
Volts	230 / 460		
Full Load Amps	172 / 86		
R.P.M.	1780		
Hz	60	Phase	3
KVA Code	G		
S.F.	1.15		
NEMA Nom. Eff.	95.4	Power Factor	86
Duty	CONT		
S.F. Amps			

460 V. 60 Hz:

High Voltage Connection


Full Load Torque	220.4 LB-FT
Start Configuration	direct on line
Breakdown Torque	618 LB-FT
Pull-up Torque	341 LB-FT
Locked-rotor Torque	434 LB-FT
Starting Current	545 A
No-load Current	27.5
Line-line Res. @ 25°C	0.081965 Ω
Temp. Rise @ Rated Load	60°C
Temp. Rise @ S.F. Load	75°C
Locked-rotor Power Factor	31.8
Rotor inertia	0

Load Characteristics 460 V, 60 Hz, 75 HP

% of Rated Load	NL	25	50	75	100	125	150	SF
Power Factor	4	55	76	83	86	86	86	86
Efficiency	0	93.8	95.6	95.8	95.4	94.8	93.9	95
Speed	1798.9	1796.6	1791.5	1787.3	1782.2	1776.4	1769.9	1779
Line amperes	27.5	33.9	48.2	66	85.5	107	131	98.4

75 HP 3 PH 60 HZ 1780 RPM 460 V A3670M


TORQUES (LB-FT): PO=618.00 PU=341.00 LR=434.00 LRA=545.00

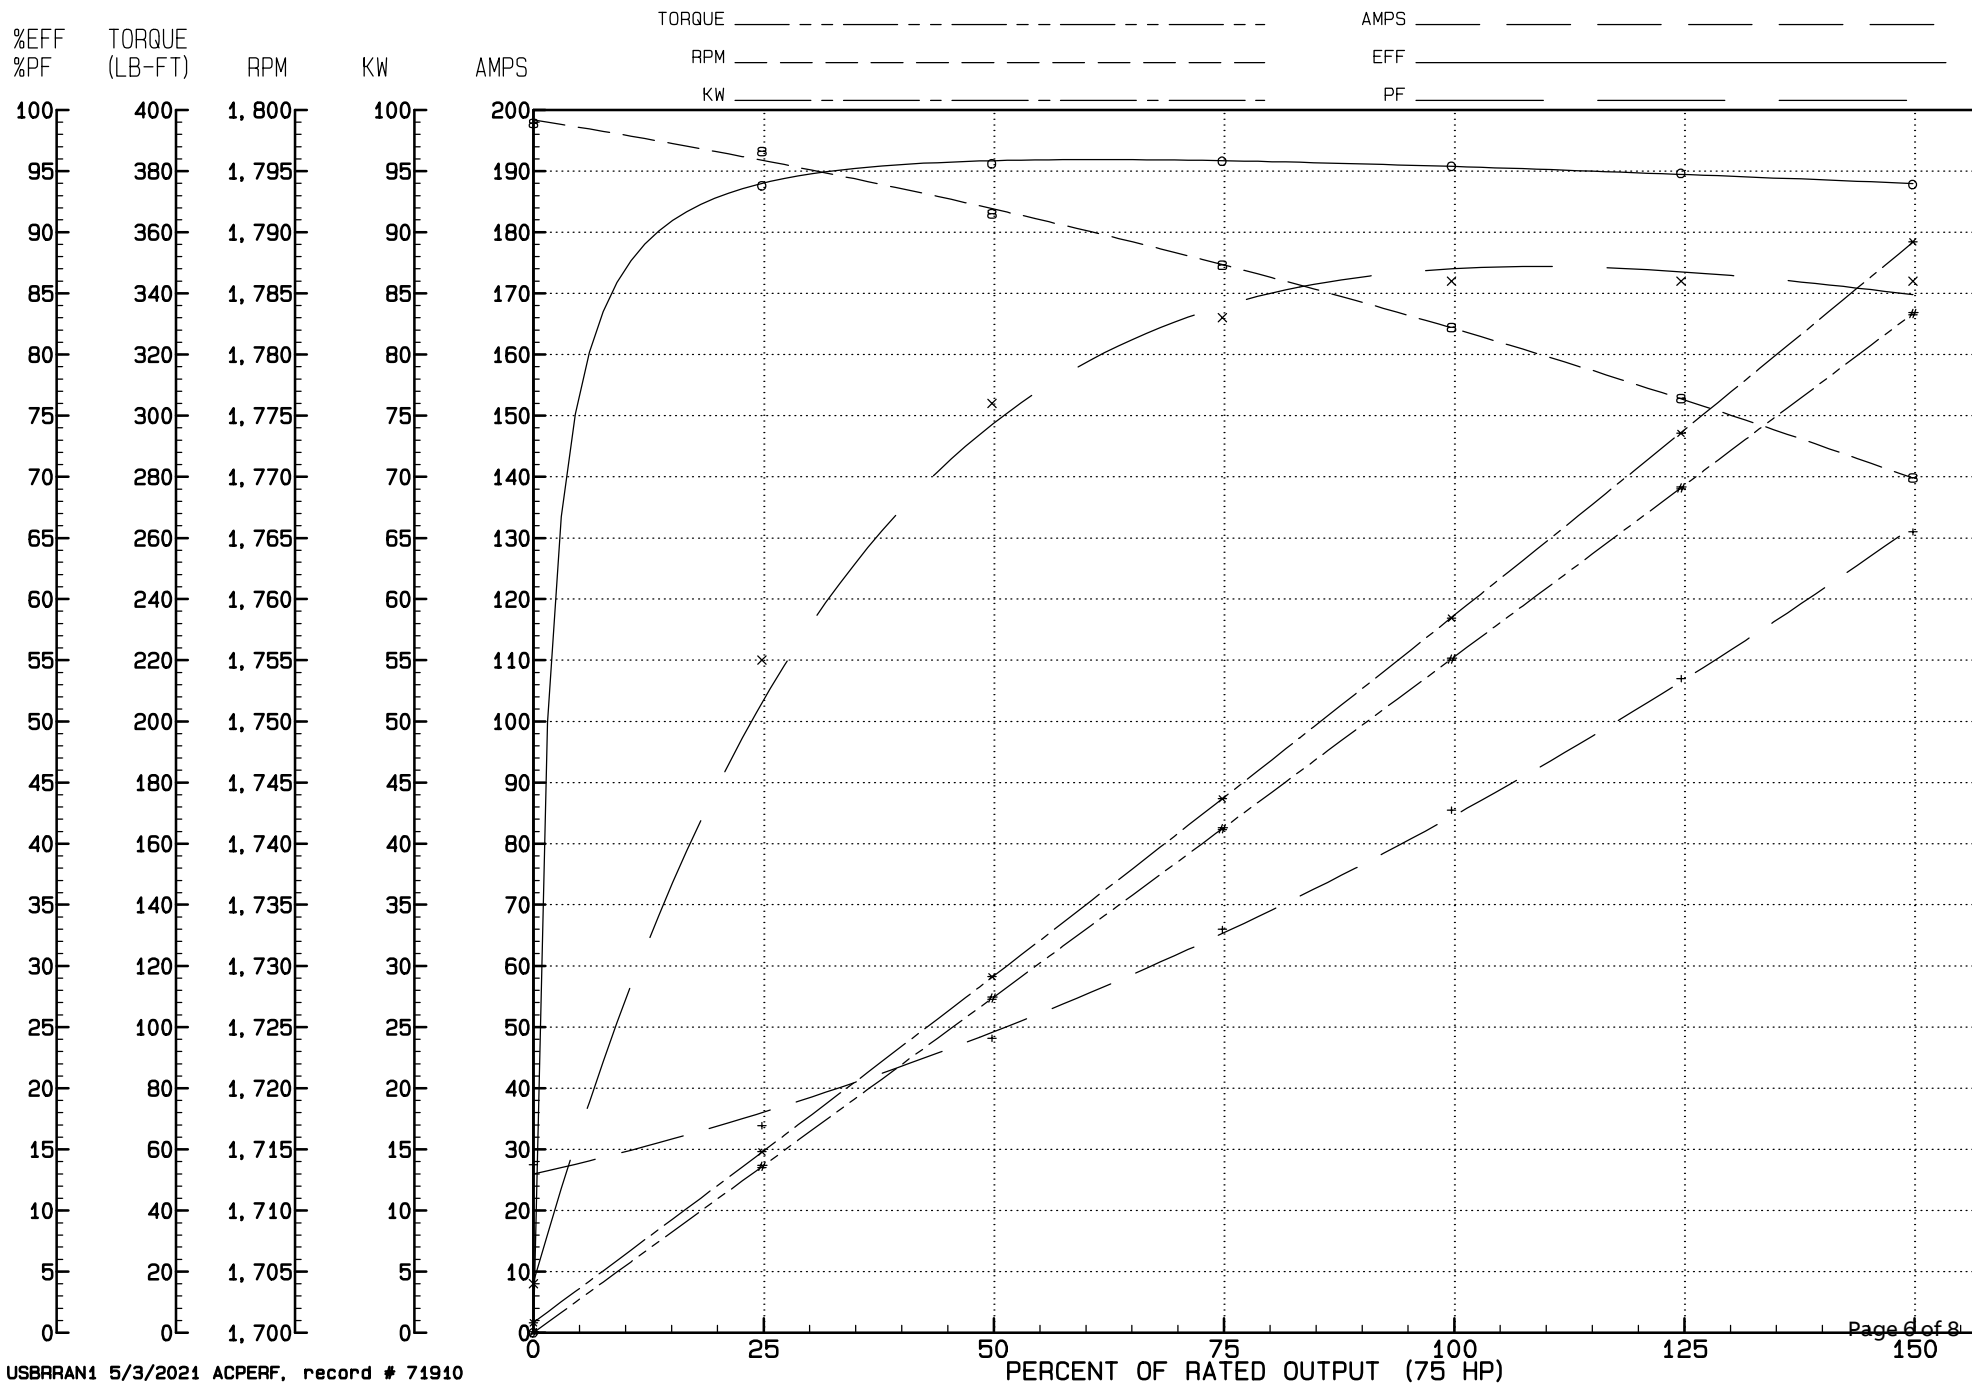

DUTY MASTER ALTERNATING CURRENT MOTORS

SQUIRREL-CAGE INDUCTION

ENCLOSURE: TOTALLY ENCLOSED COOLING: FAN COOLED
MOUNTING: FOOT, NEMA "C" FACE CAST IRON CONSTRUCTION
FRAMES 250TC THRU 440TC

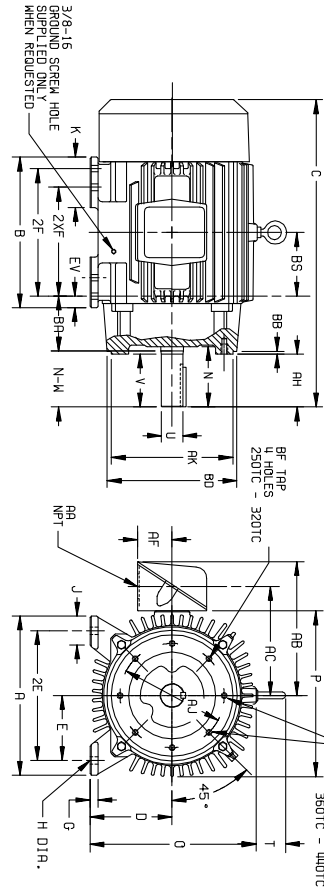

DIMENSIONS ARE IN INCHES, SEE SHEET 2 FOR DIMENSIONS IN MILLIMETERS

	(a)	(b)	(c)	(d)	(e)	(f)	(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)	(s)	(t)	(u)	(v)	(w)	(x)	(y)	(z)	(aa)	(ab)	(ac)	(ad)	(ae)	(af)	(ag)	(ah)	(ai)	(aj)	(ak)	(al)	(am)	(an)	(ao)	(ap)	(aq)	(ar)	(as)	(at)	(au)	(av)	(aw)	(ax)	(ay)	(az)	(ba)	(bb)	(bc)	(bd)	(be)	(bf)	(bg)	(bh)	(bi)	(bj)	(bk)	(bl)	(bm)	(bn)	(bo)	(bp)	(bq)	(br)	(bs)	(bt)	(bu)	(bv)	(bw)	(bx)	(by)	(bz)	(ca)	(cb)	(cc)	(cd)	(ce)	(cf)	(cg)	(ch)	(ci)	(cj)	(ck)	(cl)	(cm)	(cn)	(co)	(cp)	(cq)	(cr)	(cs)	(ct)	(cu)	(cv)	(cw)	(cx)	(cy)	(cz)	(da)	(db)	(dc)	(dd)	(de)	(df)	(dg)	(dh)	(di)	(dj)	(dk)	(dl)	(dm)	(dn)	(do)	(dp)	(dq)	(dr)	(ds)	(dt)	(du)	(dv)	(dw)	(dx)	(dy)	(dz)	(ea)	(eb)	(ec)	(ed)	(ee)	(ef)	(eg)	(eh)	(ei)	(ej)	(ek)	(el)	(em)	(en)	(eo)	(ep)	(eq)	(er)	(es)	(et)	(eu)	(ev)	(ew)	(ex)	(ey)	(ez)	(fa)	(fb)	(fc)	(fd)	(fe)	(ff)	(fg)	(fh)	(fi)	(fj)	(fk)	(fl)	(fm)	(fn)	(fo)	(fp)	(fq)	(fr)	(fs)	(ft)	(fu)	(fv)	(fw)	(fx)	(fy)	(fz)	(ga)	(gb)	(gc)	(gd)	(ge)	(gf)	(gg)	(gh)	(gi)	(gj)	(gk)	(gl)	(gm)	(gn)	(go)	(gp)	(gq)	(gr)	(gs)	(gt)	(gu)	(gv)	(gw)	(gx)	(gy)	(gz)	(ha)	(hb)	(hc)	(hd)	(he)	(hf)	(hg)	(hh)	(hi)	(hj)	(hk)	(hl)	(hm)	(hn)	(ho)	(hp)	(hq)	(hr)	(hs)	(ht)	(hu)	(hv)	(hw)	(hx)	(hy)	(hz)	(ia)	(ib)	(ic)	(id)	(ie)	(if)	(ig)	(ih)	(ii)	(ij)	(ik)	(il)	(im)	(in)	(io)	(ip)	(iq)	(ir)	(is)	(it)	(iu)	(iv)	(iw)	(ix)	(iy)	(iz)	(ja)	(jb)	(jc)	(jd)	(je)	(jf)	(jg)	(jh)	(ji)	(jj)	(jk)	(jl)	(jm)	(jn)	(jo)	(jp)	(jq)	(jr)	(js)	(jt)	(ju)	(jv)	(jw)	(jx)	(jy)	(jz)	(ka)	(kb)	(kc)	(kd)	(ke)	(kf)	(kg)	(kh)	(ki)	(kj)	(kk)	(kl)	(km)	(kn)	(ko)	(kp)	(kq)	(kr)	(ks)	(kt)	(ku)	(kv)	(kw)	(kx)	(ky)	(kz)	(la)	(lb)	(lc)	(ld)	(le)	(lf)	(lg)	(lh)	(li)	(lj)	(lk)	(ll)	(lm)	(ln)	(lo)	(lp)	(lq)	(lr)	(ls)	(lt)	(lu)	(lv)	(lw)	(lx)	(ly)	(lz)	(ma)	(mb)	(mc)	(md)	(me)	(mf)	(mg)	(mh)	(mi)	(mj)	(mk)	(ml)	(mm)	(mn)	(mo)	(mp)	(mq)	(mr)	(ms)	(mt)	(mu)	(mv)	(mw)	(mx)	(my)	(mz)	(na)	(nb)	(nc)	(nd)	(ne)	(nf)	(ng)	(nh)	(ni)	(nj)	(nk)	(nl)	(nm)	(nn)	(no)	(np)	(nq)	(nr)	(ns)	(nt)	(nu)	(nv)	(nw)	(nx)	(ny)	(nz)	(oa)	(ob)	(oc)	(od)	(oe)	(of)	(og)	(oh)	(oi)	(oj)	(ok)	(ol)	(om)	(on)	(oo)	(op)	(oq)	(or)	(os)	(ot)	(ou)	(ov)	(ow)	(ox)	(oy)	(oz)	(pa)	(pb)	(pc)	(pd)	(pe)	(pf)	(pg)	(ph)	(pi)	(pj)	(pk)	(pl)	(pm)	(pn)	(po)	(pp)	(pq)	(pr)	(ps)	(pt)	(pu)	(pv)	(pw)	(px)	(py)	(pz)	(qa)	(qb)	(qc)	(qd)	(qe)	(qf)	(qg)	(qh)	(qi)	(qj)	(qk)	(ql)	(qm)	(qn)	(qo)	(qp)	(qq)	(qr)	(qs)	(qt)	(qu)	(qv)	(qw)	(qx)	(qy)	(qz)	(ra)	(rb)	(rc)	(rd)	(re)	(rf)	(rg)	(rh)	(ri)	(rj)	(rk)	(rl)	(rm)	(rn)	(ro)	(rp)	(rq)	(rr)	(rs)	(rt)	(ru)	(rv)	(rw)	(rx)	(ry)	(rz)	(sa)	(sb)	(sc)	(sd)	(se)	(sf)	(sg)	(sh)	(si)	(sj)	(sk)	(sl)	(sm)	(sn)	(so)	(sp)	(sq)	(sr)	(ss)	(st)	(su)	(sv)	(sw)	(sx)	(sy)	(sz)	(ta)	(tb)	(tc)	(td)	(te)	(tf)	(tg)	(th)	(ti)	(tj)	(tk)	(tl)	(tm)	(tn)	(to)	(tp)	(tq)	(tr)	(ts)	(tt)	(tu)	(tv)	(tw)	(tx)	(ty)	(tz)	(ua)	(ub)	(uc)	(ud)	(ue)	(uf)	(ug)	(uh)	(ui)	(uj)	(uk)	(ul)	(um)	(un)	(uo)	(up)	(uq)	(ur)	(us)	(ut)	(uu)	(uv)	(uw)	(ux)	(uy)	(uz)	(va)	(vb)	(vc)	(vd)	(ve)	(vf)	(vg)	(vh)	(vi)	(vj)	(vk)	(vl)	(vm)	(vn)	(vo)	(vp)	(vq)	(vr)	(vs)	(vt)	(vu)	(vv)	(vw)	(wx)	(wy)	(wz)	(xa)	(xb)	(xc)	(xd)	(xe)	(xf)	(xg)	(xh)	(xi)	(xj)	(xk)	(xl)	(xm)	(xn)	(xo)	(xp)	(xq)	(xr)	(xs)	(xt)	(xu)	(xv)	(xw)	(xx)	(xy)	(xz)	(ya)	(yb)	(yc)	(yd)	(ye)	(yf)	(yg)	(yh)	(yi)	(yj)	(yk)	(yl)	(zm)	(zn)	(zo)	(zp)	(zq)	(zr)	(zs)	(zt)	(zu)	(zv)	(zw)	(zx)	(zy)	(zz)																																													
FRAME	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	AA	AB	AC	AD	AE	AF	AG	AH	AI	AJ	AK	AL	AM	AN	AO	AP	AQ	AR	AS	AT	AV	AW	AX	AY	AZ	BA	BB	BC	BD	BE	BF	BG	BH	BI	BJ	BK	BL	BM	BN	BO	BP	BQ	BR	BS	BT	BV	BW	BX	BY	BZ	CA	CB	CC	CD	CE	CF	CG	CH	CI	CJ	CK	CL	CM	CN	CO	CP	CQ	CR	CS	CT	CU	CV	CW	CX	CY	CZ	DA	DB	DC	DD	DE	DF	DG	DH	DI	DJ	DK	DL	DM	DN	DO	DP	DQ	DR	DS	DT	DU	DV	DW	DX	DY	DZ	EA	EB	EC	ED	EE	EF	EG	EH	EI	EJ	EK	EL	EM	EN	EO	EP	EQ	ER	ES	ET	EU	EV	EW	EX	EY	EZ	FA	FB	FC	FD	FE	FF	FG	FH	FI	FJ	FK	FL	FM	FN	FO	FP	FQ	FR	FS	FT	FU	FV	FW	FX	FY	FZ	GA	GB	GC	GD	GE	GF	GG	GH	GI	GJ	GK	GL	GM	GN	GO	GP	GQ	GR	GS	GT	GU	GV	GW	GX	GY	GZ	HA	HB	HC	HD	HE	HF	HG	HH	HI	HJ	HK	HL	HM	HN	HO	HP	HQ	HR	HS	HT	HU	HV	HW	HX	HY	HZ	IA	IB	IC	ID	IE	IF	IG	IH	II	IJ	IK	IL	IM	IN	IO	IP	IQ	IR	IS	IT	IU	IV	IW	IX	IY	IZ	JA	JB	JC	JD	JE	JF	JG	JH	JI	JJ	JK	JL	JM	JN	JO	JP	JQ	JR	JS	JT	JU	JV	JW	JX	JY	JZ	KA	KB	KC	KD	KE	KF	KG	KH	KI	KJ	KK	KL	KM	KN	KO	KP	KQ	KR	KS	KT	KU	KV	KW	KX	KY	KZ	LA	LB	LC	LD	LE	LF	LG	LH	LI	LJ	LK	LM	LN	LO	LP	LQ	LR	LS	LT	LU	LV	LW	LX	LY	LZ	MA	MB	MC	MD	ME	MF	MG	MH	MI	MJ	MK	ML	MM	MN	MO	MP	MQ	MR	MS	MT	MU	MV	MW	MX	MY	MZ	NA	NB	NC	ND	NE	NF	NG	NH	NI	NJ	NK	NL	NM	NN	NO	NP	NQ	NR	NS	NT	NU	NV	NW	NX	NY	NZ	OA	OB	OC	OD	OE	OF	OG	OH	OI	OJ	OK	OL	OM	ON	OO	OP	OQ	OR	OS	OT	OU	OV	OW	OX	OY	OZ	PA	PB	PC	PD	PE	PF	PG	PH	PI	PJ	PK	PL	PM	PN	PO	PP	PQ	PR	PS	PT	PU	PV	PW	PX	PY	PZ	QA	QB	QC	QD	QE	QF	QG	QH	QI	QJ	QK	QL	QM	QN	QO	QP	QQ	QR	QS	QT	QU	QV	QW	QX	QY	QZ	RA	RB	RC	RD	RE	RF	RG	RH	RI	RJ	RK	RL	RM	RN	RO	RP	RQ	RR	RS	RT	RU	RV	RW	RX	RY	RZ	SA	SB	SC	SD	SE	SF	SG	SH	SI	SJ	SK	SL	SM	SN	SO	SP	SQ	SR	SS	ST	SU	SV	SW	SX	SY	SZ	TA	TB	TC	TD	TE	TF	TG	TH	TI	TJ	TK	TL	TM	TN	TO	TP	TQ	TR	TS	TT	TU	TV	TW	TX	TY	TZ	UA	UB	UC	UD	UE	UF	UG	UH	UI	UJ	UK	UL	UM	UN	UO	UP	UQ	UR	US	UT	UU	UV	UW	UX	UY	UZ	VA	VB	VC	VD	VE	VF	VG	VH	VI	VJ	VK	VL	VM	VN	VO	VP	VQ	VR	VS	VT	VU	VV	VW	VX	VY	VZ	WA	WB	WC	WD	WE	WF	WG	WH	WI	WJ	WK	WL	WM	WN	WO	WP	WQ	WR	WS	WT	WU	WV	WW	WX	WY	WZ	XA	XB	XC	XD	XE	XF	XG	XH	XI	XJ	XK	XL	XM	XN	XO	XP	XQ	XR	XS	XT	XU	XV	XW	XX	XY	XZ	YA	YB	YC	YD	YE	YF	YG	YH	YI	YJ	YK	YL	YM	YN	YO	YP	YQ	YR	YS	YT	YU	YV	YW	YX	YZ	ZA	ZB	ZC	ZD	ZE	ZF	ZG	ZH	ZI	ZJ	ZK	ZL	ZM	ZN	ZO	ZP	ZQ	ZR	ZS	ZT	ZU	ZV	ZW	ZX	ZY	ZZ

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.

REV. DESC: REMOVING TITLEBLOCK		
REV. LTR: A	VERSION: 01	TDR: 000000448517
FILE: \RAG\00004\530	REVISED: 14: 21: 04 11/07/2007	BY: CONBPM
MTI: -		

SITE	C	B5	B	ZF	2NF	N	AH	N(W/2)	SHAFT		AND KEY	SQ.	LGTH.	WEIGHT (5)
									U (3)	V (3)				
2547C	25.06	5.00	12.00	---	8.25	3.75	4.00	1.625	3.75	5.75	2.88	3.45	---	
2567C	25.06	5.00	12.00	10.00	---	4.06	3.75	4.00	1.625	3.75	3.28	3.55	---	
2847C	27.44	5.50	13.00	---	9.50	5.00	4.38	4.62	1.875	4.38	5.00	3.25	485	
2847C	26.06	5.50	13.00	---	---	3.62	3.00	3.25	1.625	3.00	3.75	1.68	485	
2867C	27.44	5.50	13.00	11.00	---	5.00	4.38	4.62	1.875	4.38	5.00	3.25	505	
2867C	26.06	5.50	13.00	11.00	---	3.62	3.00	3.25	1.625	3.00	3.75	1.68	500	
3217C	28.94	6.00	14.75	---	10.50	5.62	5.00	5.25	2.125	5.00	5.00	3.68	605	
3217C	28.94	6.00	14.75	12.00	10.50	4.12	3.50	3.75	1.75	4.50	5.00	4.20	605	
3237C	28.94	6.00	14.75	12.00	---	4.12	3.50	3.75	1.75	4.50	5.00	4.20	645	
3267C	28.94	6.00	14.75	---	11.25	6.25	5.62	5.88	2.375	5.62	6.25	4.25	880	
3617C	33.44	6.12	15.00	---	11.25	6.12	5.50	5.75	1.875	5.50	5.00	4.20	874	
3647C	33.44	6.12	15.00	---	---	6.25	5.62	5.88	2.375	5.62	6.25	4.25	905	
3667C	31.31	6.12	15.00	12.25	---	4.12	3.50	3.75	1.875	4.50	5.00	2.00	899	
3667C	31.31	6.12	15.00	12.25	---	7.50	7.00	7.25	2.875	7.00	7.50	5.62	1265	
4047C	38.31	6.88	16.00	---	12.25	4.50	4.00	4.25	2.125	4.00	5.00	2.75	1256	
4047C	35.31	6.88	16.00	13.75	---	7.50	7.00	7.25	2.875	7.00	7.50	5.62	1305	
4057C	35.31	6.88	16.00	13.75	---	4.50	4.25	4.50	2.125	4.00	5.00	2.75	1296	
4407C	44.62	8.25	19.00	---	14.50	8.50	8.25	8.50	3.375	8.25	8.75	6.88	1736	
4447C	40.88	8.25	19.00	---	14.50	5.19	4.50	4.75	2.375	4.50	6.75	3.00	1722	
4457C	44.62	8.25	19.00	16.50	---	8.94	8.25	8.50	3.375	8.25	8.75	6.88	1928	
4457C	40.88	8.25	19.00	16.50	---	5.19	4.50	4.75	2.375	4.50	6.25	3.00	1912	

- | | | |
|------|---|--|
| (1) | SPECIAL DIMENSIONS APPLYING TO THIS ORIGIN ON THIS LINE | CONDUIT BOX LOCATED ON OPPOSITE SIDE WHEN F=2-W-1 |
| (2) | "a" VARIES — 250TIC — 320TIC + 0.00 — 0.03 | W=4-W-5-W-7, OR C-1 MOUNTING IS SPECIFIED. |
| (3) | "b" VARIES — 360TIC — 440TIC + 0.00 — .06 | |
| (4) | "c" VARIES — UP TO 1.625 DIA. + 0.000, — .0005 | IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT |
| (5) | 1.625 AND LARGER + 0.000, — .001. | FACTORY. |
| (6) | ALL FRAMES HAVE EIGHT MOUNTING HOLES FOR DUAL MOUNTING. | MAXIMUM PERMISSIBLE SHAFT RUNOUT WHEN MEASURED |
| (7) | MOTOR WEIGHTS MAY VARY BY 15% DEPENDING UPON RATING. | AND PERMISSIBLE SHAFT EXTENSION IS .002 IN. UP TO |
| (8) | "AK" VARIES — 320TIC — 280TIC + 0.000, — .003 | AND INCLUDING 1.625 DIA. AND .003 I.I.R.; 1.625 DIA. |
| (9) | "AL" VARIES — 320TIC — 440TIC + 0.000, — .005 | TO 5 INCH DIA. |
| (10) | "N"=W" VARIES +.00, — .25 | FACE RUNOUT AND — 250TIC — 280TIC INCL. .004 MAX. T.I.R. |
| | | ECCENTRICITY — 320TIC — 440TIC INCL. .004 MAX. T.I.R. |



FRAME _____ TYPE _____ CERTIFIED FOR _____
 ORDER _____ ITEM _____ HP _____ RPM _____ PH _____ HZ _____ VOLTS _____
 SALES ORDER _____ APPROVED BY _____ DATE _____

611740-503-SH1

611740-503-SH1

416820-002

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 9 LEAD DELTA-CONNECTED

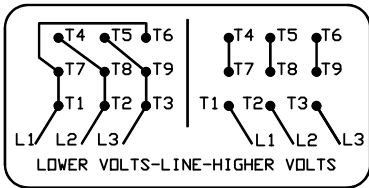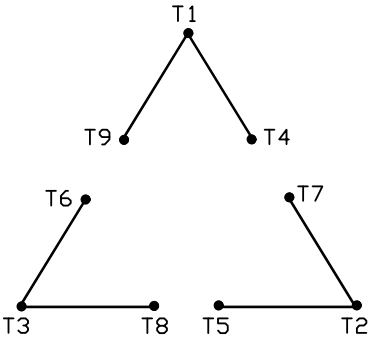

(N. P. 1575-B)

416820-002

REV. DESC: ADJUST TEXT DARKNESS		
REV. LTR: B	VERSION: 02	TDR: 000001285318
FILE: \RAG\00022\453	REVISED: 09:36:26 09/24/2026	BY: USJOSUL
MTL: -	© □	



CONN DIAG - STANDARD 9 LEAD, DELTA-CONNECTED
SH1 of 1