

ABB BALDOR RELIANCE III

Customer information packet

CFSWDM3711T-5E

10HP, 3500RPM, 3PH, 60HZ, 215TC, 3744M, TEFC, F

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	215TC
Frame Material	Stainless Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	10.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	CSA CSA EEV NEMA PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	9.100 A @ 575.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	90.2 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	9.1 a
Insulation Class	H

Part Detail

Revision	N
Type	AC
Mech. spec.	37Q242
Base	
Status	PRD/A
Elec. spec.	37WGR415
Layout	37LYQ242
Eff. date	09-22-2023
CD Diagram	CD0006
Poles	02
Leads	3#14
Proprietary	False
Created date	10-11-2018

Inverter Code	Inverter Ready
KVA Code	M
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	3 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3744M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	20.68 IN
Power Factor	91
Product Family	WD All SS Encapsulated
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3500 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4427AAA02												
CAT #	CFSWDM3711T-5E					WGT		LBS				
SPEC	37Q242R415G1					ENCL	TEFC					
SER #						CC	010A	IP	69			
HP	10	MAG CUR										
VOLTS	575					NEMA NOM. EFF					90.2	
AMPS	9.1					PF	91					
RATING	40C AMB-CONT											
RPM	3500					MAX RPM						
FRAME	215TC	HZ	60		CODE	M	CLASS		H			
SER.F.	1.15	SF AMP					PH	3	DES	A		
DE	6307		ODE	6307								
LUBRICATION	POLYREX EM											
ID LOGO	INVERTER TYPE		VPWM		CHP	60	TO	90		1.5:1		
ID LOGO	WK2	0.4	CT	15	TO	60	4:1					
ID LOGO	SL HZ		VT	6	TO	60	10:1					
						QR						
YR												

AC Induction Motor Performance Data

Record # 40689

Typical performance - not guaranteed values

Winding: 37WGR415-R001			Type: 3744M		Enclosure: TEFC	
Nameplate Data			575 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		10	Full Load Torque		15 LB-FT	
Volts		575	Start Configuration		direct on line	
Full Load Amps		9.1	Breakdown Torque		94.3 LB-FT	
R.P.M.		3500	Pull-up Torque		41.3 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque	49.3 LB-FT	
NEMA Design Code	A	KVA Code	M	Starting Current	104 A	
Service Factor (S.F.)		1.15	No-load Current		3.68 A	
NEMA Nom. Eff.	90.2	Power Factor	91	Line-line Res. @ 25°C	0.979 Ω	
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load		66°C	
S.F. Amps			Temp. Rise @ S.F. Load		79°C	
			Locked-rotor Power Factor		32	
			Rotor inertia		0.402 LB-FT2	

Load Characteristics 575 V, 60 Hz, 10 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	54	76	85	91	90	92	90
Efficiency	81.5	88.6	90.2	91.1	90.4	90.1	90.7
Speed	3580	3558	3537	3513	3490	3464	3499
Line amperes	4.18	5.59	7.25	9.11	11.4	13.6	10.5


ABB Motors and Mechanical Inc.


WINDING # 37WGR415

Typical performance - not guaranteed values.




10 HP 3 PH 60 HZ 3500 RPM 575 V 3744M

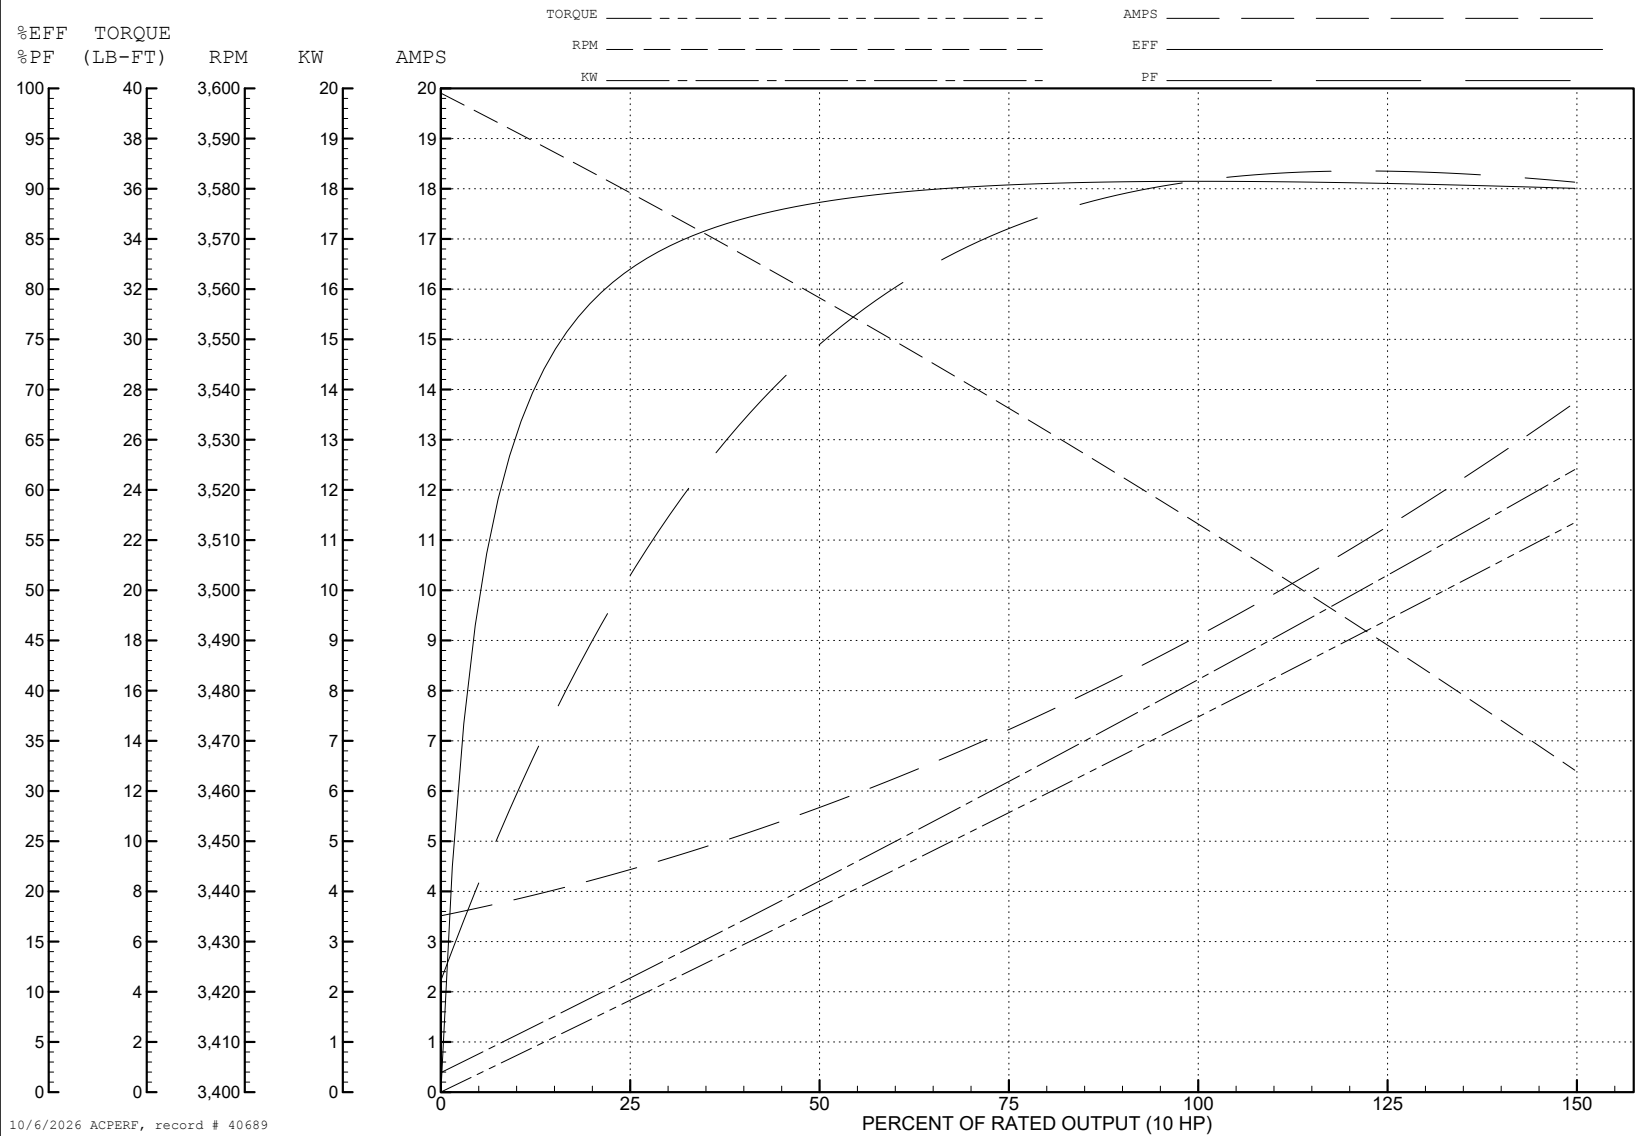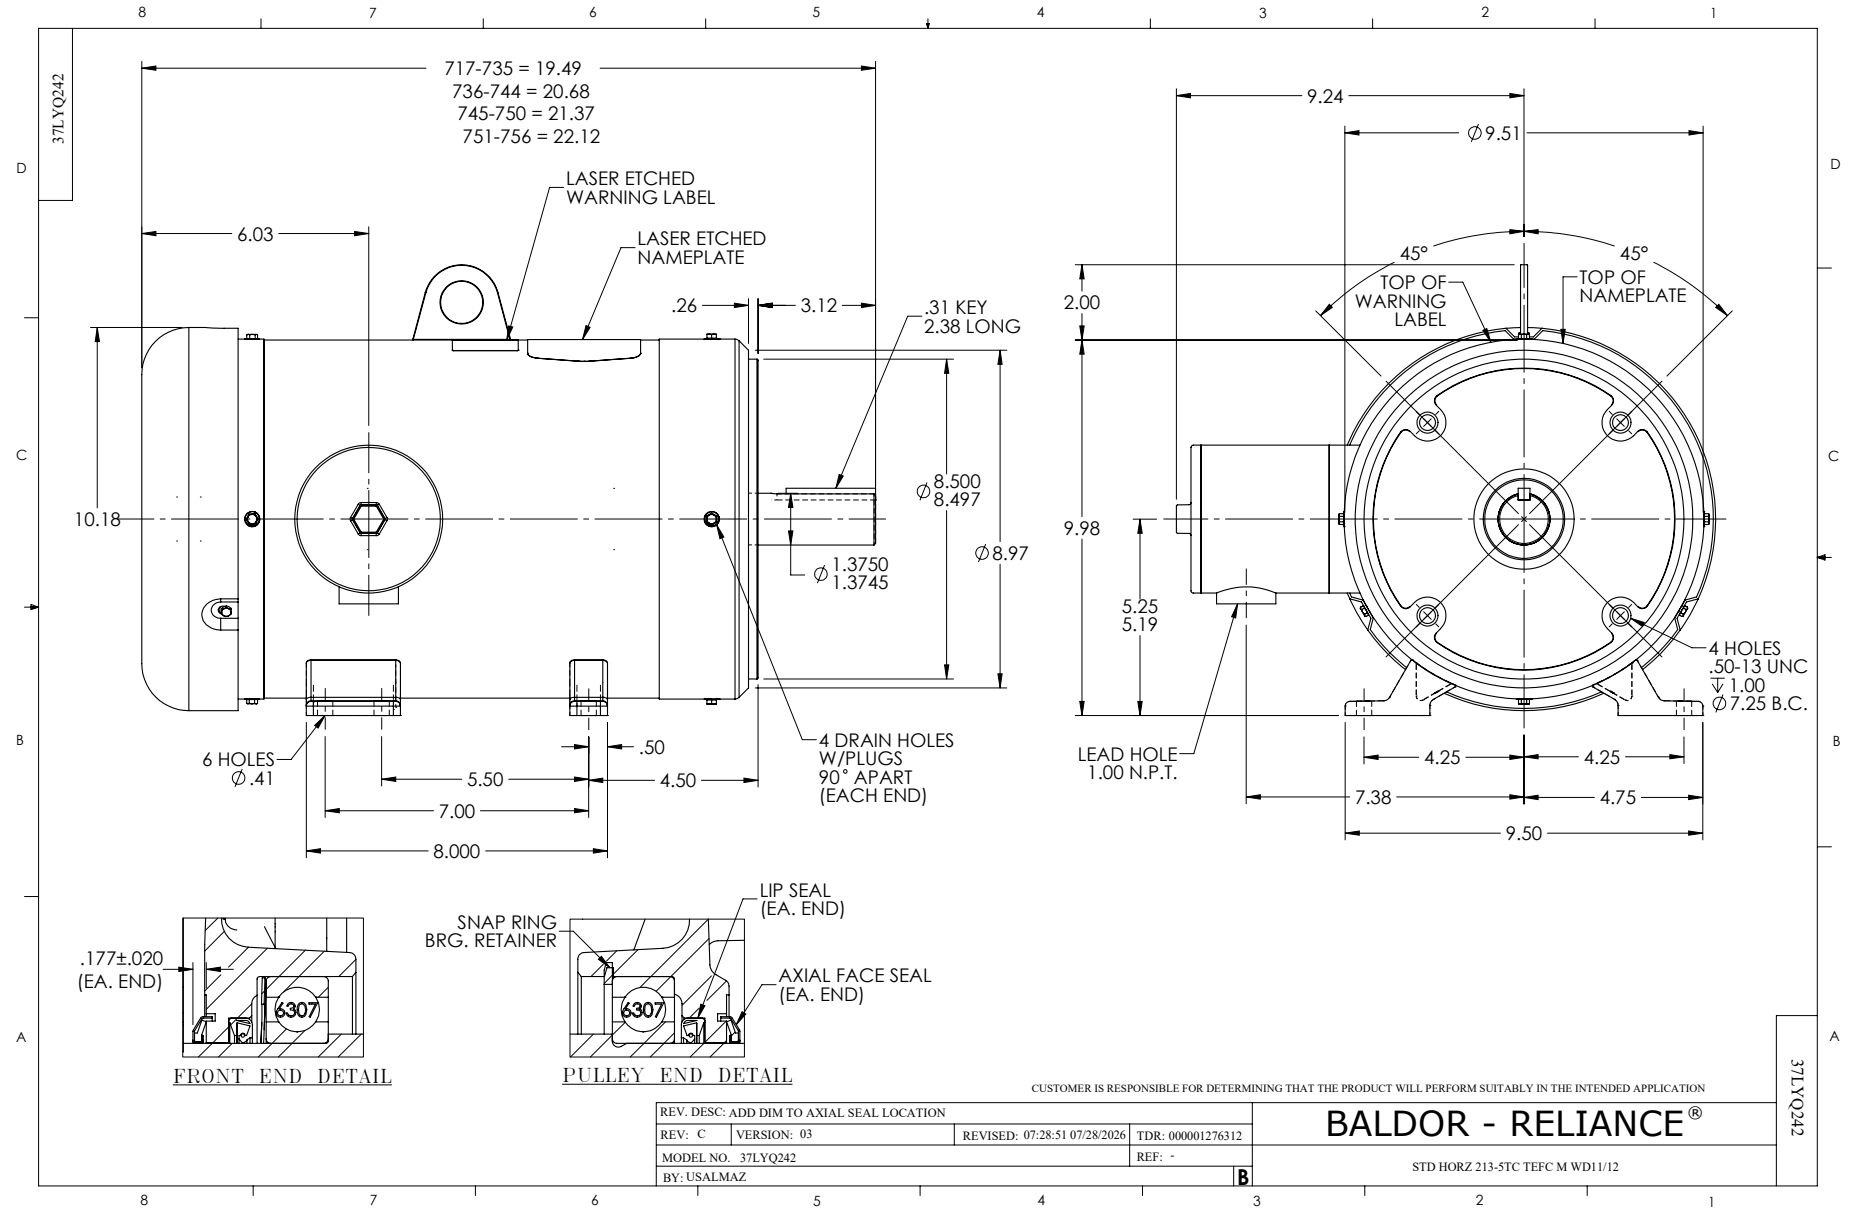TORQUES (LB-FT): PO=94.3 PU=41.3 LR=49.3 LRA=104





CD0006

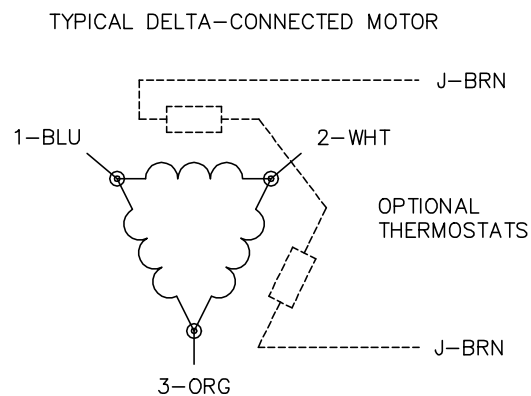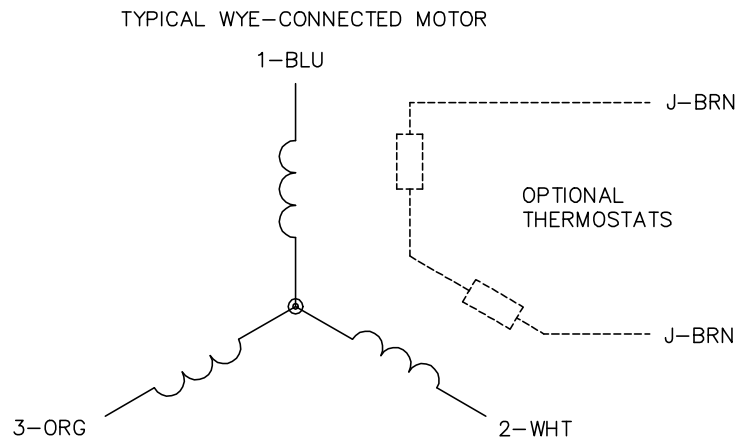
NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10: 24: 49 02/19/2019

BY: ENBRIRO

MTL: —


BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1