

ABB BALDOR RELIANCE III

Customer information packet

CM3538-8

.5HP, 1725RPM, 3PH, 60HZ, 56C, 3416M, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56C
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	200.0 V @ 60 HZ
Agency Approvals	C UR US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	2.200 A @ 200.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	74.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	2.2 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	L

Part Detail

Revision	J
Type	AC
Mech. spec.	34A062
Base	
Status	PRD/A
Elec. spec.	34WG0918
Layout	34LYA062
Eff. date	04-20-2026
CD Diagram	CD00006
Poles	04
Leads	3#18
Proprietary	False
Created date	11-14-2007

Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3416M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	11.35 IN
Power Factor	63
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.25
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L									
CAT.NO.	CM3538-8								
SPEC.	34A062-0918								
HP	.5								
VOLTS	200								
AMP	2.2								
RPM	1725								
FRAME	56C		HZ	60			PH	3	
SER.F.	1.25	CODE	L	DES	B	CLASS		B	
NEMA-NOM-EFF	74	PF	63						
RATING	40C AMB-CONT								
CC									
DE	6203		ODE	6203					
ENCL	TEFC	SN							
	SFA 2.6								

AC Induction Motor Performance Data

Record # 6622

Typical performance - not guaranteed values

Winding: 34WG0918-R001			Type: 3416M		Enclosure: TEFC		
Nameplate Data			200 V, 60 Hz: Single Voltage Motor				
Rated Output (HP)		.5	Full Load Torque		1.5 LB-FT		
Volts		200	Start Configuration		direct on line		
Full Load Amps		2.2	Breakdown Torque		6.1 LB-FT		
R.P.M.		1725	Pull-up Torque		3.9 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		4.6 LB-FT	
NEMA Design Code		B	KVA Code	L	Starting Current		13.4 A
Service Factor (S.F.)		1.25	No-load Current		1.7 A		
NEMA Nom. Eff.		74	Power Factor	63	Line-line Res. @ 25°C		7.49 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		65°C
S.F. Amps		2.6	Temp. Rise @ S.F. Load		77°C		
			Locked-rotor Power Factor		68		
			Rotor inertia		0.0381 LB-FT2		

Load Characteristics 200 V, 60 Hz, 0.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	31	46	57	68	74	79	74
Efficiency	54.9	67.7	73.4	75	75.2	74.5	75.2
Speed	1781	1767	1751	1734	1718	1697	1718
Line amperes	1.7	1.8	1.9	2.2	2.4	2.6	2.4


ABB Motors and Mechanical Inc.

WINDING # 34WG0918


Typical performance - not guaranteed values.

0.5 HP 3 PH 60 HZ 1725 RPM 200 V 3416M

TORQUES (LB-FT): PO=6.1 PU=3.9 LR=4.6 LRA=13.4

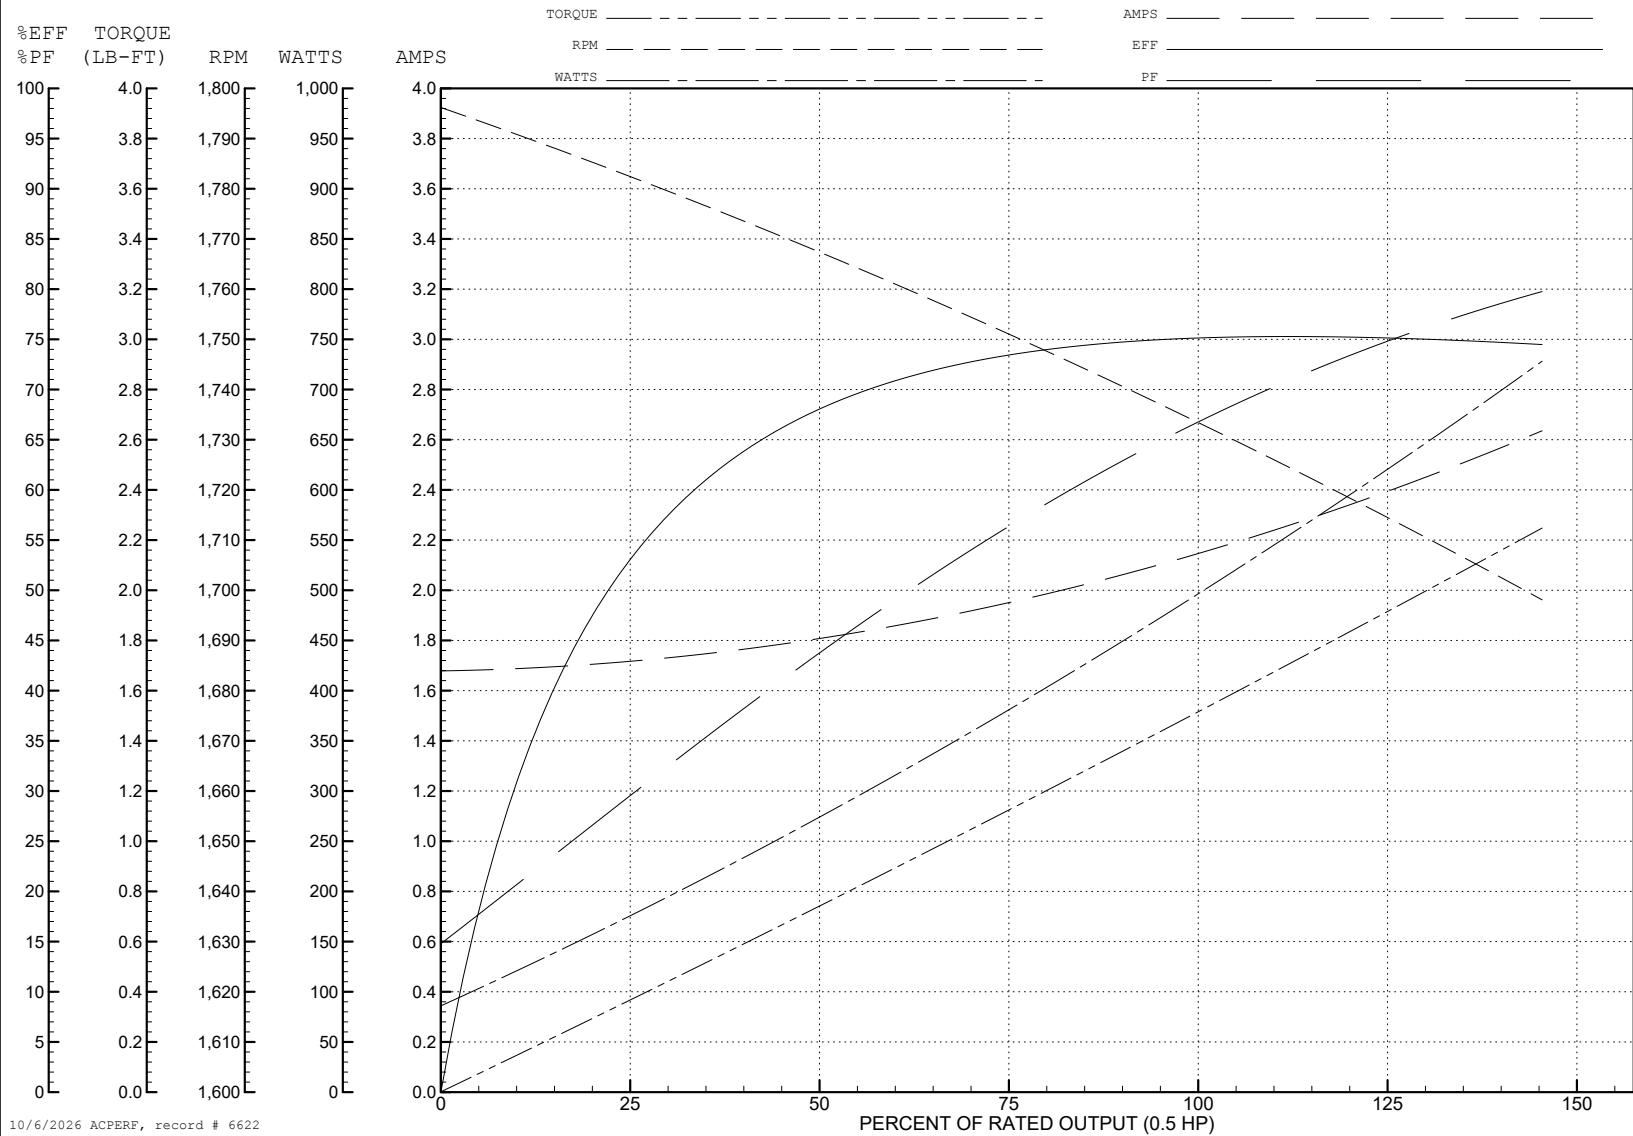

34LYA062

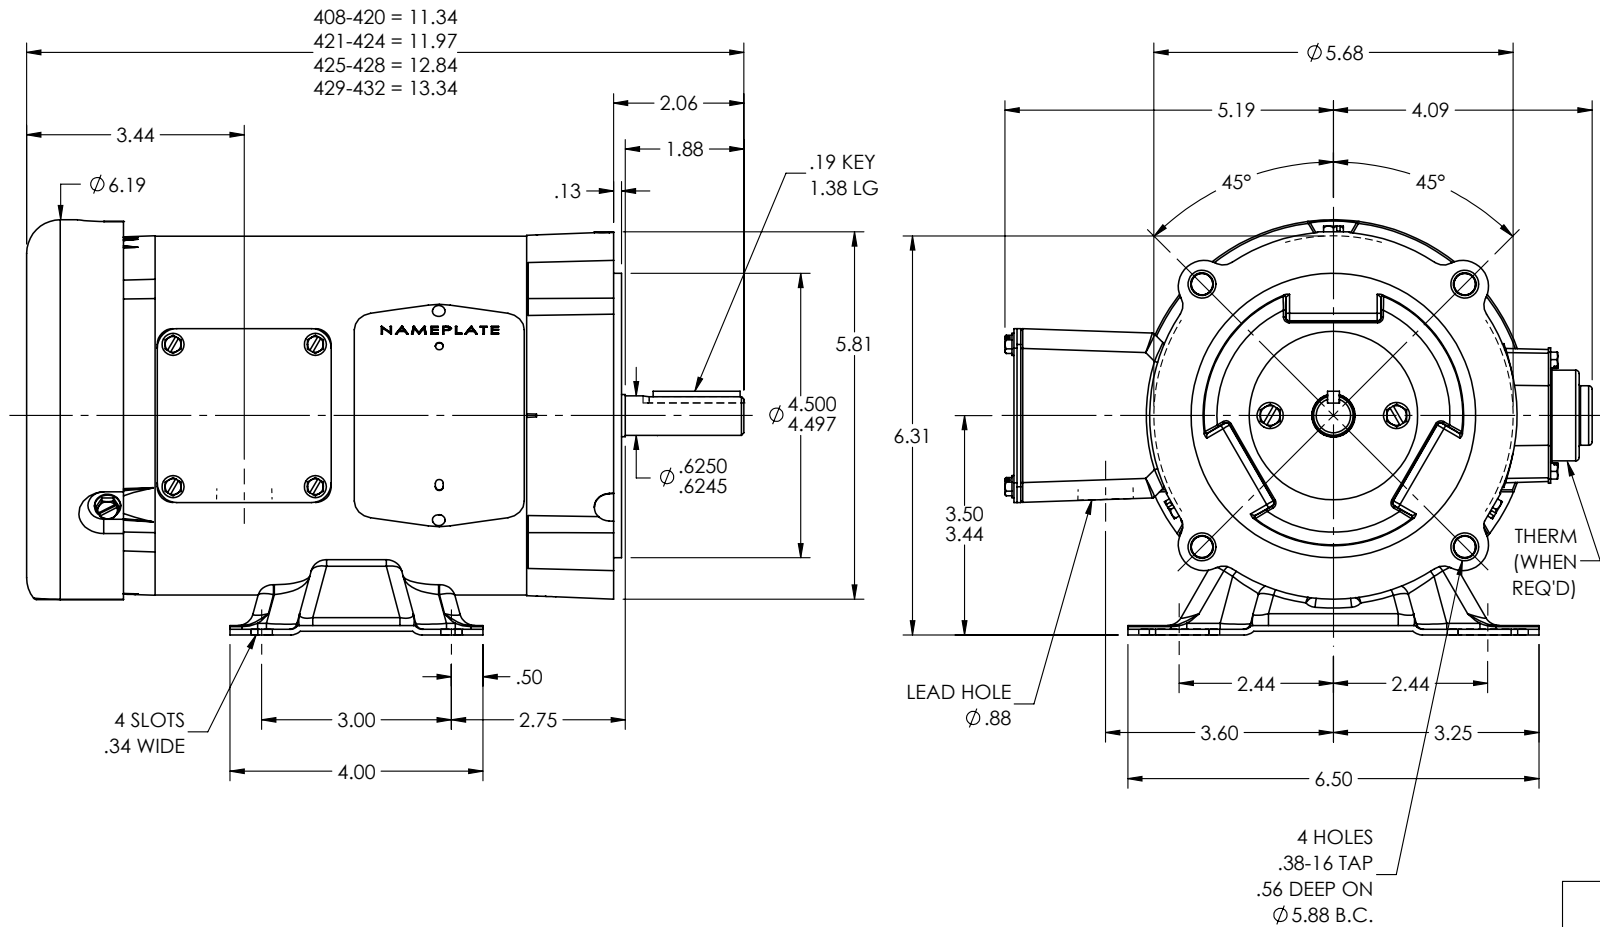

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: CLEAN UP DIMENSIONING

REV: U VERSION: 06 REVISED: 10:13:09 10/31/2024 TDR: 000001243684

34LYA062

MODEL NO. 34LYA062

BY: ENJEFD0




REF: -

BALDOR - RELIANCE®

STD HORZ 34M NEMA 56C TEFC

34LYA062

CD0006

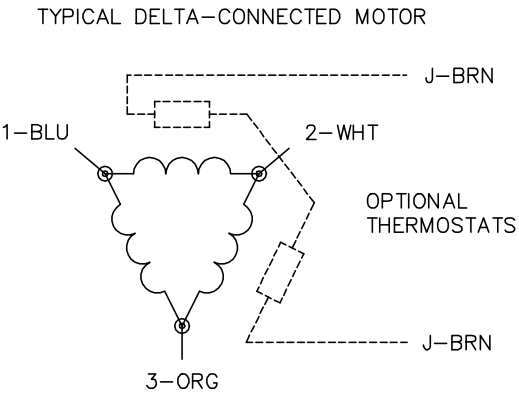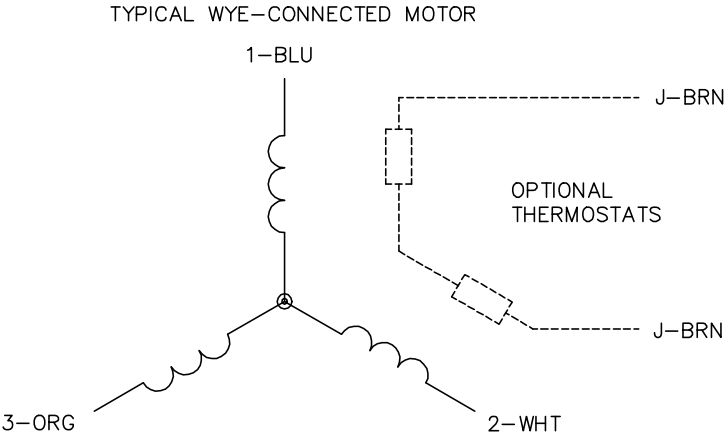

- NOTES:
1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
 2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
 5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO
MTL: —		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1